




Customer: ELFA AB
56-139-55

Transf. No. AA-98049
Designed: 1999-04-16 / ts

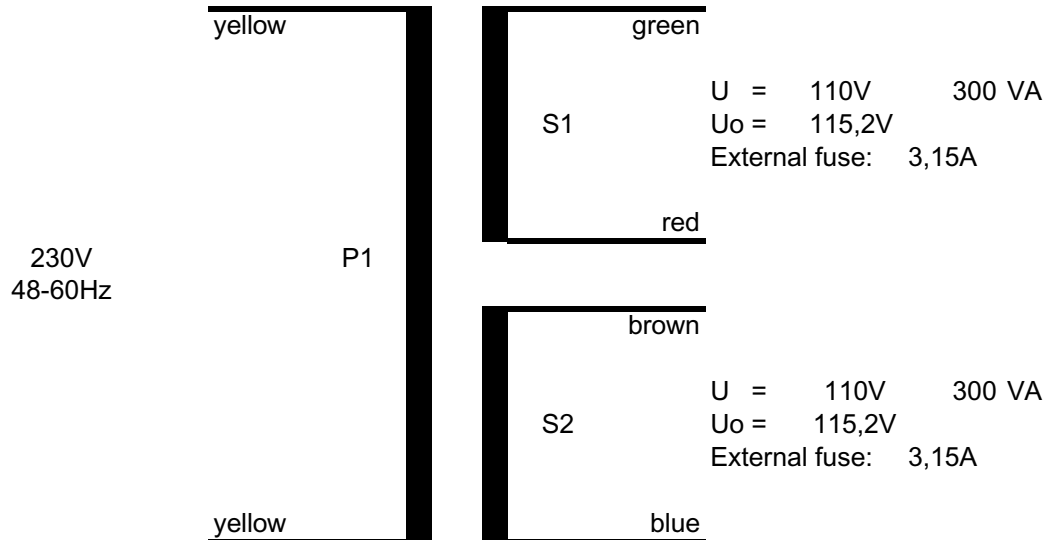

Classification

Protection against electrical shock:	Isolating Transformer
Protection index:	IP00
Protection against short-circuit and abnormal use:	Non-short-circuit proof
Time of operation:	Continuously
Intended use:	Incorporated
Ambient temperature / Material Classification:	Ta40/E

Assembling: Centre potted with a drilled centre hole with an insert nut type M8.
A rubber pad is glued at the bottom of the transformer.

Dimensions:

OD =	145	mm
H =	75	mm

Terminations:

Prim:	Multistranded Wire Style 3266.	Awg 18	L = 200mm
Sec:	Solid Copper insulated with tubes of Natvar.		L = 200mm

Label on the paper box.

	Toroid International AB
	Transf.No. AA-98049
	ELFA P/N: 56-139-55

Label on transformer.

	Toroid International AB	
	Transf.No. AA-98049	
	Prim. 230V 48-60Hz ye-ye	IP00 ta40/E
	Sec. 2x 110V 600 VA	gn-re/bn-bu



EC/EEA Declaration of conformity

Type of equipment: **Isolating Transformer**

Brand name: **Toroid**

Part no: **AA-98049**

Customer: **ELFA AB** **56-139-55**

<i>Manufactures:</i>	Toroid International (Pvt) Ltd PO Box 15, Phase 2, FTZ Katunayake, Sri-Lanka	Toroid International AB Box 3 351 03 Växjö, Sweden
	Toroid India Pvt Ltd Technopark Campus Trivandrum 695 581 Kerala, India	<i>Manufacture's representative within EEA:</i> Toroid International AB Box 3 351 03 Växjö, Sweden

As the manufacturer's authorised representative established within EEA, we declare that the product is in conformity with the provision of the EC directives: Low Voltage Directiven (LVD) 73/23/EEG, 93/68/EEG

*The product fulfils the requirements according to the following harmonised standards:
EN 61558-1, EN 60 950, EN 60 065 and IEC 601-1.*

All transformers have been inspected and tested with approved result according to the following:

1. Ocular inspection
2. No-load input current
3. No-load secondary voltage
4. Dielectric strength between primary an

The product is to be regarded as a modular component to be used in an electric apparatus that in turn has to fulfil the EMC - directives.

The product itself does not need to be EMC approved for CE marking according to directive 89/336/EEG, 92/31/EEG and 93/68/EEG

Date: 2003-05-07

Thomas Svensson / Design engineer