



Cisco Aironet Lightning Arrestor (AIR-ACC245LA-R)

November 9, 2004

This document describes the lightning arrestor kit and provides instructions for mounting the arrestor.

Introduction

Overvoltage transients can be created through lightning static discharges, switch processes, direct contact with power lines, or through earth currents. The Cisco Aironet AIR-ACC245LA-R Lightning Arrestor limits the amplitude and duration of disturbing interference voltages and improves the overvoltage resistance of in-line equipment, systems, and components. A lightning arrestor installed according to these mounting instructions balances the voltage potential, thus preventing inductive interference to parallel signal lines within the protected system.

The Cisco Aironet AIR-ACC245LA-R Lightning Arrestor is designed for use with Cisco Aironet access points and bridges but can be used Cisco Aironet radio device that utilizes an RP-TNC connector.

Warnings



Warning

Disconnect or switch off in-line equipment when installing or inspecting lightning arrestors during an electrical storm.



Warning

When connecting lightning arrestors, make sure that the succeeding equipment and components are disconnected or turned off.



Warning

This warning symbol means danger. You are in a situation that could cause bodily injury. Before you work on any equipment, be aware of the hazards involved with electrical circuitry and be familiar with standard practices for preventing accidents.



**Corporate Headquarters:
Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134-1706 USA**

Copyright © 2004 Cisco Systems, Inc. All rights reserved.



Warning

Do not work on the system or connect or disconnect cables during periods of lightning activity.

Installation Considerations

Cisco recommends that you bulkhead mount the lightning arrester so it can be installed as a wall feed through on the wall of the protected space.

The importance of obtaining a good ground and bonding connection cannot be overstressed. Consider these points when grounding the lightning arrester:

- Connect the lightning arrester components directly to the grounding point.
- The contact points of the ground connection must be clean and free of dust and moisture.
- Tighten threaded contacts to the torque specified by the manufacturer.

Installation Notes

This lightning arrester is designed to be installed between the antenna cable that is attached to an outdoor antenna and the Cisco Aironet wireless device. You can install the lightning arrester either indoors or outdoors. It can be connected directly to a wireless device having an external RP-TNC connector. It can also be mounted inline or as a feed-through. Feed-through installations require a 3/4 in. (19 mm) hole to accommodate the lightning arrester. See [Figure 1](#).



Note

This lightning arrester is part of a lightning arrester kit. The kit contains a lightning arrester, a grounding lug, and this instruction sheet.



Note

When you install the lightning arrester, follow the regulations or best practices applicable to lightning protection installation in your local area.


Installing the Lightning Arrester Outdoors

If you install the lightning arrester outdoors, use the supplied ground lug and a heavy wire (#6 solid copper) to connect it to a good earth ground, such as a ground rod. The connection should be as short as possible.

Installing the Lightning Arrester Indoors

If you install the lightning arrester indoors, place the wireless LAN device near a good source of ground, such as structural steel or the ground on an electrical panel. Ground the lightning arrester by using a heavy wire (#6 solid copper) and connect the ground wire to a good ground on the structural steel or electrical panel. The connection should be as short as possible.

Figure 1 Lightning Arrestor Details

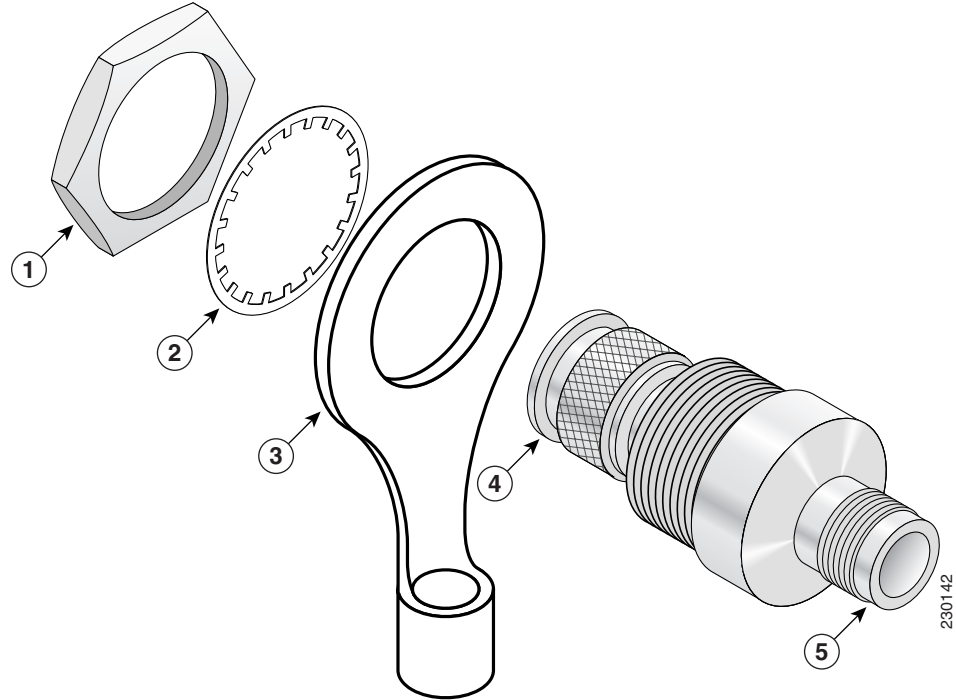

1	Nut	4	Protected side (to wireless device)
2	Lockwasher	5	Unprotected side (to antenna)
3	Ground lug		

Suggested Cable

Coaxial cable loses efficiency as the frequency increases, resulting in signal loss. The cable should be kept as short as possible because cable length also determines the amount of signal loss (the longer the run, the greater the loss).

Cisco recommends a high-quality, low-loss cable for use with the lightning arrestor.

Technical Specifications

Main path connectors	Unprotected side: TNC-R jack (female) Protected side: TNC-R plug (male)
Impedance	50Ω
Frequency range	0–5850 MHz
Return loss	≥ 20 dB
Insertion loss	≤ 0.2 dB
RF CW power	<= 60 W
Surge current handling capability	10 single / 5 multiple kA (test pulse 8/20 μs)
Residual pulse energy	250 microjoules typically (test pulse 4 kV 1.2/50 μs; 2kA 8/20 microseconds)
Weight	8 oz. (0.2 kg)
Operating temperature range	–40°F to 185°F (–40°C to 85°C)

CCVP, the Cisco logo, and Welcome to the Human Network are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn is a service mark of Cisco Systems, Inc.; and Access Registrar, Aironet, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, Follow Me Browsing, FormShare, GigaDrive, HomeLink, Internet Quotient, IOS iPhone, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, iQuick Study, LightStream, Linksys, MeetingPlace, MGX, Networkers Networking Academy, Network Registrar, PIX, ProConnect, ScriptShare, SMARTnet, StackWise, The Fastest Way to Increase Your Internet Quotient and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0711R)

Copyright © 2004 Cisco Systems, Inc. All rights reserved. ♻️ Printed in the USA on recycled paper containing 10% postconsumer waste.