

## 3-phase voltage monitoring relay

### EMR DU21D



EMR DU21D

- **Voltage monitoring in 3-phase mains**
- **Measuring range 230 ... 400 Vac 3Ph**
- **Monitoring of phase sequence and phase failure**
- **Detection of reverse voltage**
- **Connection of neutral wire optional**
- **2 changers**

#### Functions

Monitoring of phase sequence, phase failure and detection of return voltage (by means of evaluating the asymmetry).

#### Time ranges

Start-up suppression time: max. 500 ms

Tripping delay: max. 350 ms

#### Indicators

Green LED ON: indication of supply voltage

Yellow LED ON/OFF: indication of relay output

#### Output relay

2 potential free change-over contacts

Rated voltage: 250 Vac

Switching capacity (distance <5 mm): 750 VA (3 A / 250 Vac)

Switching capacity (distance >5 mm): 1250 VA (5 A / 250 Vac)

Fusing: 5A fast acting

#### Connecting voltages

3(N) ~230/400 V, Terminals (N)-L1-L2-L3 (= supply voltage)

Tolerance: 3(N) ~230/400 V, 3(N) ~342 ... 457 V

#### Reference data

Selectron® EMR	Article no.
DU21D 230 ... 400 Vac 3Ph	41230001
(Order data see chapter 1)	

# 3-phase voltage monitoring relay

## EMR DU21D

Technical data	
Nominal consumption	3(N) ~230/400 V, 9 VA
Nominal frequency	48 ... 63 Hz
Drop-out voltage	>20% of the supply voltage
Recovery time	500 ms
Measuring circuit: Input:	
	3(N) ~230/400 V      Terminals (N)-L1-L2-L3 (= supply voltage)
Overload capacity:	
	3(N) ~230/400 V      3(N) ~264/457 V
Input resistance:	
	3(N) ~230/400 V      15 kΩ
Asymmetry:	typ. 30%

### Type key

EMR D U 2 1 D ...	
<b>Construction</b>	<b>Special functions</b>
D Industrial design 22.5 mm	1 = Additional asymmetry monitoring
S pluggable 11 poles	
<b>Function</b>	<b>Measuring circuit</b>
U Voltage	A No measuring circuit
I Current	B 3(N)~115/66 Vac
P CosPhi	C 3(N)~230/132 Vac
T Temperature	D 3(N)~400/230 Vac
S Star-Delta	E 1 ≅ 30/60/300 Vac/dc
	F 1 ≅ 100mA/1A/10A ac/dc
	G PTC
	H CosPhi
	I 12 Vdc
	J 24 Vdc
	K 36 Vdc
	L 48 Vdc
	M 1~110 Vac
	N 1~230 Vac
	O 1 A
	P 5 A
<b>Output</b>	<b>Connecting voltage</b>
1 1 changer	1 Measuring circuit
2 2 changers	2 24...240 Vac/dc
3 1 NC contact / 1 NO contact	3 230 Vac


# 3-phase voltage monitoring relay

EMR DU21D

## Function description


### Phase sequence monitoring

When all the phases are connected in the correct sequence and the measured asymmetry is less than the fixed value, the output relays switch into on-position (yellow LED illuminated). When the phase sequence changes, the output relays switch into off-position (yellow LED not illuminated).

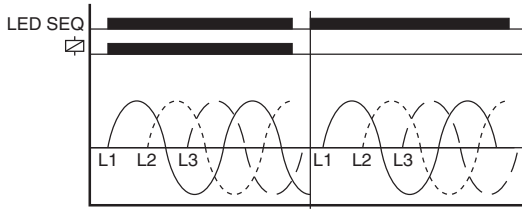

### Phase failure monitoring


When one of the three phases fails, the output relays switch into off-position (yellow LED not illuminated).

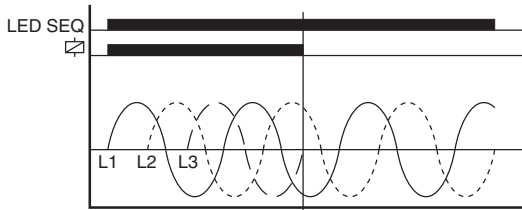


### Detection of reverse voltage (by means of evaluation of asymmetry)

The output relays switch into off-position (yellow LED not illuminated) when the asymmetry between the phase voltages exceeds the fixed value of the asymmetry.


An asymmetry caused by the reverse voltage of a consumer (e.g. a motor which continues to run on two phases only) does not effect the disconnection.

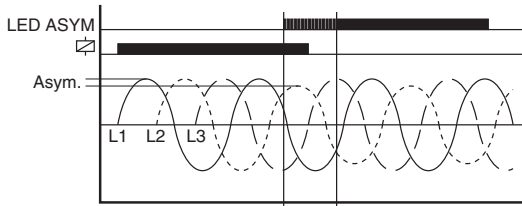

## Connection

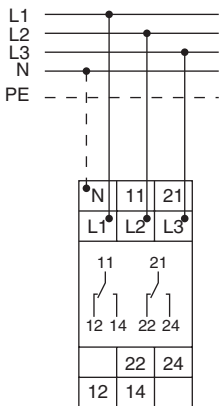

## Dimensions

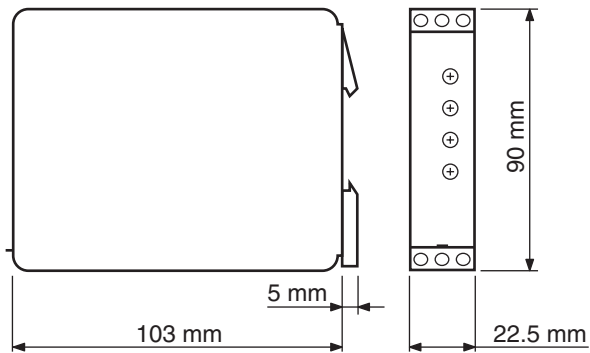

## Technical safety advice

This manual contains the information necessary for the correct utilisation of the products described therein. It is intended for technically qualified persons who are involved as either

- planning engineers familiar with the safety concepts of automation technology;
- or, operating personnel, who have been instructed in handling automation equipment and have a knowledge of the contents of this manual concerning operation;
- or, installation and servicing personnel possessing the necessary training to repair such an automation system or who have the authority to put such circuits and equipment/systems into operation, to earth or label them according to the relevant safety standards.

The products are constructed, manufactured and tested in compliance with the relevant VDE standards, VDE specifications and IEC recommendations.

### Danger warning

These warnings serve both as a guide for those persons involved in a project and as safety advice to prevent damage to the products themselves or to associated equipment.

Due to advancements in technology, the wiring diagram on the actual device may be different than shown in this catalogue. In all instances where the actual device diagram is different, the wiring diagram on the device must be used when electrical connections are made.

### Correct utilisation, configuration and assembly

The equipment is to be used only for the applications stated in the catalogue and technical literature, and only in conjunction with auxiliary equipment and devices that are recommended or approved by Selectron Systems Ltd.

Further, it should be noted that:

- the automation equipment must be disconnected from any power supply before it is assembled, disassembled or the configuration modified.
- Solid state electronic switches must not be tested with incandescent lamps or connected to a load that exceeds its rating.
- trouble-free and safe operation of the

products requires correct transportation as well as appropriate storage, assembly and wiring.

- the systems may only be installed by trained personnel. In doing so, the relevant requirements contained in VDE 0100, VDE 0113, IEC 364, etc. must be complied with.

### Prevention of material damage or personal injury

Additional external safety devices or facilities must be provided wherever significant material damage or even personal injury could result from a fault occurring in an automation system. A defined operating status must be ensured or forced by such devices or facilities (e.g. by independent limit switches, mechanical interlocks, etc.).

### Advice concerning planning and installation of the products

- The safety and accident prevention measures applicable to a specific application are to be observed.
- In the case of mains-operated equipment, a check is to be made before putting it into operation to ensure that the preset mains voltage range is suitable for the local supply.
- In the case of a 24 V supply, care must be taken to ensure sufficient electrical insulation of the secondary side. Use only mains power supply units that conform to IEC 364-4-41 or HD 384.04.41 (VDE 0100 Part 410).
- Automation systems and their operating elements are to be installed in such a way that they are sufficiently protected against accidental operation.

### Warranty

Selectron Systems Ltd. warrants its products to be free from defects in material and workmanship for a period of one year from the date of shipment. All claims under this warranty must be made within thirty (30) days of the discovery of the defect, and all defective products must be returned at the buyer's expense. Buyer's sole and exclusive right will be limited to, at the option of Selectron Systems Ltd., the repair or replacement by Selectron Systems Ltd., of any defective products for which a claim is made.

In all other matters please refer to the "General terms of business" concerning Selectron Systems Ltd.

### Note

The information given in this documentation corresponds to the state of development at the time of going to press and is therefore not binding. Selectron Systems Ltd. reserves the right to make alterations in the interests of technical advancement or product improvement at any time without giving reasons for doing so.

## Prescriptions and standards

<b>Mechanical data</b>	
Housings in self-extinguishing plastic material. Protection mode IP 40	
Mounting: snapping mode:	Fixing on profile rail according DIN 46277/3 (EN 50 022)
Connection	via contact protected terminals up to 4 mm <sup>2</sup> , protecting mode IP 20
<b>Environmental conditions</b>	
Admissible environmental temperatures from -25 °C ... +55 °C (corresponds IEC 68-1)	
Storage and transport temperature from -25 °C ... +70 °C	
Application class	IEC 721-3-3 (EN 60721-3-3)
<b>Output relay</b>	
Electrical lifetime:	230 Vac, min. 2x10 <sup>5</sup> switching cycles at 1000 VA ohmic load.
Mechanical lifetime:	min. 20 x 10 <sup>6</sup> switching cycles
Contact material	AgNi
Frequency range	48 ... 400 Hz / 24 ... 240 Vac, 16 ... 48 Hz / 24 ... 48 Vac
Duration of operation	100%
<b>Protection</b>	
Protection of the unit	5 A fast
<b>Terminals</b>	
Contact protection according VDE 0106 and VBG 4	
Terminal type:	sleeve with indirect screw pressure
Wire to connect:	rigid or flexible
Connecting limit:	4 mm <sup>2</sup>
Terminal variants:	1 wire 0,5 mm <sup>2</sup> ... 2,5 mm <sup>2</sup> with/without wire end covers
	1 wire 4 mm <sup>2</sup> without wire end covers
	2 wires 0,5 mm <sup>2</sup> ... 1,5 mm <sup>2</sup> with/without wire end covers
	2 wires 2,5 mm <sup>2</sup> flexible without wire end covers
max. screw in torque:	1,0 Nm
Terminal screw for screw driver with PZ-1	
<b>Insulation</b>	
Isolation nominal voltage:	250 Vac (corresponds to IEC 60664-1)
Rating surge voltage:	4 kV, over-voltage category III, corresponds to IEC 60664-1
<b>Electromagnetic compatibility</b>	
Electrostatic discharge: Level 3, 6 kV contact, 8 kV air (corresponds to IEC 1000-4-2)	
High frequency electromagnetic fields: Level 3, 10 V/m (corresponds to IEC 1000-4-3)	
Fast transients: Level 4, 4 kV / 2,5 kHz, 5/50 ns (corresponds to IEC 1000-4-4)	
Lightning discharge: Level 3, 2 kV com., 1 kV dif., (corresponds to IEC 1000-4-5)	
Cable running disturbances inducted by HF fields: Level 3, 10 V RMS (corresponds to IEC 1000-4-6)	
Spurious radiation net and aerial network: Class B (corresponds to CISPR 22)	
<b>Prescriptions</b>	
Air and leakage paces:	VDE 0110iGr. C/250
Test voltage:	VDE 0435 2000Vac
Low voltage directions according to IEC 664-1	
EMC emissions:	EN 50 081-1 and EN 55 022 class B
EMC interference stability:	Voltage impact strength according to IEC 1000-4-5
Burst:	EN 50 082-2, EN 61 812-1 (level 3)
ESD:	IEC 1000-4-2
HF over metallic circuits:	EN 50 082-2, ENPr 50141
Electro magnetic HF field according to EN 50 082-2, ENPr 50140 and ENPr 50204	
Production standard:	according to ISO 9001