

PA1000

Single Phase AC Power Analyzer Datasheet



The Tektronix PA1000 is a single-phase, single-channel power analysis solution that is optimized for fast, efficient, and accurate power consumption testing to international standards. Its compact size, DMM-like user-interface, graphical display, and powerful software enable users to quickly visualize, analyze, and document the power consumption efficiency of next-generation devices, including standby power measurements and harmonic analysis.

Key specifications

- 1 MHz bandwidth
- 5 mW standby power measurements
- Harmonic analysis to the 50th order (standard)
- +/- 0.04% basic accuracy
- 20 μ A to 20 Arms direct current input
- 1 V to 600 Vrms (Cat II) voltage input
- USB, LAN, and GPIB interfaces (standard)
- Three-year warranty

Essential power measurement tool for the R&D bench

- Harmonic analysis to IEC/EN 61000-3-2 / 4-7 (pre-compliance testing to the 50th order)
- Standby power analysis to IEC 62301 / EN 50564 (full compliance testing as low as 5mW)
- Supports additional testing to CE, EnergyStar, CEC, SPEC Power[®] 1, CQC-3146, NOM-32-ENER-2013, and more
- Transient analysis with 1M sample/sec continuous sampling
- Measure voltage, current, power, VA, WHr, THD, PF, CF, and more
- Convenient front-panel banana jack inputs, color graphical display, and PWRVIEW software to simplify usage and boost productivity
- Optional breakout test box simplifies AC line connections between your device under test and the PA1000

Applications


Power, energy, standby power, and harmonics measurements for:

- Power supply and UPS
- LED drivers / lighting
- Wireless charging
- Consumer electronics
- Home appliances
- Computers and IT equipment
- Inverters and converters
- Battery chargers

¹ Spec Power[®] is a registered trademark of the Standard Performance Evaluation Corporation (SPEC)

Complete power consumption analysis


Most of today's AC-powered electronics and electro-mechanical products have government or consumer efficiency regulations they must meet. The PA1000 simplifies the process of proving that designs meet these requirements by offering a complete bench-top solution for single phase power consumption analysis. Use the standard front-panel input jacks and optional breakout box to simplify connections to the device under test, then analyze and document the results with the free PWRVIEW software.

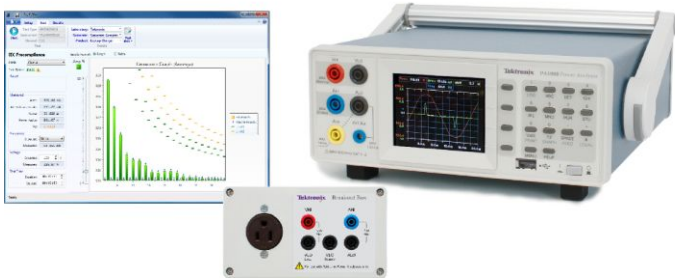


Easily and accurately measure harmonic performance, standby power, and more with the PA1000, optional breakout box, and free PWRVIEW software

Visualize signals

The color graphics display on the PA1000 provides intuitive readout of measured values, harmonic bar charts, waveforms, energy integration plots, and more. Setup is easy using the menu-driven interface and soft keys.

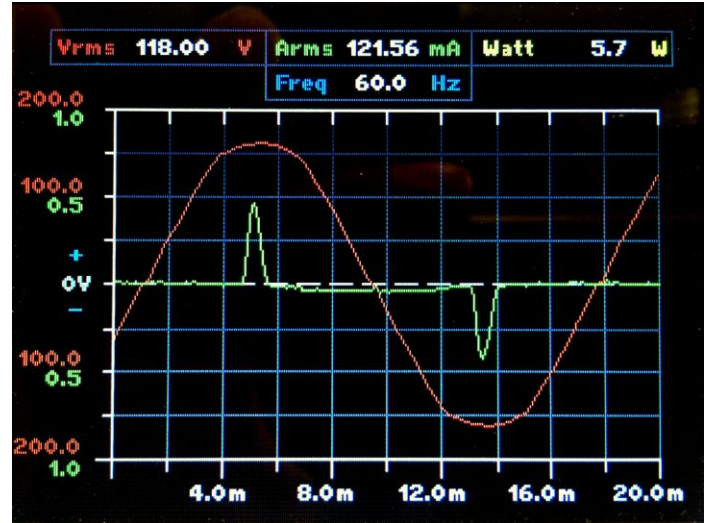

Full color waveform display

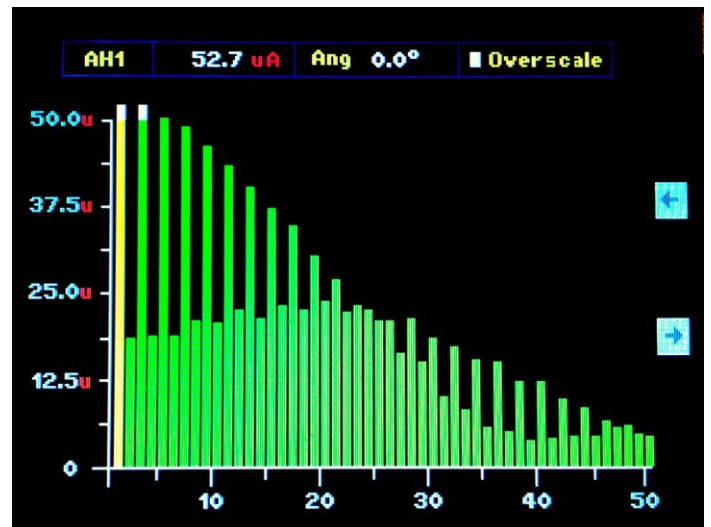

Harmonic bar chart display mode

Specifications

Available measurements

V _{rms} - Volts RMS	VTHD - Volts Total Harmonic Distortion
	V _{DF} - Voltage distortion factor
A _{rms} - Amps RMS	ATHD - Amps Total Harmonic Distortion
	A _{DF} - Current distortion factor
WATT - True power	Z - Impedance
VA - Apparent power	R - Resistance
VAR - Reactive power	X - Reactance
FREQ - Frequency	HR - Integrator time
PF - Power factor	WHr - Watt Hours
VPK+ - Volts peak (positive)	VAHr - VA Hours
VPK- - Volts peak (negative)	VARHr - VAR Hours
APK+ - Amps peak (positive)	AHr - Amp Hours
APK- - Amps peak (negative)	Vh - Volts harmonics
VDC - Volts DC	Ah - Amps harmonics
ADC - Amps DC	
VCF - Voltage crest factor	
ACF - Current crest factor	

Voltage and current ranges

Voltage ranges	1000 V _{peak} , 500 V _{peak} , 200 V _{peak} , 100 V _{peak} , 50 V _{peak} , 20 V _{peak} , 10 V _{peak}
Current ranges (20 A shunt)	100 A _{peak} , 50 A _{peak} , 20 A _{peak} , 10 A _{peak} , 5 A _{peak} , 2 A _{peak} , 1 A _{peak} , 0.5 A _{peak} , 0.2 A _{peak} , 0.1 A _{peak}
Current ranges (1 A shunt)	2.0 A _{peak} , 1.0 A _{peak} , 0.4 A _{peak} , 0.2 A _{peak} , 0.1 A _{peak} , 0.04 A _{peak} , 0.02 A _{peak} , 0.01 A _{peak} , 0.004 A _{peak} , 0.002 A _{peak}

Measurement accuracy - voltage

Voltage accuracy, V_{RMS} (45 Hz to 850 Hz)	± 0.04% of Reading ± 0.04% of Range ± 0.005 V
Voltage accuracy, V_{RMS} (10 Hz to 45 Hz, 850 Hz to 1 MHz, typical)	± 0.1% of Reading ± 0.1% of Range ± (0.02*F)% of Reading ± 0.05 V
Voltage accuracy, DC (typical)	± 0.1% of Reading ± 0.1% of Range ± 0.05 V
Effect of common mode (typical)	100 V, 100 kHz < 500 mV

Measurement accuracy - current

Current accuracy, A_{RMS} (45 Hz to 850 Hz) ²	± 0.04% of Reading ± 0.04% of Range ± (1.8 μV/Z _{ext})
Current accuracy, A_{RMS} (10 Hz to 45 Hz, 850 Hz to 1 MHz, typical)	± 0.1% of Reading ± 0.1% of Range ± (0.02*F)% of Reading ± (50 μV/Z _{ext})
Current accuracy, DC (typical)	± 0.1% of Reading ± 0.1% of Range ± (100 μV/Z _{ext})

² Offset is valid in low bandwidth, with internal shunts, and after a manual zero has been performed. Offset is 10 μV/Z_{ext} in high bandwidth, and with external shunt.

Current - peak inrush accuracy (100 A_{peak} range)	2% of Range ± 20 mA
Effect of common mode (typical)	100 V, 100 kHz, 20 A shunt < 15 mA
	100 V, 100 kHz, 1 A shunt < 500 μA
	100 V, 100 kHz, external shunt < 40 mV

Measurement accuracy - frequency

Frequency (10 Hz to 20 kHz)	0.1% of Reading, with the peak of the signal extending 10% above and 10% below the DC level
Frequency (20 kHz to 1 MHz)	0.1% of Reading, with the peak of the signal extending 25% above and 25% below the DC level

Measurement accuracy - power

Watts accuracy	± 0.075% of Reading ± 0.075% of Range (PF=1, 45 - 850 Hz)
VA accuracy	(V _{rms} ^{acc} x A _{rms}) + (A _{rms} ^{acc} x V _{rms})
VAR accuracy (typical)	$\sqrt{[VA \pm VA_{error}]^2 - [W \pm W_{error}]^2} - \sqrt{VA^2 - W^2}$
PF Accuracy	$\cos \theta - \cos [\theta \pm (V_{h1} \text{ ph.err} \pm A_{h1} \text{ ph.err})] \pm 0.002$

Measurement accuracy - harmonic magnitude and phase (typical)

Voltage harmonics magnitude (10 Hz to 480 kHz)	± 0.02% of Reading ± 0.1% of Range ± (0.04*F)% of Reading ± 0.05 V
Voltage harmonics phase	± 0.04 ± [0.01 * (V _{range} / V _{reading})] ± (0.1 / V _{range}) ± (0.005 * F)
Current harmonics magnitude (10 Hz to 480 kHz)	± 0.2% of Reading ± 0.1% of Range ± (0.04*F)% of Reading ± (50 μV / Z _{ext})
Current harmonics phase	± 0.04 ± [0.01 * (A _{range} / A _{reading})] ± (0.001 / A _{range} * Z _{ext}) ± (0.005 * F)

Physical characteristics

Dimensions	mm	in
Height	102	4.0
Width	223	8.7
Depth	285	11.2
Weight	Kg	lb
Net (without lead set)	3.2	7.0
Temperature	C	F
Operating	0 °C to +40 °C	+32 °F to +102 °F
Nonoperating	-20 °C to +60 °C	-4 °F to +140 °F

Notes:

All stated accuracies are based upon a minimum of a 30-minute warm-up period.

Z_{ext} is the external shunt impedance used and must be less than or equal to 10 Ohms.

If no frequency is measured, then the signal is considered DC for the purpose of accuracy.

F is the frequency measured in kHz. In the case of harmonics, F is the harmonic frequency.

Specifications are valid from 1 to 100% of range in low bandwidth and after a manual zero has been performed. Values below 1% are typical.

In high bandwidth, specifications are valid when the signal is greater than 10% of the range.

Harmonic specifications are always valid when the harmonic is greater than 2% of the range.

Measurement conditions during calibration: Instrument default settings unless otherwise stated, sine waves applied to V and I inputs, 30 min warm up, ambient temperature 23 °C ±5 °C.

Ordering information

Models

PA1000 Single-phase power analyzer

Standard accessories

Voltage lead set

Country-specific power cord

USB host-to-device interface cable

Documentation CD Includes user manual in English, French, German, Spanish, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, and Russian languages.

Certificate of calibration Documents the traceability to National Metrology Institute(s) and ISO9001 Quality System Registration

Three year product warranty

Recommended accessories

BB1000-NA Breakout box (North America plug configuration)

BB1000-EU Breakout box (Europe plug configuration)

BB1000-UK Breakout box (United Kingdom plug configuration)

BALLAST-CT Specialty current transducer for lamp ballast testing

CL200 Current clamp, 1 A - 200 A, for Tektronix Power Analyzers

CL1200 Current clamp, 0.1 A - 1200 A, for Tektronix Power Analyzers

PA-LEADSET Replacement lead set for Tektronix Power Analyzers (one channel lead set)



BB1000-NA breakout box

The Tektronix breakout box provides an easy way to make wiring connections between your device under test and the Tektronix power analyzer. Your device power cord plugs directly into the outlet on the breakout box (choose the version that best matches the connector style for your geography).

Connection to the power analyzer is then simple, using the standard input lead set with 4 mm safety banana connectors that are provided as a standard accessory with the power analyzer.

Power plug options

Opt. A0	North America power plug (115 V, 60 Hz)
Opt. A1	Universal Euro power plug (220 V, 50 Hz)
Opt. A2	United Kingdom power plug (240 V, 50 Hz)
Opt. A3	Australia power plug (240 V, 50 Hz)
Opt. A4	North America power plug (240 V, 50 Hz)
Opt. A5	Switzerland power plug (220 V, 50 Hz)
Opt. A6	Japan power plug (100 V, 50/60 Hz)
Opt. A10	China power plug (50 Hz)
Opt. A11	India power plug (50 Hz)
Opt. A12	Brazil power plug (60 Hz)
Opt. A99	No power cord

Service options

Opt. C3	Calibration Service 3 Years
Opt. C5	Calibration Service 5 Years
Opt. D1	Calibration Data Report
Opt. D3	Calibration Data Report 3 Years (with Opt. C3)
Opt. D5	Calibration Data Report 5 Years (with Opt. C5)
Opt. R5	Repair Service 5 Years (including warranty)
Opt. R5DW	Repair Service Coverage 5 Years (includes product warranty period). 5-year period starts at time of instrument purchase



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.

PA1000 Power Analyzer

ASEAN / Australasia (65) 6356 3900
Belgium 00800 2255 4835*
Central East Europe and the Baltics +41 52 675 3777
Finland +41 52 675 3777
Hong Kong 400 820 5835
Japan 81 (3) 6714 3010
Middle East, Asia, and North Africa +41 52 675 3777
People's Republic of China 400 820 5835
Republic of Korea +822 6917 5084, 822 6917 5080
Spain 00800 2255 4835*
Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835*
Brazil +55 (11) 3759 7627
Central Europe & Greece +41 52 675 3777
France 00800 2255 4835*
India 000 800 650 1835
Luxembourg +41 52 675 3777
The Netherlands 00800 2255 4835*
Poland +41 52 675 3777
Russia & CIS +7 (495) 6647564
Sweden 00800 2255 4835*
United Kingdom & Ireland 00800 2255 4835*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Canada 1 800 833 9200
Denmark +45 80 88 1401
Germany 00800 2255 4835*
Italy 00800 2255 4835*
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Norway 800 16098
Portugal 80 08 12370
South Africa +41 52 675 3777
Switzerland 00800 2255 4835*
USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com.

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.



17 Jul 2015 55W-29535-2

www.tektronix.com

Tektronix[®]

