

Wiha Torque VDE screwdrivers.

Precise with repeat accuracy.




product
design
award

2011



Focus Open
Silver 2011

slimTECHNOLOGY

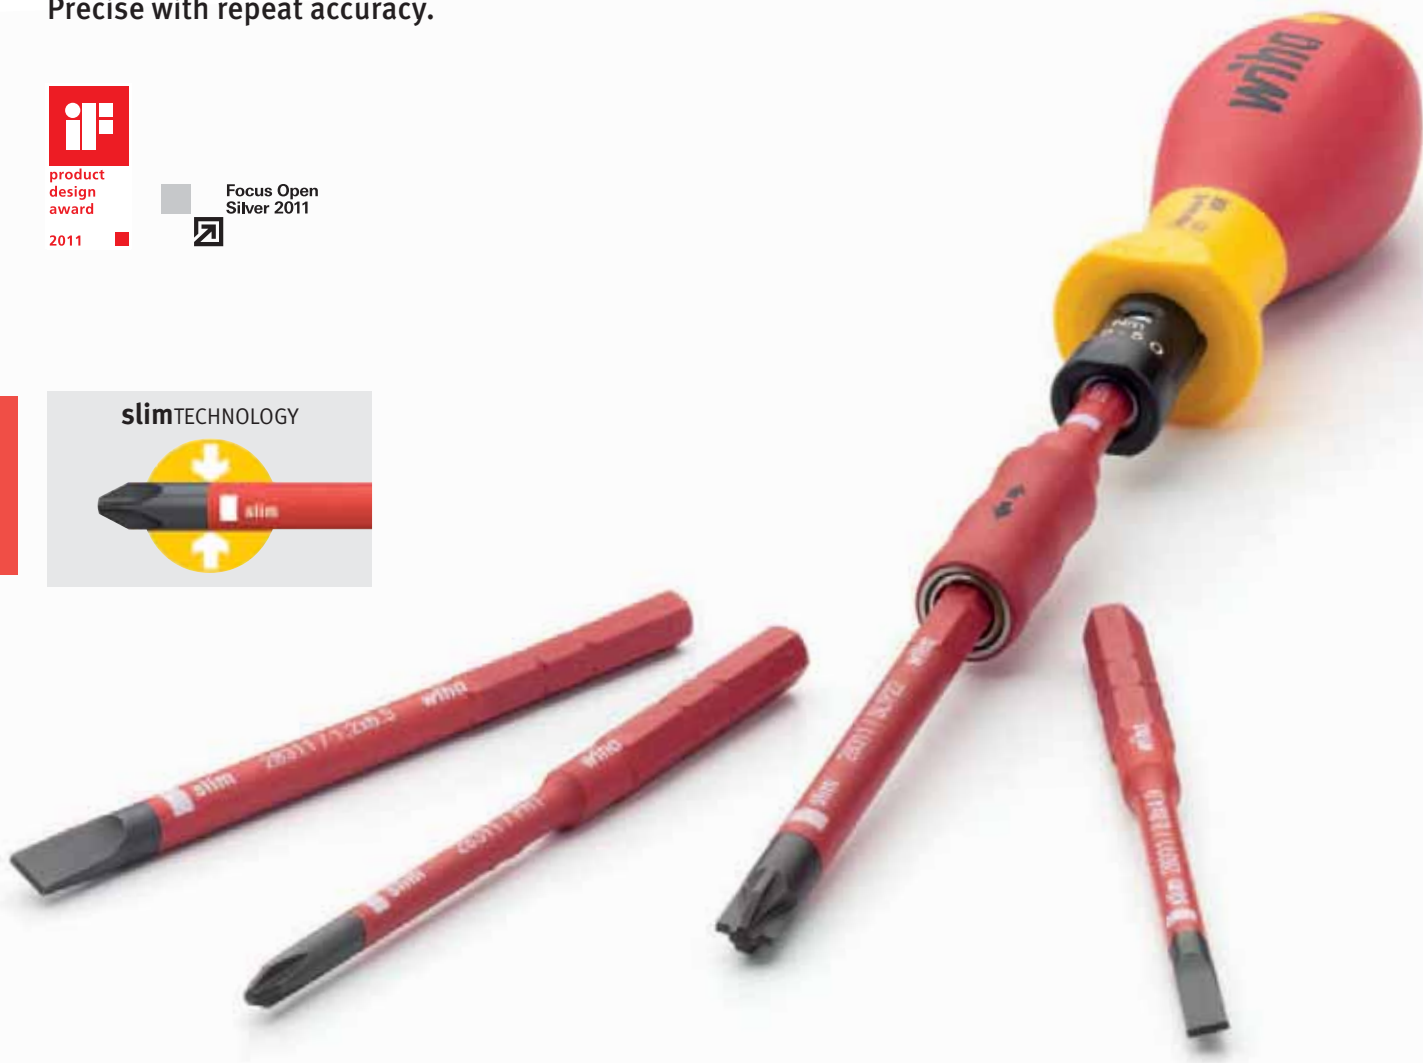

TorqueVario®-S VDE. Completely certified VDE torque system.

The TorqueVario®-S VDE with integrated scale in combination with the slimTorque VDE bit holder and slimBits offer controlled tightening of screws with simultaneous user safety fo



slimTECHNOLOGY:
Up to 33% narrower bits ensures unimpeded access to low-lying fastenings/ spring elements in the critical working area.



In type-tested switchgear systems, the torque to be observed is specified by all manufacturers.



Wiha Torque VDE screwdrivers.

- Clearly audible and perceptible click on attaining the pre-set torque
- Torque accuracy $\pm 6\%$ of the pre-set scale value
- Delivered with factory calibration certificate
- Safety when working with live equipment up to 1,000 V AC and 1,500 V DC
- Fulfills all accuracy requirements as defined by EN ISO 6789, BS EN 26789 and ASME B 107.14M



Wiha slimTorque VDE bit holder.

- Absolute safety even if mistakes are made: no metal connection between the bit holder and blade tang

Wiha Torque VDE screwdrivers.

slimTorque starter set.



1000 V
IEC 60900:2012

2872 T9

slimTorque starter set, 9-pcs.

Torque value can be set via window scale.

With slimTorque VDE bit holder for 6 mm slimBits.

- Handle: VDE torque handle 1.0 - 5.0 Nm, steplessly adjustable with Torque Setter adjusting tool (included in delivery).
- Bit holder: Insulated metal ClicFix bit holder locks all slimBits reliability. Only for 6 mm slimBits.
- Bits: Protective insulation moulded directly onto the bit and completely integrated into the bit in the lower area. Individually tested protective insulation 1,000 V AC, VDE and GS tested.
- Application: For controlled fastening on live parts up to 1 000 V AC.
- Extra: 100% safety from fastening with torque according to specification of manufacturer type-tested switching devices according to EN 60439-1. Effortless access to low-lying fastening elements. Arranged clearly in a high quality, rugged and durable bag.

Order-No.	Series		
36080	2872 T9		1
	2872	1xTorqueVario®-S VDE, model 1.0-5.0 Nm	
	2879	1xslimTorque VDE bit holder for 6 mm slimBits	
	285-900	1xTorque-Setter	
	⓪ 2831-10	1x4.0	1x5.5
	⊕ 2831-11	1xPH1	1xPH2
	⊕ 2831-12	1xPZ1	1xPZ2

slimTorque starter set.



1000 V
IEC 60900:2012

2872 T18

slimTorque starter set, 18-pcs.

Torque value can be set via window scale.

With slimTorque VDE bit holder for 6 mm slimBits.

- Handle: VDE torque handle 1.0 - 5.0 Nm, steplessly adjustable with Torque Setter adjusting tool (included in delivery).
- Bit holder: Insulated metal ClicFix bit holder locks all slimBits reliability. Only for 6 mm slimBits.
- Bits: Protective insulation moulded directly onto the bit and completely integrated into the bit in the lower area. Individually tested protective insulation 1,000 V AC, VDE and GS tested.
- Application: For controlled fastening on live parts up to 1 000 V AC.
- Extra: 100% safety from fastening with torque according to specification of manufacturer type-tested switching devices according to EN 60439-1. Effortless access to low-lying fastening elements. Arranged clearly in a high quality, rugged and durable bag.

Order-No.	Series				
36791	2872 T18				1
	2872	1xTorqueVario®-S VDE, model 1.0-5.0 Nm			
	2879	1xslimTorque VDE bit holder for 6 mm slimBits			
	285-900	1xTorque-Setter			
	⓪ 2831-10	1x3.0	2x4.0	2x5.5	1x6.5
	⊕ 2831-12	1xPZ1	2xPZ2		
	⊕ 2831-14	1xSL/PZ1	1xSL/PZ2		
	⊕ 2831-15	1xT10	1xT15	1xT20	1xT25

