

Datasheet

5 ½ Digit Dual Measurement Multimeter

Stock No. : Model :
 123-3537 **IDM-8351**



FEATURES

- 120,000 Counts, VFD Display
- Dual Measurement/Dual Display
- The Basic Precision of DC Voltage : 0.012%
- Selectable Measurement Speeds, the Mmaximum : 320 Readings/s
- True RMS (AC, AC+DC) Measurements
- Auto/Manual Selection
- 12 Different Measurement Functions :
 AC/DC Voltage, AC/DC Current, AC+DC Voltage/Current, 2W/4W Resistance, Continuity Beeper, Diode Test, Capacitance, Frequency, Temperature
- Many Auxiliary Functions :
 Max./Min., REL/REL#, Compare, Hold, dB, dBm, Math(MX+B, %, 1/X)
- Digital I/O Provides Dual Mode (Standard Compare and User Definition Modes)
- Standard RS-232C and USB Device Interface (Support USBCDC and USBTMC Modes)

ISO-TECH presents the brand new 5 1/2 Digit Dual Measurement Multimeter-IDM-8351 to replace IDM-8251A of the same category. IDM-8351 features VFD dual-display, maximum 120,000 counts, 0.012% basic DC voltage accuracy and USB/RS232C connectors to provide users with measurement precision, lucid data observation, and the convenient connection with the personal computer. In addition to the fundamental measurement items such as AC/DC voltage, AC/DC current, AC+DC voltage/current, 2W/4W resistance, frequency, temperature measurement, continuity beeper and diode test, IDM-8351 also equips with the capacitance measurement function. Furthermore, the IDM-8351 also provides many auxiliary functions, including maximum/minimum values, dB, dBm, compare, reading hold, algorithms (MX+B, 1/X, %) etc. to meet the measurement requirements for manufacturing process tests, educational experiments and testing facilities. For the external control, the pin of digital I/O interface not only provides the signal output frequently used by the compare function, but also allows users to define signal output for each pin. Under the self-definition mode, users can apply the I/O as a simple digital hardware. The external control requirement can be achieved by signals from each pin so as to help users reduce trouble of making hardware. With respect to remote control and retrieving data, IDM-8351, taking consideration of users' habitual practice and universal system interface, provides standard RS-232C and USB interface to edit control programs and read measurement results. It is worth noting that for utilizing the USB interface, users have options of selecting either USBDC or USBTMC mode. While USBTMC is selected, users are able to control instrument with the USB interface exactly the same as controlling instrument with the GPIB interface; therefore, the relatively expensive GPIB connection cable is no longer required.

SELECTABLE MEASUREMENT SPEEDS



Displayed digits will not be decreased because of selecting different speeds

IDM-8351 has fastest measurement speed among the same category products and three selectable measurement speeds are available-slow/medium/fast. For instance, the DC voltage measurement can reach 320 readings per second on the fast mode, which can maximize the effectiveness of each measurement.

VARIOUS MEASUREMENT ITEMS AND FUNCTIONALITIES



IDM-8351 provides various measurement items and functionalities compared with that of the products of same category. There are twelve major measurement items of IDM-8351, including AC voltage/current, DC voltage/current, AC+DC voltage/current, two-wired and four-wired resistance, temperature, frequency, diode and continuity beeper test, and even the capability of measuring capacitance. Many auxiliary functions, such as maximum/minimum values, reading hold, relative values, dB, dBm, algorithms (MX+B, 1/X, %) and compare, are designed to reinforce the major measurement items to satisfy users' daily working requirements.


CONVNEIENT DIGITAL I/O FUNCTION



H.F	L.F	PASS	EOM	TRIG	
SET1	SET2	SET3	SET4	IN	GND

Another difference, while comparing with IDM-8251A, is that the Digital I/O of IDM-8351 provides two different modes which are general and self-definition. With the general mode, Digital I/O will output Hi Fail, Lo Fail, Pass and EOM (measurement results) based upon the results of the compare function and, furthermore, external trigger input is also provided. Under the self-definition mode, users can define output conditions for four pins (SET1~SET4) to execute the external control.

FREE SOFTWARE-REMOTE CONTROL AND DATA RETRIEVING

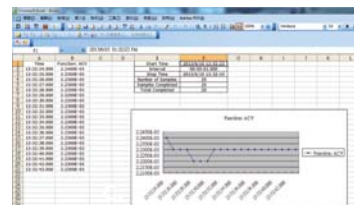

IDM-8351 provides free software-Excel ADDins for users' easy access. After installing the software, Microsoft Excel will establish Marco for users to directly control the setting of IDM-8351 to record the results of the measurements. The recorded data will be synchronously transformed into graphic displays via Excel drawing function that not only eliminates the cost and time of developing programs but also overcomes the compatibility issue of different programming languages.

SPECIFICATIONS (*1)

Range(*2)	Resolution	Test Current or Etc.	Accuracy(*3) 1 Year(23°C±5°C)
DC VOLTAGE			
100.000mV	1µV	10MΩ or >10GΩ	0.012 + 8
1.00000V	10µV	10MΩ or >10GΩ	0.012 + 5
10.0000V	100µV	11.1MΩ	0.012 + 5
100.000V	1mV	10.1MΩ	0.012 + 5
1000.00V	10mV	10MΩ	0.012 + 5
RESISTANCE			
100.000Ω	1mΩ	1mA	0.05 + 8
1.00000kΩ	10mΩ	1mA	0.05 + 5
10.0000kΩ	100mΩ	100µA	0.05 + 5
100.000kΩ	1Ω	10µA	0.05 + 5
1.00000MΩ	10Ω	1µA	0.05 + 5
10.0000MΩ	100Ω	0.5µA	0.30 + 5
100.000MΩ	1kΩ	0.5µA//10MΩ	3.00 + 8
DC CURRENT			
10.0000mA	100nA	1.1Ω	0.05 + 15
100.000mA	1µA	1.1Ω	0.05 + 5
1.00000A	10µA	0.1Ω	0.20 + 5
10.0000A	100µA	0.01Ω	0.20 + 5
CONTINUITY			
1000.00Ω	10mΩ	1mA	0.05 + 5
DIODE TEST			
6.0000V	100µV	1mA@6V	0.05 + 15
CAPACITANCE			
10.00nF	0.01nF	10µA	2.0 + 10
100.0nF	0.1nF	10µA	2.0 + 4
1.000µF	0.001µF	100µA	2.0 + 4
10.00µF	0.01µF	1mA	2.0 + 4
100.0µF	0.1µF	1mA	2.0 + 4

GENERAL

Display	VFD, Two Colors Display
Interface	RS-232C, USB device (USBCDC & USBTMC)
Power Source	AC 100 V / 120 V / 220 V / 240 V ±10%, 50-60Hz; Power Consumption Max. 15VA
Dimensions & Weight	265(W) x 107(H) x 302(D) mm, approx. 2.9kg

Range(*3)	Resolution	Frequency or Etc.	Accuracy 1 Year (23°C±5°C)
True RMS AC (or AC+DC – AC Coupled) Voltage			
100.000mV	1µV	20Hz ~ 45Hz 45Hz ~ 10kHz 10kHz ~ 30kHz 30kHz ~ 100kHz	1.0 + 100 0.3 + 100 1.5 + 300 5.0 + 300
1.00000V	10µV	20Hz ~ 45Hz 45Hz ~ 10kHz 10kHz ~ 30kHz 30kHz ~ 100kHz	1.0 + 100 0.2 + 100 1.0 + 100 3.0 + 200
10.0000V	100µV	20Hz ~ 45Hz 45Hz ~ 10kHz 10kHz ~ 30kHz 30kHz ~ 100kHz	1.0 + 100 0.2 + 100 1.0 + 100 3.0 + 200
100.000V	1mV	20Hz ~ 45Hz 45Hz ~ 10kHz 10kHz ~ 30kHz 30kHz ~ 100kHz	1.0 + 100 0.2 + 100 1.0 + 100 3.0 + 200
750.00V	10mV	20Hz ~ 45Hz 45Hz ~ 10kHz 10kHz ~ 30kHz 30kHz ~ 100kHz	1.0 + 100 0.2 + 100 1.0 + 100 3.0 + 200
True RMS AC (or AC+DC – AC Coupled) Current			
10.0000mA	100nA	20Hz ~ 45Hz 45Hz ~ 2kHz 2kHz ~ 10kHz	1.5 + 100 0.5 + 100 2.0 + 200
100.000mA	1µA	20Hz ~ 45Hz 45Hz ~ 2kHz 2kHz ~ 10kHz	1.5 + 100 0.5 + 100 2.0 + 200
1.00000A	10µA	20Hz ~ 45Hz 45Hz ~ 2kHz 2kHz ~ 10kHz	1.5 + 100 0.5 + 100 2.0 + 200
10.0000A	100µA	20Hz ~ 45Hz 45Hz ~ 2kHz 2kHz ~ 10kHz	1.5 + 100 1.0 + 100
FREQUENCY			
(Voltage)10Hz~1MHz	0.01 + 3
(Current)20Hz~10kHz	0.01 + 3
TEMPERATURE (Thermocouple)			
-200°C ~ 0°C	0.01 °C	J / T / K	0.4 °C(typical)
0°C ~ +300°C	0.01 °C	J / T / K	0.2 °C(typical)

Specifications subject to change without notice.

Note:

1. All specifications are applicable to the main (1st) display only and warmed up for at least 30 minutes and operated in the slow rate.
2. 20% overrange on all ranges, except 750V/10A range
3. Accuracy: ± (% of Reading + Digits)

ORDERING INFORMATION

IDM-8351	5 ½ Digit Dual Measurement Multimeter
ACCESSORIES	
Safety Instruction Sheet x 1, Power cord x 1, Test lead GTL-207A x 1	

OPTIONAL ASSESSORIES

GTL-108A	4Wire Test Lead (Kelvin Clip), Approx. 1100mm
GTL-205	Temperature probe adaptor with thermocouple (K-type), Approx. 1000mm
GTL-232	RS-232C Cable, 9-pin female to 9-pin, null modem for computer, Approx. 2000mm
GTL-246	USB Cable, A-B type, Approx. 1200mm
GRA-422	Rack Adapter Panel (19" 2U)