SIEMENS

Data sheet

3RM1201-1AA04



Reversing starter, 3RM1, 500 V, 0 - 0.12 kW, 0.1 - 0.5 A, 24 V DC, screw terminals

product brand name	SIRIUS		
product category	Motor starter		
product designation	Reversing starter		
design of the product	with electronic overload protection		
product type designation	3RM1		
General technical data			
trip class	CLASS 10A		
equipment variant according to IEC 60947-4-2	3		
product function	Reversing starter		
 intrinsic device protection 	Yes		
 for power supply reverse polarity protection 	No		
suitability for operation device connector 3ZY12	Yes		
insulation voltage rated value	500 V		
overvoltage category	III		
surge voltage resistance rated value	6 kV		
maximum permissible voltage for safe isolation			
 between main and auxiliary circuit 	500 V		
 between control and auxiliary circuit 	250 V		
shock resistance	6g / 11 ms		
vibration resistance	1 6 Hz, 15 mm; 20 m/s², 500 Hz		
operating frequency maximum	1 1/s		
mechanical service life (switching cycles) typical	30 000 000		
reference code according to IEC 81346-2	Q		
Substance Prohibitance (Date)	03/01/2017		
product function			
direct start	No		
reverse starting	Yes		
product function short circuit protection	No		
Electromagnetic compatibility			
EMC emitted interference according to IEC 60947-1	class A		
EMC immunity according to IEC 60947-1	Class A		
conducted interference			
 due to burst according to IEC 61000-4-4 	3 kV / 5 kHz		
 due to conductor-earth surge according to IEC 61000-4-5 	2 kV		
 due to conductor-conductor surge according to IEC 61000-4-5 	1 kV		
 due to high-frequency radiation according to IEC 61000-4-6 	10 V		
field-based interference according to IEC 61000-4-3	10 V/m		

	_			
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharge / 8 kV air discharge			
conducted HF interference emissions according to CISPR11	Class B for the domestic, business and commercial environments			
field-bound HF interference emission according to CISPR11	Class B for the domestic, business and commercial environments			
Safety related data				
protection class IP on the front according to IEC 60529	IP20			
touch protection on the front according to IEC 60529	finger-safe			
Main circuit				
number of poles for main current circuit	3			
design of the switching contact	Hybrid			
design of the switching contact as NO contact for signaling function	OUT, electronic, 24 V DC, 15 mA			
adjustable current response value current of the current-dependent overload release	0.1 0.5 A			
minimum load [%]	20 %; from set rated current			
type of the motor protection	solid-state			
operating voltage rated value	48 500 V			
relative symmetrical tolerance of the operating voltage	10 %			
operating frequency 1 rated value	50 Hz			
operating frequency 2 rated value	60 Hz			
relative symmetrical tolerance of the operating frequency	10 %			
operational current				
• at AC at 400 V rated value	0.5 A			
 at AC-3 at 400 V rated value 	0.5 A			
 at AC-53a at 400 V at ambient temperature 40 °C 	0.5 A			
rated value				
ampacity when starting maximum	4 A			
operating power for 3-phase motors at 400 V at 50 Hz	0 0.12 kW			
Inputs/ Outputs				
input voltage at digital input				
input voltage at digital input • at DC rated value	24 V			
input voltage at digital input • at DC rated value • with signal <0> at DC	0 5 V			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC				
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input	0 5 V 15 30			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC	0 5 V 15 30 11 mA			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC	0 5 V 15 30 11 mA 1 mA			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts	0 5 V 15 30 11 mA 1 mA 1			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum	0 5 V 15 30 11 mA 1 mA 1 3 A			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum	0 5 V 15 30 11 mA 1 mA 1			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control	0 5 V 15 30 11 mA 1 mA 1 3 A 1 A			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage	0 5 V 15 30 11 mA 1 mA 1 3 A 1 A DC			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value	0 5 V 15 30 11 mA 1 mA 1 3 A 1 A DC 19.2 30 V			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC	0 5 V 15 30 11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 %			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC	0 5 V 15 30 11 mA 1 mA 1 a 3 A 1 A DC 19.2 30 V 20 % 25 %			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value	0 5 V 15 30 11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 %			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value operating range factor control supply voltage rated value at DC	0 5 V 15 30 11 mA 1 mA 1 a 3 A 1 A DC 19.2 30 V 20 % 25 % 24 V			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value operating range factor control supply voltage rated	0 5 V 15 30 11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 % 25 % 24 V 0.8			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value operating range factor control supply voltage rated value at DC • initial value • full-scale value	0 5 V 15 30 11 mA 1 mA 1 a 3 A 1 A DC 19.2 30 V 20 % 25 % 24 V			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value operating range factor control supply voltage rated value at DC • initial value • full-scale value control current at DC	0 5 V 15 30 11 mA 1 mA 1 mA 1 A DC 19.2 30 V 20 % 25 % 24 V 0.8 1.25			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value operating range factor control supply voltage rated value at DC • initial value • full-scale value control current at DC • in standby mode of operation	0 5 V 15 30 11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 % 25 % 24 V 0.8 1.25 25 mA			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value operating range factor control supply voltage rated value at DC • initial value • full-scale value control current at DC • in standby mode of operation • when switching on	0 5 V 15 30 11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 % 25 % 24 V 0.8 1.25 25 mA 150 mA			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value operating range factor control supply voltage rated value at DC • initial value • full-scale value control current at DC • in standby mode of operation • when switching on • during operation	0 5 V 15 30 11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 % 25 % 24 V 0.8 1.25 25 mA 150 mA 70 mA			
input voltage at digital input • at DC rated value • with signal <0> at DC • for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value operating range factor control supply voltage rated value at DC • initial value • full-scale value control current at DC • in standby mode of operation • when switching on	0 5 V 15 30 11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 % 25 % 24 V 0.8 1.25 25 mA 150 mA			

• in switching state OFF			
 in switching state OFF — with bypass circuit 	0.6 W		
in switching state ON	0.0 11		
— with bypass circuit	1.68 W		
Response times	1.00 11		
ON-delay time	60 90 ms		
OFF-delay time	60 90 ms		
Power Electronics	00 00 m3		
operational current			
at 40 °C rated value	0.5 A		
• at 50 °C rated value	0.5 A		
• at 55 °C rated value	0.5 A		
• at 60 °C rated value	0.5 A		
Installation/ mounting/ dimensions			
mounting position	vertical, horizontal, standing (observe derating)		
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail		
height	100 mm		
width	22.5 mm		
depth	141.6 mm		
required spacing			
with side-by-side mounting			
— forwards	0 mm		
— backwards	0 mm		
— upwards	50 mm		
— downwards	50 mm		
— at the side	0 mm		
 for grounded parts 			
— forwards	0 mm		
— backwards	0 mm		
— upwards	50 mm		
— at the side	3.5 mm		
— downwards	50 mm		
Ambient conditions			
installation altitude at height above sea level maximum	4 000 m; For derating see manual		
ambient temperature			
 during operation 	-25 +60 °C		
 during storage 	-40 +70 °C		
during transport	-40 +70 °C		
environmental category during operation according to IEC 60721	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6		
relative humidity during operation	10 95 %		
air pressure according to SN 31205	900 1 060 hPa		
Communication/ Protocol			
protocol is supported			
PROFINET IO protocol	No		
PROFIsafe protocol	No		
product function bus communication	No		
	N -		
protocol is supported AS-Interface protocol	No		
Connections/ Terminals			
Connections/ Terminals type of electrical connection	screw-type terminals for main circuit, screw-type terminals for control circuit		
Connections/ Terminals type of electrical connection • for main current circuit	screw-type terminals for main circuit, screw-type terminals for control circuit screw-type terminals		
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit	screw-type terminals for main circuit, screw-type terminals for control circuit screw-type terminals screw-type terminals		
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit wire length for motor unshielded maximum	screw-type terminals for main circuit, screw-type terminals for control circuit screw-type terminals		
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit wire length for motor unshielded maximum type of connectable conductor cross-sections	screw-type terminals for main circuit, screw-type terminals for control circuit screw-type terminals screw-type terminals		
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit wire length for motor unshielded maximum type of connectable conductor cross-sections • for main contacts	screw-type terminals for main circuit, screw-type terminals for control circuit screw-type terminals screw-type terminals 100 m		
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit wire length for motor unshielded maximum type of connectable conductor cross-sections • for main contacts — solid	screw-type terminals for main circuit, screw-type terminals for control circuit screw-type terminals screw-type terminals 100 m 1x (0,5 4 mm ²), 2x (0,5 2,5 mm ²)		
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit wire length for motor unshielded maximum type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing	screw-type terminals for main circuit, screw-type terminals for control circuit screw-type terminals screw-type terminals 100 m 1x (0,5 4 mm ²), 2x (0,5 2,5 mm ²) 1x (0,5 4 mm ²), 2x (0,5 1,5 mm ²)		
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit wire length for motor unshielded maximum type of connectable conductor cross-sections • for main contacts — solid	screw-type terminals for main circuit, screw-type terminals for control circuit screw-type terminals screw-type terminals 100 m 1x (0,5 4 mm ²), 2x (0,5 2,5 mm ²)		

contacts					
 solid or strande 	ed		0.5 4 mm²		
 finely stranded 	 finely stranded with core end processing 				
connectable conduc contacts	ctor cross-section for	auxiliary			
 solid or stranded 		0.5 2.5 mm²			
 finely stranded with core end processing 		0.5 2.5 mm²			
type of connectable	conductor cross-sect	tions			
for auxiliary contacts					
— solid		1x (0,5 2,5 mm²)	, 2x (1,0 1,5 mm²)		
— finely stranded with core end processing		1x (0.5 2.5 mm²)	, 2x (0.5 1 mm²)		
 at AWG cables 	for auxiliary contacts		1x (20 14), 2x (1	8 16)	
AWG number as coded connectable conductor cross section					
for main contacts		20 12			
 for auxiliary cor 	ntacts		20 14		
UL/CSA ratings					
operating voltage at	AC	-			
according to UL rated value		480 V			
according to CSA rated value		400 V			
Certificates/ approval	s				
General Product Ap	oproval				EMC
		Confirmatio	-		•
SE	$\mathbf{\tilde{w}}$	<u>Confirmatio</u>	" (ኪ) FAC	<u> A</u>
CSA	ccc		UL	LIIL	RCM
Declaration of Conformity	Test Certificates	other	Railway		
CE	<u>Type Test Certific-</u> ates/Test Report	Confirmatic	on <u>Special Test</u>	<u>Certific-</u>	

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)


https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1201-1AA04


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RM1201-1AA04

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RM1201-1AA04

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RM1201-1AA04&lang=en

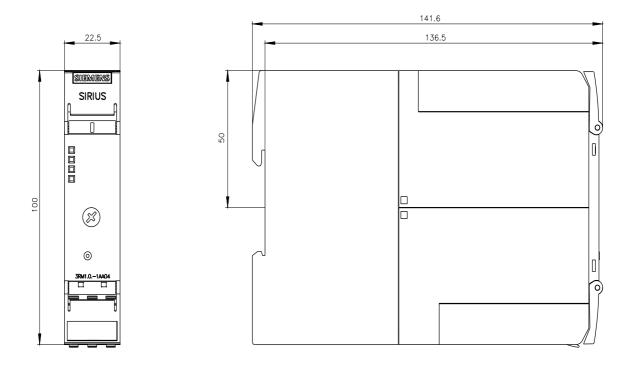

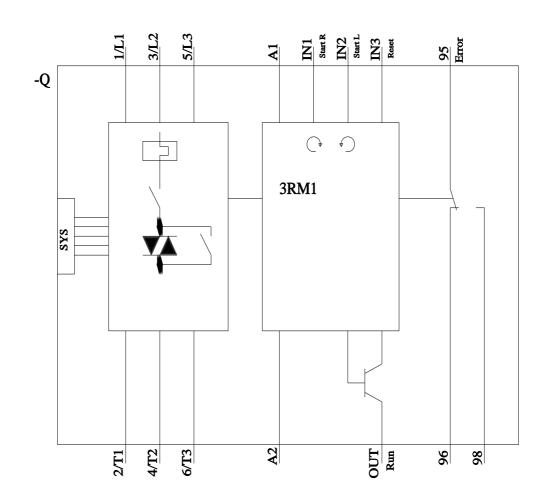

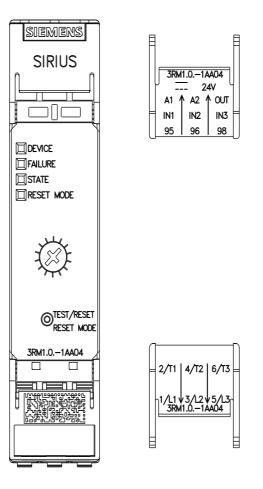

last modified:

11/3/2021 🖸