SIEMENS

Industry Automation and Drive Technologies Service & Support

3RB3016-1PB0 OVERLOAD RELAY 1...4 A

Technical / CAx data

Technical Data ○ CAx data

As of 2012-01-30



OVERLOAD RELAY 1...4 A FOR MOTOR PROTECTION SIZE S00, CLASS 10 CONTACTOR ASS. MAIN CIRCUIT: SCREW CONN. AUX.CIRCUIT: SCREW CONN. MANUAL-AUTOM.-RESET

General technical data:		
product brand name		SIRIUS
product designation		solid-state overload relay
Protection class IP / on the front		IP20
Insulation voltage / with degree of pollution 3 / rated value	V	690
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature		
 during storage 	C	-40+80
during transport	${\mathbb C}$	-40+80
during operating	C	-25+60
Relative humidity		
 during operating phase 	/ %	95
EMC immunity to interference		
 according to IEC 60947-1 		corresponds to degree of severity 3
EMC emitted interference		
 according to IEC 60947-1 		CISPR 11, environment B (residential area)
Conductor-bound parasitic coupling BURST		
according to IEC 61000-4-4		2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3
Conductor-bound parasitic coupling conductor-earth SURGE		
according to IEC 61000-4-5		2 kV (line to earth) corresponds to degree of severity 3
Conductor-bound parasitic coupling conductor- conductor SURGE		
according to IEC 61000-4-5		1 kV (line to line) corresponds to degree of


Page 1 of 5 3/29/2012 3:03:34 PM

		severity 3
Electrostatic discharge		severity 3
according to IEC 61000-4-2		6 kV contact discharge / 8 kV air discharge
Field-bound parasitic coupling		
according to IEC 61000-4-3		10 V/m
Resistance against shock		15g / 11 ms
Impulse voltage resistance / rated value	kV	6
Active power loss / total / typical	W	0.05
Item designation		_ 0.00
 according to DIN 40719 extendable after 		F
IEC 204-2 / according to IEC 750		
 according to DIN EN 61346-2 		F
Size of overload relay		S00
Size of the contactor / can be combined / company-		S00
specific		300
type of protection		PTB 09 ATEX 3001 Ex II (2) GD
Type of assignement		2
Trip class		CLASS 10
Main circuit:		
Number of poles / for main current circuit		3
Operating voltage / at AC-3 / rated value		
maximum	V	690
Operating current / at AC-3 / at 400 V		
rated value	Α	4
Adjustable response current		
 of the current-dependent overload release 	Α	14
Service power / for three-phase servomotors / at 400 V / at		
50 Hz		
 for AC three-phase 	kW	0.551.5
·		
Operating current / of the fuse link		
Operating current / of the fuse link ■ rated value	А	20
rated value	Α	20
rated value Auxiliary circuit:	A	
rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts	A	acceptability for PLC control (17 V, 5 mA)
rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts	A	acceptability for PLC control (17 V, 5 mA)
rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts	A	acceptability for PLC control (17 V, 5 mA) 1
rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts	A	acceptability for PLC control (17 V, 5 mA)
rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts	A	acceptability for PLC control (17 V, 5 mA) 1
rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15		acceptability for PLC control (17 V, 5 mA) 1
rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15 at 24 V	A	acceptability for PLC control (17 V, 5 mA) 1 0
rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15 at 24 V at 110 V	A A	acceptability for PLC control (17 V, 5 mA) 1 0
rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15 at 24 V at 110 V at 120 V	A A A	acceptability for PLC control (17 V, 5 mA) 1 0 4 4
rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15 at 24 V at 110 V at 120 V at 125 V	A A A	acceptability for PLC control (17 V, 5 mA) 1 0 4 4 4
rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15 at 24 V at 110 V at 120 V at 125 V at 230 V	A A A	acceptability for PLC control (17 V, 5 mA) 1 0 4 4
 rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15 at 24 V at 110 V at 120 V at 125 V at 230 V at DC-13 	A A A	acceptability for PLC control (17 V, 5 mA) 1 0 4 4 4
rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15 at 24 V at 110 V at 120 V at 125 V at 230 V	A A A	acceptability for PLC control (17 V, 5 mA) 1 0 4 4 4
 rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15 at 24 V at 110 V at 120 V at 125 V at 230 V at DC-13 	A A A A	acceptability for PLC control (17 V, 5 mA) 1 1 0 4 4 4 4 3
rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15 at 24 V at 110 V at 120 V at 125 V at 230 V at DC-13 at 24 V at 60 V	A A A A	acceptability for PLC control (17 V, 5 mA) 1 0 4 4 4 3
 rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15 at 24 V at 110 V at 125 V at 230 V at DC-13 at 24 V at 60 V at 110 V 	A A A A	acceptability for PLC control (17 V, 5 mA) 1 1 0 4 4 4 3 2 1 0.3
 rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15 at 24 V at 110 V at 120 V at 125 V at 230 V at DC-13 at 24 V at 60 V at 110 V at 125 V 	A A A A A A	acceptability for PLC control (17 V, 5 mA) 1 1 0 4 4 4 4 1 0 3 2 1 0.3 0.3
 rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15 at 24 V at 110 V at 125 V at 230 V at DC-13 at 24 V at 60 V at 110 V 	A A A A A	acceptability for PLC control (17 V, 5 mA) 1 1 0 4 4 4 3 2 1 0.3
 rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15 at 24 V at 110 V at 120 V at 125 V at 230 V at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V Short-circuit:	A A A A A A	acceptability for PLC control (17 V, 5 mA) 1 1 0 4 4 4 4 1 0 3 2 1 0.3 0.3 1
 rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15 at 24 V at 110 V at 120 V at 125 V at 230 V at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V 	A A A A A A	acceptability for PLC control (17 V, 5 mA) 1 1 0 4 4 4 4 1 0 3 2 1 0.3 0.3
 rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15 at 24 V at 110 V at 120 V at 230 V at DC-13 at 24 V at 60 V at 110 V at 220 V Short-circuit: Design of the fuse link / for short-circuit protection of the auxiliary switch / required 	A A A A A A	acceptability for PLC control (17 V, 5 mA) 1 1 0 4 4 4 4 1 0 3 2 1 0.3 0.3 1
 rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15 at 24 V at 110 V at 120 V at 230 V at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V Short-circuit: Design of the fuse link / for short-circuit protection of the	A A A A A A	acceptability for PLC control (17 V, 5 mA) 1 1 0 4 4 4 4 1 0 3 2 1 0.3 0.3 1
 rated value Auxiliary circuit: Contact reliability / of the auxiliary contacts Number of NC contacts / for auxiliary contacts Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts Operating current / of the auxiliary contacts at AC-15 at 24 V at 110 V at 120 V at 230 V at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V Short-circuit: Design of the fuse link / for short-circuit protection of the auxiliary switch / required Installation/mounting/dimensions:	A A A A A A	acceptability for PLC control (17 V, 5 mA) 1 1 0 4 4 4 4 3 2 1 0.3 0.3 1 fuse gL/gG: 6 A

Page 2 of 5 3/29/2012 3:03:34 PM

Width	mm	45
Height	mm	64.7
Depth	mm	72.5
Distance, to be maintained, to the ranks assembly		
forwards	mm	0
backwards	mm	0
upwards	mm	0
downwards	mm	0
sidewards	mm	0
Distance, to be maintained, to earthed part	_	
forwards	mm	0
backwards	mm	0
upwards	mm	0
downwards	mm	0
sidewards	mm	6
Distance, to be maintained, conductive elements	_	
forwards	mm	0
backwards	mm	0
upwards	mm	0
downwards	mm	0
sidewards	mm	6
Commontions		
Connections:		
Design of the electrical connection		

Connections:	
Design of the electrical connection	
 for main current circuit 	screw-type terminals
 for auxiliary and control current circuit 	screw-type terminals
Product function / removable terminal for auxiliary and control circuit	Yes
Type of the connectable conductor cross-section	
 for main contacts 	
• solid	1x (0.5 4 mm²), 2x (0.5 1.5 mm²), 2x (0.75 4 mm²)
stranded	1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²), 1x (0.75 4 mm²), 2x (0.75 4 mm²)
finely stranded	
 with conductor end processing 	1x (0.5 2.5 mm²), 2x (0.5 2.5 mm²)
 for AWG conductors / for main contacts 	1x (20 12), 2x (20 12)
 for auxiliary contacts 	
• solid	1x (0.5 4 mm²), 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
finely stranded	
 with conductor end processing 	1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²), 1x (0.5 2.5 mm²)
 for AWG conductors / for auxiliary contacts 	1x (20 14), 2x (20 14)

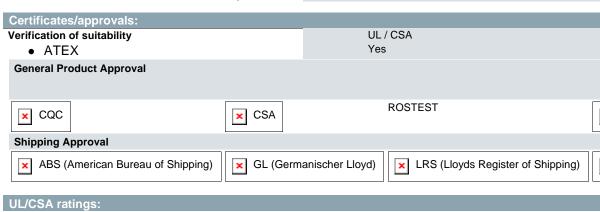

Page 3 of 5 3/29/2012 3:03:34 PM

Contact rating designation / for auxiliary contacts / according to UL

B600 / R300

Reliability figures:

Protection against electrical shock finger-safe

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)


http://www.siemens.com/industrial-controls/mall


Cax online generator:

http://www.siemens.com/cax


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RB3016-1PB0/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RB3016-1PB0

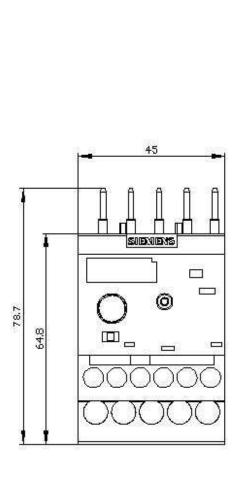

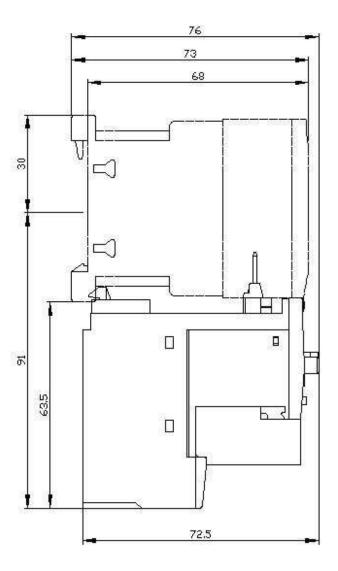

Page 4 of 5 3/29/2012 3:03:34 PM

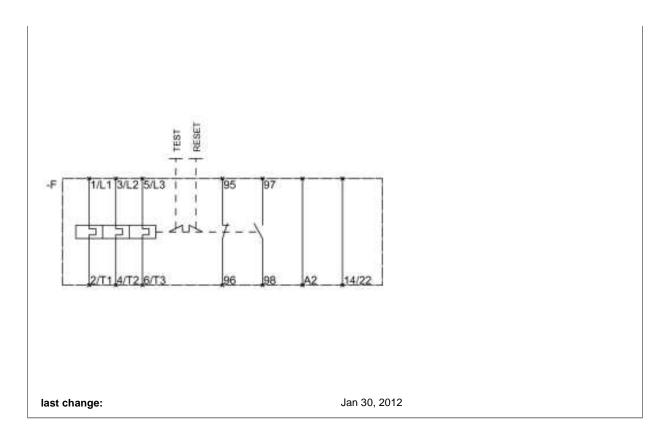

© Siemens AG 2012 - Corporate Information - Privacy Policy - Terms of Use

Page 5 of 5 3/29/2012 3:03:34 PM