

**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 Email: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex, CM20 2DY, UK  
 Phone: +44 1279 63 55 33  
 Fax: +44 1279 62 50 29  
 Email: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 6733 Myers Road  
 East Syracuse, NY 13057, USA  
 Phone: +1 315 437 5866  
 Fax: +1 315 437 5860  
 Email: info.us@jumo.net  
 Internet: www.jumousa.com



# JUMO safetyM STB/STW Ex Safety Temperature Limiter/Monitor According to DIN EN 14597 and ATEX Approval

## Brief description

The compact and user configurable JUMO safetyM STB/STW Ex can now also enable early and reliable detection of risks in Ex-areas which could potentially result in personal injuries, environmental damage, or destruction of the production plant and production materials. The devices are marked as follows:

### 1-sensor variant

II (1) (2) (3) G (b1) [Ex ia Ga] [e pz] IIC  
 II (1) (2) (3) D (b1) [Ex ia Da] [p Dc] IIIC

### 2-sensor variant


II (1) (1) (2) G (b2) [Ex ia Ga] [e py] IIC  
 II (1) (1) (2) D (b2) [Ex ia Da] [p Db] IIIC

The primary task of safety temperature limiters is to reliably monitor thermal processes and to switch plants to a safe operating status in the event of malfunctions. Along with the existing approvals according to DIN 14597, SIL 3, PL e (Performance Level), GL, the device also has approval according to ATEX and can therefore also be used for measurements in Ex areas. However, the device itself has to be installed outside the Ex area.

The inputs are intrinsically safe [Ex ia] so that relevant probes can be connected directly. Barriers are no longer required. The device is also certified according to DIN EN 50495 and DIN EN 13463-6 as an ignition source monitoring device (iPL 2) as specified in the ATEX directive and can be used to monitor potentially explosive atmospheres containing gas or dust. The device concept also meets the stringent requirements of DIN EN 61508 and DIN EN 13849. The 1oo2D structure ensures reliable detection of faults, meaning that the device concept can also be used for applications subject to the new Machinery Directive 2006/42/EC.

Along with the keypad, the clear and well-structured backlight display with plain text provides quick and straightforward configuration directly on the device. The clear menu structure ensures easy operation, which in turn shortens startup times. All safety relevant process values are displayed and the most important functions are shown by simple pictograms.

## Block diagram

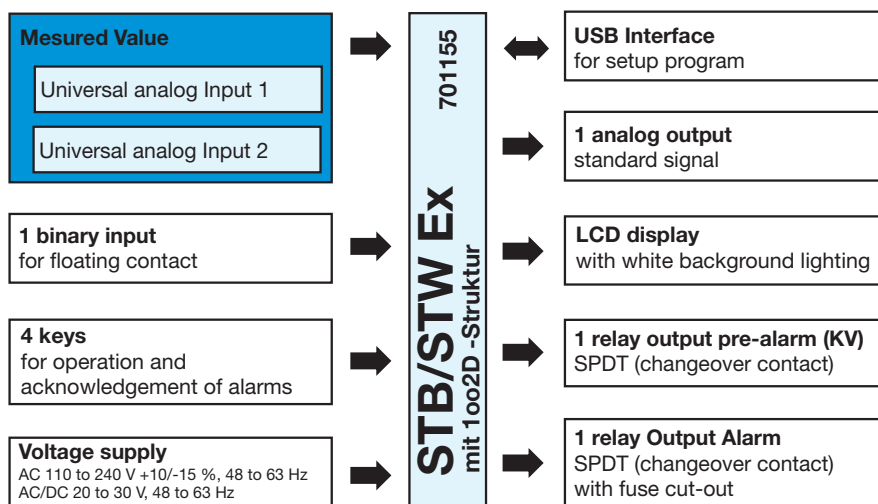

Type 701155/ ...044/059

Type 701155/ ...045/059

## Special features

- 1oo2D structure for a high degree of process reliability
- LCD display with backlight and plain text display for more simplified operation
- Setup program for configuration and archiving via USB interface
- Digital input filter with adjustable filter time constant
- Pre-alarm absolute or adjustable as a margin from the limit value
- Wide voltage supply range from AC 110 to 240 V +10 % / -15 % or AC/DC 20 to 30 V
- Can be configured as safety temperature limiter (STB) or safety temperature monitor (STW)
- 12 linearizations can be set
- Internal and external unlocking possible
- Approvals for DIN EN 14597, SIL, PL e (Performance Level e), DIN, ATEX, PED, and optionally DNVGL

## Approvals/approval marks (see "Technical data")



**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 Email: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex, CM20 2DY, UK  
 Phone: +44 1279 63 55 33  
 Fax: +44 1279 62 50 29  
 Email: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 6733 Myers Road  
 East Syracuse, NY 13057, USA  
 Phone: +1 315 437 5866  
 Fax: +1 315 437 5860  
 Email: info.us@jumo.net  
 Internet: www.jumousa.com



## Technical data

### Analog inputs

#### RTD temperature probe

Designation	Measuring range	Accuracy Two/three-wire circuit <sup>1</sup>	Ambient temperature influence
Pt100 DIN IEC 60751:2008	-200 to +850 °C	0.5 %/0.1 %	50 ppm/K
Pt1000 DIN IEC 60751:2008	-200 to +850 °C	0.5 %/0.1 %	50 ppm/K
Connection type	Maximum line resistance in two-wire circuit: 15 Ω; three-wire circuit: 30 Ω		
Sampling rate	210 ms		
Error tolerance time	≤ 5 s: time taken into account for all diagnostic tests		
Input filter	Digital filter, 2nd order; filter constant can be set from 0 to 100 s		
Special features	Individual probe Pt100 two-wire, display can also be programmed in °F		

#### Thermocouples

Designation	Measuring range	Accuracy <sup>1</sup>	Ambient temperature influence
Fe-CuNi "L" DIN 43710:1985-12	-200 to +900 °C	0.4 %	100 ppm/K
Fe-CuNi "J" DIN EN 60584-1:1996-10	-200 to +1200 °C	0.4 %	100 ppm/K
Cu-CuNi "U" DIN 43710:1985-12	-200 to +600 °C	0.4 %	100 ppm/K
Cu-CuNi "T" DIN EN 60584-1:1996-10	-200 to +400 °C	0.4 %	100 ppm/K
NiCr-Ni "K" DIN EN 60584-1:1996-10	-200 to +1372 °C	0.4 %	100 ppm/K
Pt10Rh-Pt "S" DIN EN 60584-1:1996-10	-50 to +1768 °C	0.4 %	100 ppm/K
Pt13Rh-Pt "R" DIN EN 60584-1:1996-10	-50 to +1768 °C	0.4 %	100 ppm/K
Pt30Rh-Pt6Rh "B" DIN EN 60584-1:1996-10	0 to 1820 °C	0.4 % <sup>2</sup>	100 ppm/K
NiCrSi-NiSi "N" DIN EN 60584-1:1996-10	-100 to 1300 °C	0.4 % <sup>2</sup>	100 ppm/K
W3Re-W25Re "D" ASTM E1751M-09 (up to 2315 °C): 2009	0 to 2495 °C	0.4 %	100 ppm/K
W5Re-W26Re "C" ASTM E230M-11: 2011	0 to 2315 °C	0.4 %	100 ppm/K
Cold junction	Pt100 internal		
Cold junction accuracy	±1 K		
Sampling rate	210 ms		
Error tolerance time	≤ 5 s: time taken into account for all diagnostic tests		
Input filter	Digital filter, 2nd order; filter constant can be set from 0 to 100 s		

1. The accuracy refers to the maximum measuring range.

#### Direct current

Measuring range	Accuracy	Ambient temperature influence
4 to 20 mA, voltage drop < 2 V	0.2 %	150 ppm/K
Scaling	Can be freely programmed within the limits	
Sampling rate	210 ms	
Error tolerance time	≤ 5 s: time taken into account for all diagnostic tests	
Input filter	Digital filter, 2nd order; filter constant can be set from 0 to 100 s	
Special features	Individual probe 4 to 20 mA	

### Analog output

	Signal type	Accuracy	Residual ripple	Load influence	Temperature influence	Load resistance
Current	4 to 20 mA	≤ 0.5 %	±0.5 % at 300 Ω	±0.05 mA/100 Ω	150 ppm/K	≤ 500 Ω
	0 to 20 mA					
Voltage	2 to 10 V	≤ 0.5 %	± 0.5 %	±15 mV	150 ppm/K	≥ 500 Ω
	0 to 10 V					

**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 Email: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex, CM20 2DY, UK  
 Phone: +44 1279 63 55 33  
 Fax: +44 1279 62 50 29  
 Email: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 6733 Myers Road  
 East Syracuse, NY 13057, USA  
 Phone: +1 315 437 5866  
 Fax: +1 315 437 5860  
 Email: info.us@jumo.net  
 Internet: www.jumousa.com



## Digital input

Connection	Function
1 potential-free contact	Unlocking, keyboard lock, level inhibit can be configured

## Relay outputs

Relay output KV	Relay (changeover contact) without contact protection 30000 switching operations at a switching capacity of AC 250 V, 3 A, 50 Hz (resistive load) or maximum DC 30 V, 3 A. Minimum current: DC 12 V, 100 mA
Alarm relay output	Relay (changeover contact) <b>Contact protection circuit:</b> fuse cut-out 3.15 AT, installed in the N/O contact arm 30000 switching operations at a switching capacity of AC 230 V, 3 A, 50 Hz (resistive load) or up to DC 30 V, 3 A. Minimum current: DC 12 V, 100 mA.

## Measuring circuit monitoring

	RTD temperature probe in three-wire circuit and double thermocouples	Thermocouples	Current 4 to 20 mA
Out of range	Is detected LED K1, K2, KD, and KV are lit; ">>>>" flashes in the display for overrange, "<<<<" for underrange.		
Probe/cable break	Is detected LED K1, K2, KD, and KV are lit; ">>>>" flashes in the display; alarm relay output is inactive		LED K1, K2, KD, and KV are lit; ">>>>" flashes in the display; alarm relay output is inactive
Probe short circuit	Is detected LED K1, K2, KD, and KV are lit "<<<<" flashes in the display; alarm relay output is inactive	Is detected by difference monitoring of the analog inputs	LED K1, K2, KD, and KV are lit; "<<<<" flashes in the display; alarm relay output is inactive

## Voltage supply

Voltage supply	AC/DC 20 to 30 V, 48 to 63 Hz	AC 110 to 240V, +10/-15 %, 48 to 63 Hz
Power consumption, power loss	Max. 12 W	Max. 12 W
Power consumption, power loss: For the following operating mode Analog output 10 mA; display backlight off; alarm relay output switched on; pre-alarm relay switched off; sensor: 2xPt100	5 W	5 W

## Test voltages according to EN 60730, Part 1

Input and output against voltage supply	
- With a voltage supply of AC 110 to 240 V +10 % /-15 %	3.7 kV/50 Hz
- With a voltage supply of AC/DC 20 to 30 V, 48 to 63 Hz	3.7 kV/50 Hz

## Electrical safety

	Clearances / creepage distances
Mains voltage to electronic components and probes	≥ 6 mm / ≥ 8 mm
Mains voltage to relays	≥ 6 mm / ≥ 8 mm
Relays to electronic components and probes	≥ 6 mm / ≥ 8 mm
Electrical safety	According to DIN EN 14597 (DIN EN 60730-2-9) Overvoltage category III, pollution degree 2
Protection rating I	With internal isolation from SELV electrical circuits

**JUMO GmbH & Co. KG**

Delivery address: Mackenrodtstraße 14  
36039 Fulda, Germany  
Postal address: 36035 Fulda, Germany  
Phone: +49 661 6003-0  
Fax: +49 661 6003-607  
Email: mail@jumo.net  
Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**

JUMO House  
Temple Bank, Riverway  
Harlow, Essex, CM20 2DY, UK  
Phone: +44 1279 63 55 33  
Fax: +44 1279 62 50 29  
Email: sales@jumo.co.uk  
Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**

6733 Myers Road  
East Syracuse, NY 13057, USA  
Phone: +1 315 437 5866  
Fax: +1 315 437 5860  
Email: info.us@jumo.net  
Internet: www.jumousa.com

**Environmental influences**

Ambient temperature range	0 to +55 °C
Storage temperature range	-30 to +70 °C
Temperature influence	$\leq \pm 0.005 \text{ %/K dev. from } 23 \text{ °C}^1$ for RTD temperature probes $\leq \pm 0.01 \text{ %/K dev. from } 23 \text{ °C}^1$ for thermocouple, current
Terminal temperature range	<p>If the temperature range between -10 °C and +80 °C is exceeded or not reached, the device displays the "Terminal temperature" error message.</p> <p>The output changes to a safe state (quiescent current principle). The message can only be acknowledged if the temperature has moved back into the valid range.</p>
Resistance to climatic conditions	85 % rel. humidity without condensation (3K3 with extended temperature range according to DIN EN 60721-3-3)
EMC	According to DIN EN 14597 and standards from the standards series DIN EN 61326
Interference emission	Class B
Interference immunity	Evaluation criteria FS according to DIN EN 14597, regulation and control devices (RS)

1. All specifications refer to the measuring range end value

**Housing**

Material	Polycarbonate
Flammability class	UL 94 V0
Electrical connection	On the front via screw terminals up to max. 2.5 mm <sup>2</sup>
Mounting	On 35 mm DIN rail according to DIN EN 60715
Installation position	Vertical
Weight	Approx. 230 g
Protection type	IP 20 according to DIN EN 60529

**Approvals/approval marks**

Approval mark	Test facility	Certificates/certification numbers	Inspection basis	Valid for
DIN	DIN CERTCO	STB/STW 1228	DIN EN 14597	All device versions
SIL2, SIL3	TÜV Nord (German Technical Inspection Agency)	SEBS-A.143631/14-2, V1.0	DIN EN 61508	All device versions
PL e			DIN EN ISO 13849	
DNV GL	DNV GL	TAA000017J		Only devices with extra code 062
Pressure Equipment Directive (PED)	TÜV Nord (German Technical Inspection Agency)	1045P0038/15/D0046	Pressure Equipment Directive 97/23/EC	All device versions
ATEX "i"	TÜV Nord (German Technical Inspection Agency)	TÜV 11 ATEX 556139 X	Directive 94/9/EC	Devices with <b>blue</b> terminals
IECEX "i"	TÜV Nord (German Technical Inspection Agency)	IECEX TUN 15.0036X	IEC 60079-0 IEC 60079-11	
ATEX "e" and "t"	Eurofins / Electrosuisse Product Testing	SEV 17 ATEX 0177 X	Directive 2014/34/EU	Devices with <b>black</b> terminals

**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 Email: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex, CM20 2DY, UK  
 Phone: +44 1279 63 55 33  
 Fax: +44 1279 62 50 29  
 Email: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 6733 Myers Road  
 East Syracuse, NY 13057, USA  
 Phone: +1 315 437 5866  
 Fax: +1 315 437 5860  
 Email: info.us@jumo.net  
 Internet: www.jumousa.com



## Display and control elements

Legend	Comment	
3	<b>LCD display</b> Black/white with background lighting, 96 x 64 pixels	
6	<b>LED KV (yellow)</b> Is lit if the pre-alarm is triggered	
7	<b>LED KD (yellow)</b> Is lit if the diagnostic processor has performed a switch-off	
8	<b>Keys</b> (can only be operated when the transparent hood is folded upward) Increase value,  Decrease value Programming RESET	
12	<b>Setup interface</b>	
13	<b>LED K2 (red)<sup>1</sup></b> Is always simultaneously lit with K1 when errors occur on analog input 1 or 2 or in the event of limit value exceedance	
14	<b>LED K1 (red)<sup>1</sup></b> Is always simultaneously lit with K2 when errors occur on analog input 1 or 2 or in the event of limit value exceedance	
15	<b>LED OK</b> Green: valid range Off: error occurred	

1. The limit value exceedance is indicated by the installed LEDs K1 and K2 (red) for each channel, and the safety-relevant relay output alarm (terminal 14 and 16) switches the system to a safe operating status (**alarm range**).


## Galvanic isolation

Test voltages:		
(1) Analog inputs		(2) Alarm relay output
(3) Digital input		(4) Pre-alarm relay output
(5) Setup interface		
(6) Display		
(7) Analog output		
(8) Voltage supply		






## Switching behavior of pre-alarm relay output


### Absolute value or distance from the direct limit value

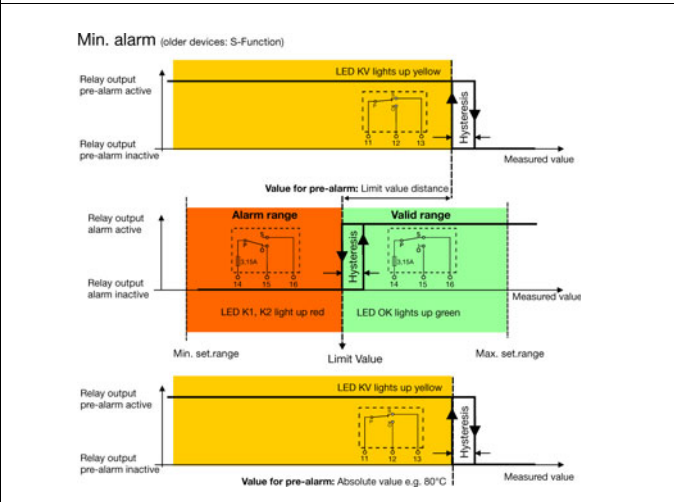


### Absolute value or distance from the inverse limit value

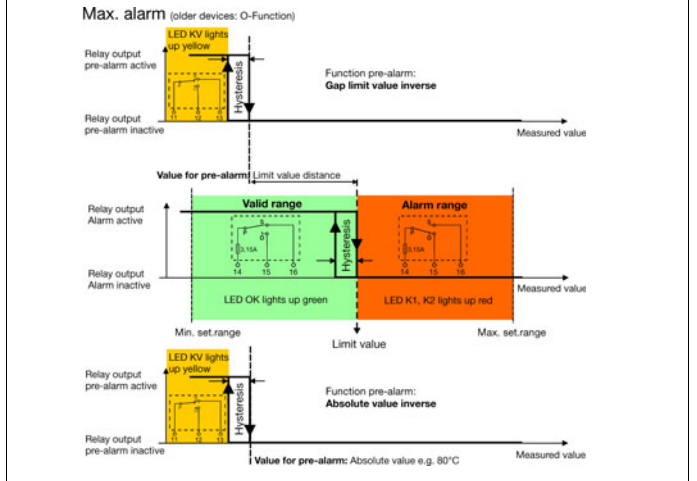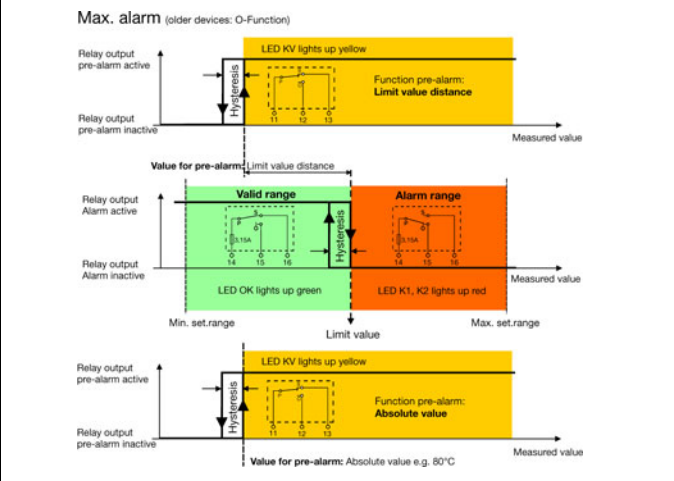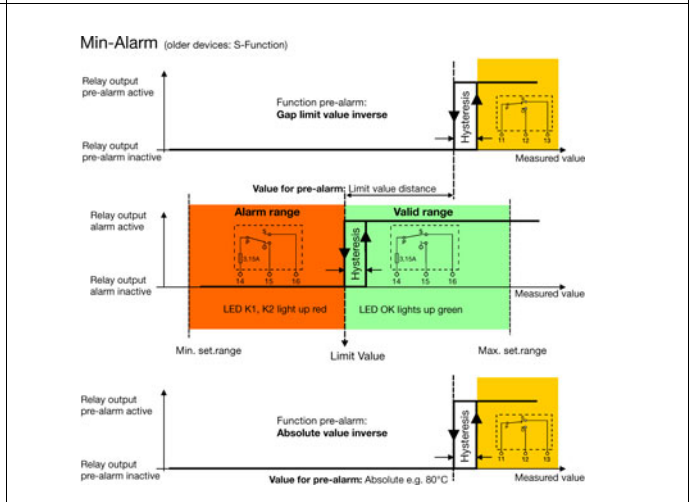

### Direct window (independent of the min. or max. alarm setting)

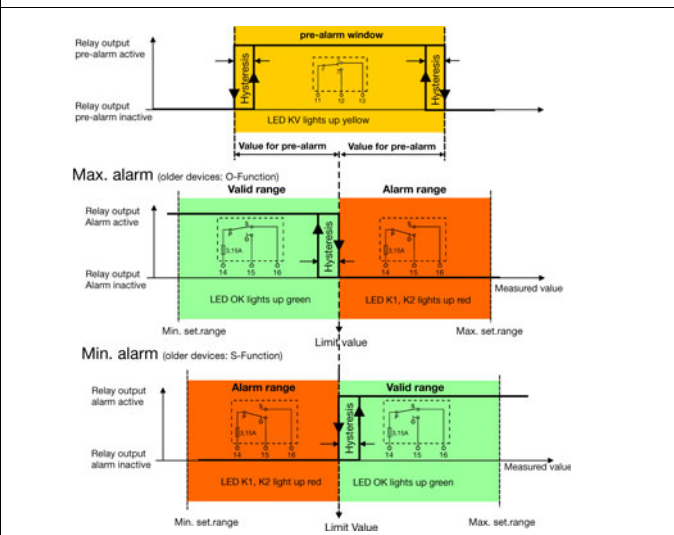


### Inverse window (independent of the min. or max. alarm setting)

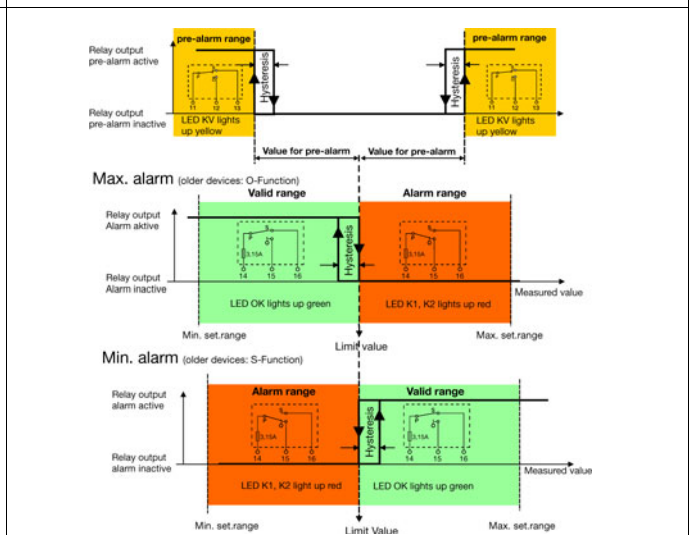




**Switching behavior of min. alarm**

**Min. alarm** (older devices: S-Function)

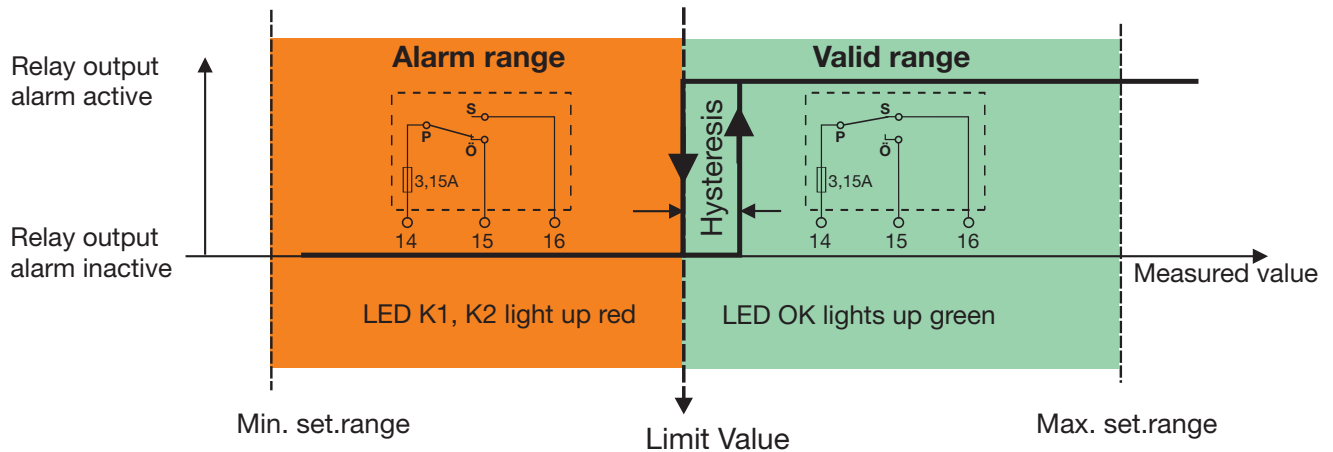

**Switching behavior of max. alarm (default setting)**


**Max. alarm** (older devices: O-Function)









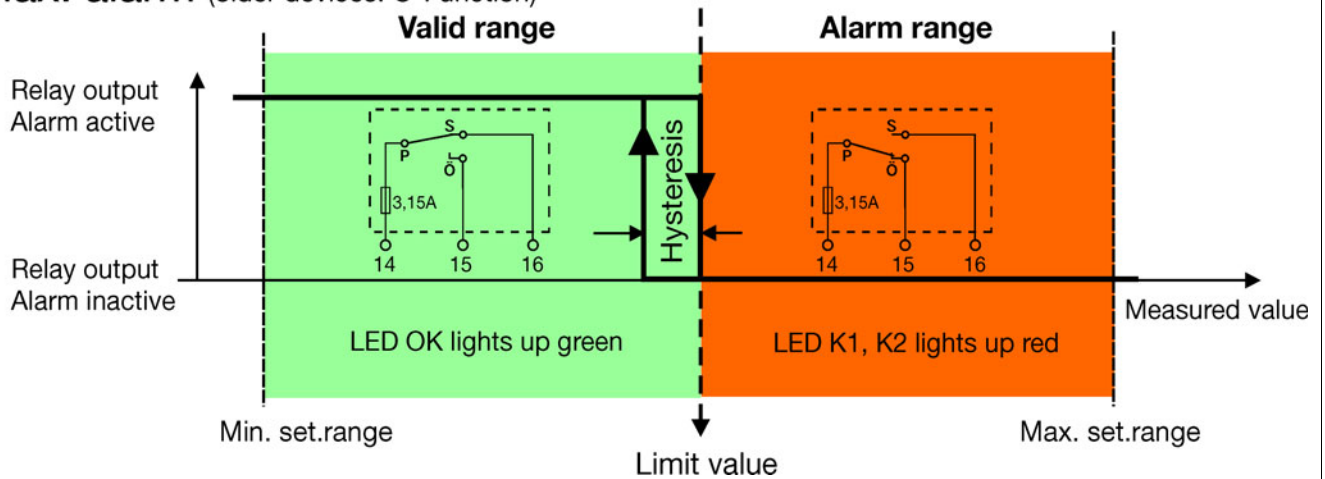




## Connection diagram

The connection diagram in the data sheet provides preliminary information about the connection options. For the electrical connection, only use the installation instructions or the operating manual. The knowledge and the correct technical execution of the safety information and warnings contained in these documents are mandatory for installation, electrical connection, startup, and for safety during operation.

<p>The connection is made via screw terminals.</p> <div style="border: 1px solid blue; background-color: #007bff; color: white; padding: 5px; display: inline-block;"> <b>Caution:</b>            The cover cap must be removed prior to wiring and put back on when finished. This is necessary for the proper operation of the probes in the Ex-area!         </div> 	<table border="1"> <thead> <tr> <th>Wire</th> <th>Admissible cross section</th> </tr> </thead> <tbody> <tr> <td>One-wire</td> <td>≤ 2.5 mm<sup>2</sup></td> </tr> <tr> <td>Fine-strand, with ferrule</td> <td>≤ 1.5 mm<sup>2</sup></td> </tr> </tbody> </table> <p>Tightening torque of the screws: max. 0.5 Nm</p>	Wire	Admissible cross section	One-wire	≤ 2.5 mm <sup>2</sup>	Fine-strand, with ferrule	≤ 1.5 mm <sup>2</sup>
	Wire	Admissible cross section					
One-wire	≤ 2.5 mm <sup>2</sup>						
Fine-strand, with ferrule	≤ 1.5 mm <sup>2</sup>						

Legend	Comment	Screw terminals	Screw terminals
1, 2		<b>Analog input 1 (E1)</b>	<b>Analog input 2 (E2)</b>
	Thermocouple / <b>Double thermocouple</b>		
	⚠ When connecting double thermocouples, the measuring circuits (E1) and (E2) must be isolated. That means that both thermocouples have no electrical connection to the protection fitting and furthermore no electrical connection to each other (isolated assembly).		
	<b>RTD temperature probe in two-wire circuit</b>		
	👉 Enter the line resistance for RTD temperature probes in two-wire circuit when using greater line lengths. Setup program: <i>edit =&gt; analog inputs</i>		
	<b>RTD temperature probe Pt100/Pt1000 in three-wire circuit</b>		
	RTD temperature probe Pt100 in two-wire circuit, single sensor for both analog inputs		
	<b>Caution:</b> When only one probe (SIL2) is connected, the temperature limiter device is reduced from <b>SIL3 to SIL2!</b> However, the internal 2-channel structure (1oo2D) in the device still remains. Both channels measure the same sensor due to the simplified external wiring.		
	<b>(4) to 20 mA</b>		



**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodstraße 14  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 Email: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex, CM20 2DY, UK  
 Phone: +44 1279 63 55 33  
 Fax: +44 1279 62 50 29  
 Email: sales@jumo.co.uk  
 Internet: www.jumo.co.uk


**JUMO Process Control, Inc.**  
 6733 Myers Road  
 East Syracuse, NY 13057, USA  
 Phone: +1 315 437 5866  
 Fax: +1 315 437 5860  
 Email: info.us@jumo.net  
 Internet: www.jumousa.com



Legend	Comment	Screw terminals	Screw terminals
	(4) to to 20 mA for both analog inputs  <b>Caution:</b> When only one probe (SIL2) is connected, the temperature limiter device is reduced from <b>SIL3 to SIL2!</b> However, the internal 2-channel structure (1oo2D) in the device still remains. Both channels measure the same current signal due to the simplified external wiring.		
4	<b>Digital input</b> Connection to a potential-free contact	Ground	
5	<b>Analog output:</b> 0 to 20 mA 4 to 20 mA (default setting) 0(2) ... 10 V		
9	<b>Voltage supply</b> According to nameplate	<b>AC:</b> L1 line conductor N neutral conductor 	<b>DC:</b> L- L+ (L+) L- (L-) L+ 
10	<b>Alarm relay output (zero-current state)</b> Relay (changeover contact) with fuse cut-out		
11	<b>Pre-alarm relay output (KV)</b> Relay (changeover contact)		

## Dimensions

Type 701155/...

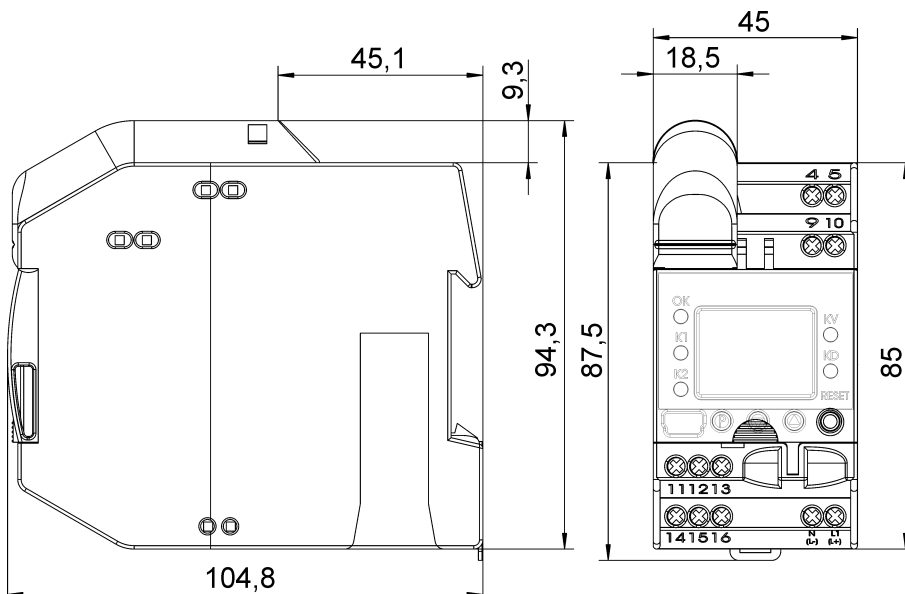

**JUMO GmbH & Co. KG**

Delivery address: Mackenrodtstraße 14  
36039 Fulda, Germany  
Postal address: 36035 Fulda, Germany  
Phone: +49 661 6003-0  
Fax: +49 661 6003-607  
Email: mail@jumo.net  
Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**

JUMO House  
Temple Bank, Riverway  
Harlow, Essex, CM20 2DY, UK  
Phone: +44 1279 63 55 33  
Fax: +44 1279 62 50 29  
Email: sales@jumo.co.uk  
Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**

6733 Myers Road  
East Syracuse, NY 13057, USA  
Phone: +1 315 437 5866  
Fax: +1 315 437 5860  
Email: info.us@jumo.net  
Internet: www.jumousa.com



## Important probe information in the following tables

The following should be noted:

There is no reliable galvanic isolation between the probe and housing. As a result, the sensor connections are to be considered grounded for the safety evaluation.

Among other things, EN 60079-0 requires for the EPL Ga that the mass fraction of aluminum must be less than 10 % for the manufacturing of metallic housings. The terminal head of the probes used by JUMO contains more than 10 % aluminum. The terminal head must therefore be secured by suitable impact protection for the use of EPL Ga (zone 0). The impact protection must securely prevent friction sparks, contact-breaking sparks, and impact sparks. Otherwise there is a risk of ignitable sparks. No other precautions have to be taken when used in EPL Gb (zone 1).

## DIN-approved probes for the operating medium air

**Note:** because of the high response accuracy, **the use of thermowells** (immersion sleeves) **is not admissible**.

Current type designation	Probe type	Temperature range	Nom. length mm	Process connection
<b>RTD temperature probe data sheet 902006</b>				
902006/65-228-1003-1-15-500-668/922	1 × Pt100	-170 to +700 °C	500	
902006/65-228-1003-1-15-710-668/922			710	
902006/65-228-1003-1-15-1000-668/922			1000	
902006/55-228-1003-1-15-500-254/922	1 × Pt100	-170 to +700 °C	500	
902006/55-228-1003-1-15-710-254/922			710	
902006/55-228-1003-1-15-1000-254/922			1000	
902006/65-228-2003-1-15-500-668/922	2 × Pt100	-170 to +700 °C	500	Stop flange displaceable
902006/65-228-2003-1-15-710-668/922			710	
902006/65-228-2003-1-15-1000-668/922			1000	
902006/55-228-2003-1-15-500-254/922	2 × Pt100	-170 to +700 °C	500	Displaceable screw connection G1/2
902006/55-228-2003-1-15-710-254/922			710	
902006/55-228-2003-1-15-1000-254/922			1000	
<b>Thermocouples data sheet 901006</b>				
901006/65-547-2043-15-500-668/922	2 × NiCr-Ni, type "K"	-35 to +800 °C	500	Stop flange displaceable
901006/65-547-2043-15-710-668/922			710	
901006/65-547-2043-15-1000-668/922			1000	
901006/65-546-2042-15-500-668/922	2 × Fe-CuNi, type "L"	-35 to +700 °C	500	
901006/65-546-2042-15-710-668/922			710	
901006/65-546-2042-15-1000-668/922			1000	
901006/66-550-2043-6-500-668/922	2 × NiCr-Ni, type "K"	-35 to +1000 °C	500	
901006/66-550-2043-6-355-668/922			355	
901006/66-550-2043-6-250-668/922			250	
901006/66-880-1044-6-250-668/922	1 × PT10Rh-PT, type "S"	0 to 1300 °C	250	
901006/66-880-1044-6-355-668/922			355	
901006/66-880-1044-6-500-668/922			500	
901006/66-880-2044-6-250-668/922	2 × PT10Rh-PT, type "S"	0 to 1300 °C	250	Stop flange displaceable
901006/66-880-2044-6-355-668/922			355	
901006/66-880-2044-6-500-668/922			500	

Current type designation	Probe type	Temperature range	Nom. length mm	Process connection
901006/66-953-1046-6-250-668/922	1 × PT30Rh-PT6Rh, type "B"	600 to 1500 °C	250	
901006/66-953-1046-6-355-668/922			355	
901006/66-953-1046-6-500-668/922			500	
901006/66-953-2046-6-250-668/922	2 × PT30Rh-PT6Rh, type "B"	600 to 1500 °C	250	
901006/66-953-2046-6-355-668/922			355	
901006/66-953-2046-6-500-668/922			500	

**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 Email: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex, CM20 2DY, UK  
 Phone: +44 1279 63 55 33  
 Fax: +44 1279 62 50 29  
 Email: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 6733 Myers Road  
 East Syracuse, NY 13057, USA  
 Phone: +1 315 437 5866  
 Fax: +1 315 437 5860  
 Email: info.us@jumo.net  
 Internet: www.jumousa.com



## DIN-approved probes for the operating media water and oil

**Note:** because of the high response accuracy, **the use of thermowells** (immersion sleeves) **is not admissible**.

Current type designation	Probe type	Temperature range	Nom. length mm	Process connection
<b>RTD temperature probe data sheet 902006</b>				
902006/10-226-1003-1-9-250-104/922	1 × Pt100	-40 to +480 °C	250	Screw connection G1/2
902006/10-226-2003-1-9-250-104/922	2 × Pt100		250	
902006/54-227-2003-1-15-710-254/922	2 × Pt100	-170 to 550 °C	65 to 670	Displaceable screw connection G1/2
902006/54-227-1003-1-15-710-254/922	1 × Pt100		65 to 670	
902006/10-402-1003-1-9-100-104/922	1 × Pt100	-170 to 400 °C	100	Screw connection G1/2
902006/10-402-2003-1-9-100-104/922	2 × Pt100		100	
<b>Thermocouples data sheet 901006</b>				
901006/54-544-2043-15-710-254/922	2 × NiCr-Ni, type "K"	-35 to 550 °C	65 to 670	Displaceable screw connection G1/2
901006/54-544-1043-15-710-254/922	1 × NiCr-Ni, type "K"		65 to 670	
901006/54-544-2042-15-710-254/922	2 × FeCuNi, type "L"		65 to 670	
901006/54-544-1042-15-710-254/922	1 × FeCuNi, type "L"		65 to 670	

**Note:** because of the high response accuracy, **only use thermowells** (immersion sleeves) **that are included** in the scope of delivery.

Current type designation	Probe type	Temperature range	Nom. length mm	Process connection
<b>RTD temperature probe data sheet 902006</b>				
902006/53-505-2003-1-12-190-815/922	2 × Pt100	-40 to +400 °C	190	
902006/53-507-2003-1-12-100-815/922	2 × Pt100 (arranged beneath each other in the sheath)	-40 to +480 °C	100	
902006/53-507-2003-1-12-160-815/922			160	
902006/53-507-2003-1-12-190-815/922			190	
902006/53-507-2003-1-12-220-815/922			220	
902006/53-507-1003-1-12-100-815/922	1 × Pt100	-40 to +480 °C	100	Weldable sleeve
902006/53-507-1003-1-12-160-815/922			160	
902006/53-507-1003-1-12-220-815/922			220	
902006/53-505-1003-1-12-190-815/922	1 × Pt100	-40 to +400 °C	190	
902006/53-505-3003-1-12-100-815/922	3 × Pt100	-40 to +400 °C	100	
902006/53-505-3003-1-12-160-815/922			160	
902006/53-505-3003-1-12-220-815/922			220	
902006/40-226-1003-1-12-220-815/922	1 × Pt100	-170 to +480 °C	220	Weldable sleeve
902006/40-226-1003-1-12-160-815/922			160	
902006/40-226-1003-1-12-100-815/922			100	
<b>Thermocouples data sheet 901006</b>				
901006/53-543-1042-12-220-815/922	1 × Fe-CuNi type "L"	-35 to 480 °C	220	Weldable sleeve
901006/53-543-2042-12-220-815/922	2 × Fe-CuNi type "L"		220	

## DIN-approved probes for the operating media air, water, and oil

**Note:** because of the high response accuracy, **the use of thermowells** (immersion sleeves) **is not admissible**.

Current type designation	Probe type	Temperature range	Nom. length mm	Process connection
<b>RTD temperature probe data sheet 902006</b>				
902006/10-390-1003-1-8-250-104/22	1 × Pt100	max. 300 °C	250	Screw-in thread G1/2
<b>Thermocouples data sheet 901006</b>				
901006/45-551-2043-2-xxxx-11-xxxx	2 × NiCr-Ni, type "K"	max. 1150 °C	50 to 2000	

**Note:** The probes described in data sheets 901006 and 902006 are also certified for the Pressure Equipment Directive.

**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 Email: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex, CM20 2DY, UK  
 Phone: +44 1279 63 55 33  
 Fax: +44 1279 62 50 29  
 Email: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 6733 Myers Road  
 East Syracuse, NY 13057, USA  
 Phone: +1 315 437 5866  
 Fax: +1 315 437 5860  
 Email: info.us@jumo.net  
 Internet: www.jumousa.com



## Protective, regulation, and control devices

### Safety temperature monitor STW<sup>1</sup>

The safety temperature monitor is a device that is automatically reset after responding if the sensor temperature has fallen below or risen above the set limit value by an amount equal to the switching differential. Possible settings: monitoring for limit value overrange or underrange.

Mode of operations:

Minimum requirements: 2B, 2K, 2P

Additional requirements fulfilled: 2N, 2D

### Safety temperature limiter STB<sup>1</sup>

The safety temperature limiter is a device that is permanently locked after responding.

Manual reset using the RESET key is possible once the probe temperature has fallen below / has exceeded the limit value by the amount of the switching differential. Possible settings: monitoring for overrange or underrange.

Mode of operations:

Minimum requirements: 2B, 2J, 2V, 2K, 2P and adjustable with special tools

Additional requirements fulfilled: 2N, 2F, 2D

<sup>1</sup>: For more detailed explanation, see DIN EN 14 597.

## Connection possibilities of the sensors

The JUMO safetyM STB/STW evaluation device structure is basically identical. Various possibilities are available for sensor connection. These possibilities are listed in the following table along with the achievable SIL level:

Variant	Connected sensors	Architecture		Achievable SIL			
		Sensor technology	Logic				
1	1 x Pt100 two-wire circuit, single sensor	1oo1	1oo2D	2			
1a	2x Pt100/1000 two-wire circuit	1oo2	1oo2D	3			
2	2x Pt100/1000 three-wire circuit	1oo2	1oo2D	3			
3	2x thermocouple	1oo2	1oo2D	3			
4	1x Pt100/1000 two-wire and three-wire circuit 1x thermocouple	1oo2	1oo2D	3			
5	STB/STW 70.1150 without 1oo2D sensor technology architecture: No probe or use of 4 to 20 mA (means that the sensor is not taken into account for calculation).	Sensors connected by the plant operator: architecture according to connection 1oo1 or 1oo2	1oo2D	SIL (architecture) of the sensor used (HW only)	Systematic compatibility (SC) of the sensor used	Max. achievable SIL of the system with 1oo1 sensor technology architecture	Max. achievable SIL of the system with 1oo2 sensor technology architecture
				1	1	1	1
				1	2	1	2
				2	2	2	2
				2	3	2	3
3	3	3	3				

### Note:

Variants 1 to 4 were evaluated with JUMO probes according to data sheets 901006 and 902006. For variant 5 no sensor technology was included. In this case, the plant operator selects the sensor technology. For this reason, the plant operator is responsible for evaluating the achievable SIL. If the used SIL-capable sensor consists of hardware and software (e.g. transmitter), the maximum SIL that can be achieved – irrespective of the architecture – is the one according to which the sensor software was developed (so, for example, if the sensor software has SIL 2, the max. achievable SIL is 2).

The possibility to connect passive sensors such as double thermocouples or Pt100/Pt1000 sensors means that the sensors do not necessarily require a SIL qualification. In this case, the specification of the failure rates for the passive sensors is sufficient for the SIL qualification of the overall system. The plant operator must always determine the PFD<sub>avg</sub> and/or PFH value of the overall safety chain to determine the achieved SIL.

**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 Email: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex, CM20 2DY, UK  
 Phone: +44 1279 63 55 33  
 Fax: +44 1279 62 50 29  
 Email: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 6733 Myers Road  
 East Syracuse, NY 13057, USA  
 Phone: +1 315 437 5866  
 Fax: +1 315 437 5860  
 Email: info.us@jumo.net  
 Internet: www.jumousa.com



## Failure rates and SFF for 701155...23 (AC 230 V)

Table 1:

Variant	$\lambda_s$ [FIT]	$\lambda_{dd}$ [FIT]	$\lambda_{du}$ [FIT]	SFF	PFH (1/h)	PFD <sub>avg</sub>
1	985.14	306.75	32.93	96 %	5.18 e <sup>-9</sup>	2.29 e <sup>-4</sup>
1a	985.14	306.75	32.93	96 %	1.66 e <sup>-9</sup>	7.29 e <sup>-5</sup>
2	988.1	303.79	32.93	96 %	1.66 e <sup>-9</sup>	7.29 e <sup>-5</sup>
3	1001.55	324.85	36.68	96 %	1.71 e <sup>-9</sup>	7.46 e <sup>-5</sup>
4	1007.61	341.89	38.58	96 %	1.73 e <sup>-9</sup>	7.55 e <sup>-5</sup>
5	1000.95	318.38	31.75	96 %	1.54 e <sup>-9</sup>	6.74 e <sup>-5</sup>

## Failure rates and SFF for 701155...25 (AC/DC 24 V)

Table 2:

Variant	$\lambda_s$ [FIT]	$\lambda_{dd}$ [FIT]	$\lambda_{du}$ [FIT]	SFF	PFH (1/h)	PFD <sub>avg</sub>
1	919.23	306.82	34.24	96 %	7.22 e <sup>-9</sup>	3.19 e <sup>-4</sup>
1a	919.23	306.82	34.24	96 %	3.71 e <sup>-9</sup>	1.63 e <sup>-4</sup>
2	886.19	303.86	34.24	96 %	3.71 e <sup>-9</sup>	1.63 e <sup>-4</sup>
3	947.18	325.86	37.89	96 %	3.75 e <sup>-9</sup>	1.64 e <sup>-4</sup>
4	953.24	350.21	40.59	96 %	3.85 e <sup>-9</sup>	1.69 e <sup>-4</sup>
5	938.89	323.57	36.89	96 %	3.68 e <sup>-9</sup>	1.61 e <sup>-4</sup>

**Note:**

Variants 1 to 4 were evaluated with JUMO probes according to data sheets 901006 and 902006.

For variant 5, no sensor technology was included (only the JUMO safetyM STB/STW Ex).

In this case, the plant operator selects the sensor technology.

The PFH and PFD<sub>avg</sub> values were calculated with the assumption that the time to restore the system is 8 h (MTTR = 72 h). Furthermore, the calculation was based on a lifetime of 10 years (T<sub>1</sub> = 10 y). The Common Cause Factor was determined according to the tables of DIN EN 61508 for sensor technology and logic.

## Achievable PL

Variant	Connected sensors	Sensor technology architecture	Logic architecture	Achievable PL		
1	1x Pt100 two-wire circuit	1oo1	1oo2D	PLd		
1a	2x Pt100/1000 two-wire circuit	1oo2	1oo2D	PLe		
2	2x Pt100/1000 three-wire circuit	1oo2	1oo2D	PLe		
3	2x thermocouple	1oo2	1oo2D	PLe		
4	1x Pt100/1000 two-wire and three-wire circuit 1x thermocouple	1oo2	1oo2D	PLe		
5	STB/STW 701155 without 1oo2D sensor technology architecture. No probe or use of the input 4 to 20 mA (means that the sensor is not taken into account for the calculation).	Sensors connected by the plant operator; architecture according to connection 1oo1 or 1oo2	1oo2D	PL of the used sensor MTFF <sub>d</sub> = 100 years	Max. achievable PL of the system with 1oo1 sensor technology architecture DC <sub>701155</sub> ≥ 90 %	Max. achievable PL of the system with 1oo2 sensor technology architecture DC <sub>701155</sub> ≥ 90 %
				PLb	PLd	PLe
				PLc	PLd	PLe
				PLd	PLd	PLe
				PLe	PLe	PLe

**Note:**

Variants 1 to 4 were evaluated with JUMO probes according to data sheets 901006 and 902006. For variant 5, no sensor technology was included (only the JUMO safetyM STB/STW). In this case, the plant operator selects the sensor technology. For this reason, the plant operator is responsible for evaluating the achieved PL.

**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 Email: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex, CM20 2DY, UK  
 Phone: +44 1279 63 55 33  
 Fax: +44 1279 62 50 29  
 Email: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 6733 Myers Road  
 East Syracuse, NY 13057, USA  
 Phone: +1 315 437 5866  
 Fax: +1 315 437 5860  
 Email: info.us@jumo.net  
 Internet: www.jumousa.com



## Calculations DIN EN ISO 13849-1 Performance Level – low voltage 230 V

Table 3:

Variant	MTTF <sub>d</sub>	DC <sub>avg</sub>	CCF	PL
1	100 years <sup>3</sup> (336 years)	90 %	80	PLd
1a	100 years <sup>3</sup> (336 years)	90 %	80	PLe
2	100 years <sup>3</sup> (339 years)	90 %	80	PLe
3	100 years <sup>3</sup> (316 years)	90 %	80	PLe
4	100 years <sup>3</sup> (312 years)	90 %	80	PLe
5	100 years <sup>3</sup> (326 years)	91 %	80	See table for achievable PL

## Calculations DIN EN ISO 13849-1 Performance Level – extra low voltage (ELV) 24 V

Table 4:

Variant	MTTF <sub>d</sub>	DC <sub>avg</sub>	CCF	PL
1	100 years <sup>3</sup> (335 years)	90 %	80	PLd
1a	100 years <sup>3</sup> (335 years)	90 %	80	PLe
2	100 years <sup>3</sup> (338 years)	90 %	80	PLe
3	100 years <sup>3</sup> (314 years)	90 %	80	PLe
4	100 years <sup>3</sup> (304 years)	90 %	80	PLe
5	100 years <sup>3</sup> (317 years)	90 %	80	See table for achievable PL

3. The MTTF<sub>d</sub> value of a partial system must be limited to 100 years according to the DIN EN ISO 13849-1 requirements.

## ATEX identification marking, ignition protection type "i"

1-sensor variant:

Type: 701155/...-044 [Ex „i“]

II (1) (2) (3) G; (b1) [Ex ia Ga] [e pz] IIC  
 II (1) (2) (3) D; (b1) [Ex ia Da] [p Dc] IIIC

Standard designation according to EN 60079-0  
 Explosion group II C gases, low ignition energy such as hydrogen  
 III C conductive dusts

Standard designation according to EN 50495 <sup>1)</sup>  
 e: temperature monitoring unit with SIL 2 and HFT from 0 for category 2 based on ignition protection type "e" increased safety according to EN 60079-7  
 pz: minimum overpressure monitoring for static overpressure encapsulation with SIL 2 and HFT from 0 for category 3 based on the ignition protection type "p" overpressure encapsulation according to EN 60079-2  
 p Dc: minimum overpressure monitoring for static overpressure encapsulation with SIL 2 and HFT from 0 for category 3 based on the ignition protection type "pD" according to EN 61241-4 equivalent to "pz" according to EN 60079-2)

Standard designation according to standard series EN 60079 for electrical devices  
 ia: related equipment according to ignition protection "i" intrinsically safe according to EN 60079-11,  
 "ia " (2-failsafe) for category 1  
 "EPL" (Equipment Protection Level)  
 Ga (gases) for category 1  
 Da (dust) for category 1

Standard designation according to standard series EN 13463 for non-electrical devices  
 "b1" ignition source monitoring according EN 13463-6 with IPL 1 (Ignition Prevention Level) for category 2

**Standard designation**

Category according to ATEX directive 94/9/EG  
 G: gas explosion protection; D: dust explosion protection

Safety device according to EN 50495 for category 3 applications for ignition protection type static overpressure encapsulation type "pz" according to EN 60079-2

Safety devices according to EN 50495 for category 2 applications for ignition protection type increased safety "e" nach EN 60079-7  
 Safety device according to EN 13463-6 for category 2 applications for ignition protection: ignition source monitoring of non-electrical ignition dangers "b1" according to EN 13463-6

Related equipment for intrinsic safety according to EN 60079-11 for category 1  
 Applications for ignition protection type intrinsic safety "ia"

Guidelines designation for device group II (non-firedamp endangered mine workings)

**Designation explosionproof according to ATEX directive 94/9/EG**

<sup>1)</sup> The monitored electrical equipment is not a potential ignition source in standard operation

**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 Email: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex, CM20 2DY, UK  
 Phone: +44 1279 63 55 33  
 Fax: +44 1279 62 50 29  
 Email: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 6733 Myers Road  
 East Syracuse, NY 13057, USA  
 Phone: +1 315 437 5866  
 Fax: +1 315 437 5860  
 Email: info.us@jumo.net  
 Internet: www.jumousa.com



**2-sensor variant:**

Type: 701155/...-044 [Ex „i“]

	II (1) (1) (2) G II (1) (1) (2) D	(b2) [Ex ia Ga] [e py] IIC (b2) [Ex ia Da] [p Db] IIIC
	<p>Standard designation according to EN 60079-0          Explosion group II C gases, low ignition energy such as hydrogen          III C conductive dusts</p> <hr/> <p>Standard designation according to EN 50495 <sup>1)</sup>          e: temperature monitoring unit with SIL 2 and HFT from 0 for category 2 based on ignition protection type "e" increased safety according to EN 60079-7</p> <p>py: minimum overpressure monitoring for static overpressure encapsulation with SIL 2 and HFT from 1 for category 2 based on the ignition protection type "p" overpressure encapsulation according to EN 60079-2</p> <p>p Db: minimum overpressure monitoring for static overpressure encapsulation with SIL 2 and HFT from 0 für category 2 based on the ignition protection type "pD" according to EN 61241-4 (equivalent to "py" according to EN 60079-2)</p> <hr/> <p>Standard designation according to standard series EN 60079 for electrical devices          ia: related equipment according to ignition protection "i" intrinsically safe according to EN 60079-11,          "ia" (2-failsafe) for category 1          "EPL" (Equipment Protection Level)          Ga (gases) for category 1          Da (dust) for category 1</p> <hr/> <p>Standard designation according to standard series EN 13463 for non-electrical devices          "b2" ignition source monitoring according EN 13463-6 with IPL 2 (Ignition Prevention Level) for category 1</p> <hr/> <p><b>Standard designation</b></p> <p>Category according to ATEX directive 94/9/EG          G: gas explosion protection; D: dust explosion protection</p> <hr/> <p>Safety device according to EN 50495 for category 2 applications for ignition protection type static overpressure encapsulation type "py" according to EN 60079-2</p> <hr/> <p>Safety devices according to EN 50495 for category 1 applications for ignition protection type increased safety "e" nach EN 60079-7          Safety device according to EN 13463-6 for category 1 applications for ignition protection: ignition source monitoring of non-electrical ignition dangers "b2" according to EN 13463-6</p> <hr/> <p>Related equipment for intrinsic safety according to EN 60079-11 for category 1          Applications for ignition protection type intrinsic safety "ia"</p> <hr/> <p>Guidelines designation for device group II (non-firedamp endangered mine workings)</p> <hr/> <p><b>Designation explosionproof according to ATEX directive 94/9/EG</b></p>	

<sup>1)</sup> The monitored electrical equipment is not a potential ignition source in standard operation

## Probe arrangement in the Ex-area "i"

The STB/STW 701155 has the following maximum output data at the intrinsically safe inputs:				
$U_o = 6.0 \text{ V}$	$I_o = 41.2 \text{ mA}$	$P_o = 61.8 \text{ mW}$	$C_o = 36.3 \text{ }\mu\text{F}$	$L_o = 20 \text{ mH}$


The specified energy values are available as a total amount per device. The distribution to the inputs is not defined.

Example: double Pt100 with protection tube constant 80 K/W: temperature increase of 80 K/W x 61.8 mW = 4.9 K.  
 If a separate temperature increase for dust is specified in the technical data sheet from JUMO, this means that the protection fitting is completely covered in dust.

**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 Email: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex, CM20 2DY, UK  
 Phone: +44 1279 63 55 33  
 Fax: +44 1279 62 50 29  
 Email: sales@jumo.co.uk  
 Internet: www.jumo.co.uk


**JUMO Process Control, Inc.**  
 6733 Myers Road  
 East Syracuse, NY 13057, USA  
 Phone: +1 315 437 5866  
 Fax: +1 315 437 5860  
 Email: info.us@jumo.net  
 Internet: www.jumousa.com

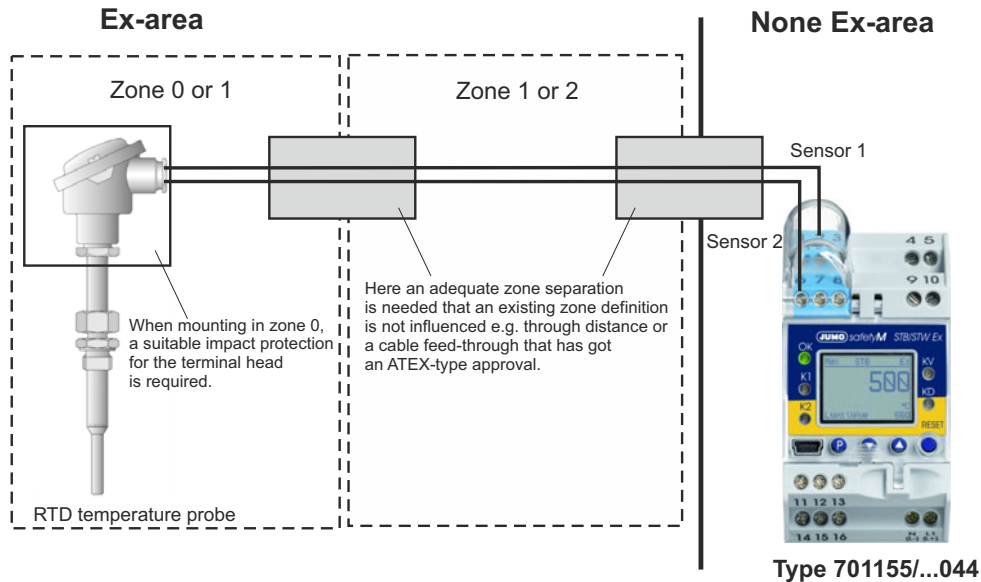

**Note:**

The sensor technology specified in Page 10 does not have zone separation. The type of zone separation as well as the cable selection must be implemented or selected in such a way that the defined zone classifications and their requirements continue to be in place.

Use of a probe with EPL "Gb" with a separation element (DIN EN 60079-26). The figure shows a probe with active zone separation according to DIN EN 60079-26. Mounting of the terminal head in zone 0 is not permitted. However, use in zone 0 is permitted below the separation element. The same requirements as in the above figure apply for the zone classification.

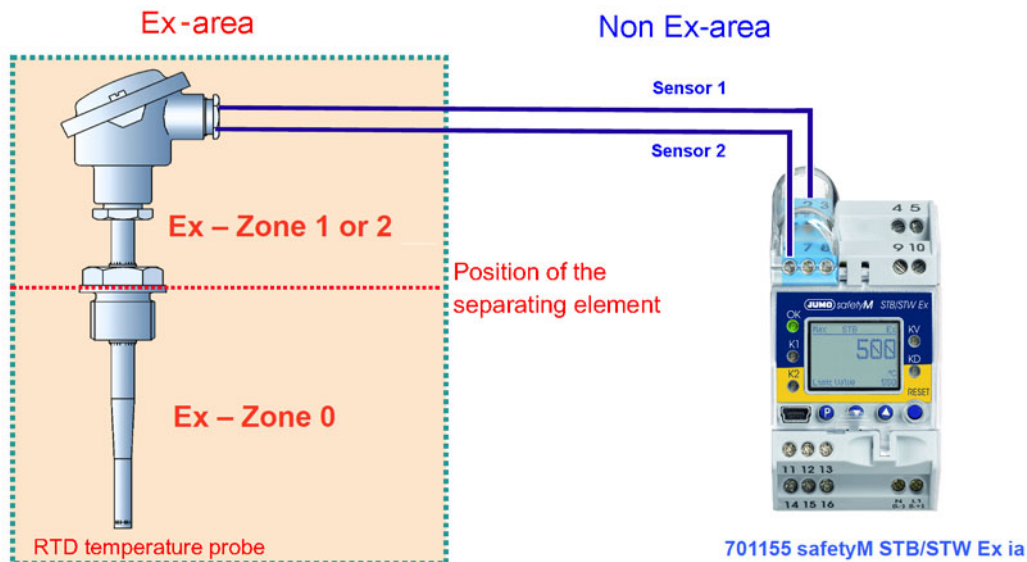



**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 Email: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex, CM20 2DY, UK  
 Phone: +44 1279 63 55 33  
 Fax: +44 1279 62 50 29  
 Email: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 6733 Myers Road  
 East Syracuse, NY 13057, USA  
 Phone: +1 315 437 5866  
 Fax: +1 315 437 5860  
 Email: info.us@jumo.net  
 Internet: www.jumousa.com



## ATEX identification marking, ignition protection type "e" and "t"

### 1-sensor-variant:

Type: 701155/...-045 [Ex „e“, „t“]


	II (2) G (b1) [Ex eb Gb] [Ex eb Gb] IIC
	II (2) D (b1) [Ex tb Db] [Ex tb Db] IIIC
	Standard designation according to EN 60079-0 Explosion group II C gases, low ignition energy such as hydrogen III C conductive dusts
	Standard designation according to EN 50495 eb: increased safety      b = zone 1 or 2 for gas tb: protection with housing b = zone 21 or 22 for dust
	Standard designation according to EN 60079 for electrical devices ignition protection „e“ increased safety according to EN 60079-7 ignition protection „t“ dust explosion protection with housing accord. to EN 60079-31 Equipment Protection Level: Gb: for use in zone 1 or 2 for gases Db: for use in zone 21 or 22 for dust
	Standard designation according to EN 13463 for non electrical devices „b1“ ignition source monitoring according to EN 13463-6 with IPL 1 (Ignition Prevention Level) for category 2
	<b>Standard designation</b>
	Category according to ATEX directive 2014/34/EU G: gas explosion protection D: dust explosion protection
	Safety devices according to EN 50495 for category 2 applications for ignition protection type increased safety "e" according to EN 60079-7 Safety device according to EN 13463-6 for category 2 applications for ignition protection: Ignition source monitoring of non-electrical ignition dangers "b1" according to EN 13463-6
	Guidelines designation for device group II (non-firedamp endangered mine workings)
<b>Designation explosionproof according to ATEX directive 2014/34/EU</b>	

### 2-sensor-variant:

Type: 701155/...-045 [Ex „e“, „t“]

	II (2) G (b2) [Ex eb Gb] [Ex eb Gb] IIC
	II (2) D (b2) [Ex tb Db] [Ex tb Db] IIIC
	Standard designation according to EN 60079-0 Explosion group II C gases, low ignition energy such as hydrogen III C conductive dusts
	Standard designation according to EN 50495 eb: increased safety      b = zone 1 or 2 for gas tb: protection with housing b = zone 21 or 22 for dust
	Standard designation according to EN 60079 for electrical devices ignition protection „e“ increased safety according to EN 60079-7 ignition protection „t“ dust explosion protection with housing accord. to EN 60079-31 Equipment Protection Level: Gb: for use in zone 1 or 2 for gases Db: for use in zone 21 or 22 for dust
	Standard designation according to EN 13463 for non electrical devices „b2“ ignition source monitoring according to EN 13463-6 with IPL 2 (Ignition Prevention Level) for category 1
	<b>Standard designation</b>
	Category according to ATEX directive 2014/34/EU G: gas explosion protection D: dust explosion protection
	Safety devices according to EN 50495 for category 2 applications for ignition protection type increased safety "e" according to EN 60079-7 Safety device according to EN 13463-6 for category 2 applications for ignition protection: Ignition source monitoring of non-electrical ignition dangers "b1" according to EN 13463-6
	Guidelines designation for device group II (non-firedamp endangered mine workings)
<b>Designation explosionproof according to ATEX directive 2014/34/EU</b>	

## Probe arrangement in the Ex-area "e" and "t"

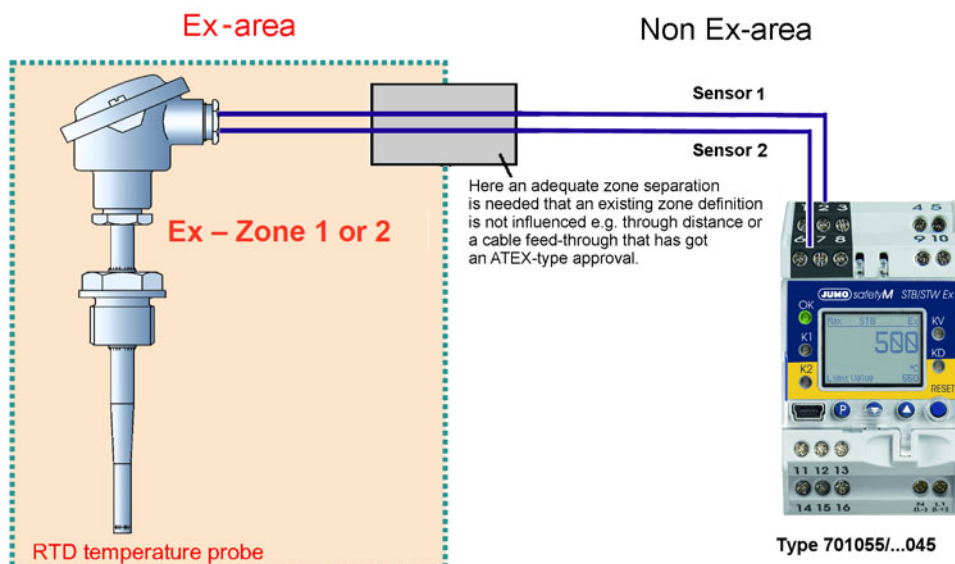

## IECEx identification marking



[Ex ia Ga] IIC

Associated apparatus which is set up outside the gas atmosphere but the intrinsically safe electrical circuit "ia" (protection through double protective measures) leads into zone 0.

[Ex ia Da] IIIC

Associated apparatus which is set up outside the dust atmosphere but the intrinsically safe electrical circuit "ia" (protection through double protective measures) leads into zone 20.

[Ex ia Ga] IIC  
 [Ex ia Da] IIIC

Standard designation according to IEC 60079-0  
 Explosion group II C gases, low ignition energy such as hydrogen  
 III C conductive dusts

---

Standard designation according to standard series IEC 60079 for electrical devices  
 ia: related equipment according to ignition protection "I" intrinsically safe according to IEC 60079-11,  
 "ia" (2-failsafe) for category 1  
 "EPL" (Equipment Protection Level)  
 Ga (gases) for category 1  
 Da (dust) for category 1

Explanation

### Setup program

When using the device to monitor minimum excess pressure for static pressurization based on the ignition protection category "p" according to EN 60079-2 then the setup program is required for the display of the "Pa" pressure unit.

### Scope of delivery

1 JUMO safetyM STB/STW Ex in the ordered version
1 operating manual

**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 Email: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex, CM20 2DY, UK  
 Phone: +44 1279 63 55 33  
 Fax: +44 1279 62 50 29  
 Email: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 6733 Myers Road  
 East Syracuse, NY 13057, USA  
 Phone: +1 315 437 5866  
 Fax: +1 315 437 5860  
 Email: info.us@jumo.net  
 Internet: www.jumousa.com



## Order details

<b>701155</b>	<b>Basic type</b> Safety temperature limiter/monitor (STB)/(STW) according to DIN EN 14597 with SIL, PL, and IPL approval
8	<b>Version</b> Default setting
9	Configured according to customer specifications
01	<b>National language</b> German (default setting)
02	English
03	French
0251	<b>Switching behavior</b> Safety temperature monitor max. alarm (opening function)
0252	Safety temperature monitor min. alarm (closing function)
0253	Safety temperature limiter max. alarm (opening function)
0254	Safety temperature limiter min. alarm (closing function)
1003	<b>Measurement input<sup>1</sup> (programmable)</b> 1x Pt100 in two-wire circuit
2001	2x Pt100 in three-wire circuit (default setting)
2003	2x Pt100 in two-wire circuit
2005	2x Pt1000 in two-wire circuit
2006	2x Pt1000 in three-wire circuit
2036	2x W5Re-W26Re "C"
2037	2x W3Re-W25Re "D"
2039	2x Cu-CuNi "T"
2040	2x Fe-CuNi "J"
2041	2x Cu-CuNi "U"
2042	2x Fe-CuNi "L"
2043	2x NiCr-Ni "K"
2044	2x Pt10Rh-Pt "S"
2045	2x Pt13Rh-Pt "R"
2046	2x Pt30Rh-Pt6Rh "B"
2048	2x NiCrSi-NiSi "N"
1053	1x 4 to 20 mA
2053	2x 4 to 20 mA
23	<b>Voltage supply</b> AC 110 to 240 V +10 % /-15 %, 48 to 63 Hz
25	AC/DC 20 to 30 V, 48 to 63 Hz
044	<b>Ignition protection type</b> [Ex ia] associated apparatus, installation outside the Ex-area
045	[Ex eb, tb] associated apparatus, "eb" for gas, "tb" for dust, installation outside the Ex-area
001	<b>Analog output (configurable)</b> 0 to 20 mA
005	4 to 20 mA (default setting)
040	0 to 10 V
070	2 to 10 V
059	<b>Extra code</b> SIL, PL, IPL approval is always present
062	DNVGL approval

701155/ 8- 01 - 0253 - 2001 - 23- 044 - 005/ 059

1. The first digit on the measurement input means single probe "1" or double probe "2"

## Accessories

Item	Sales no.
Setup program, multilingual	70/00548742
USB cable	70/00506252
External unlocking button RT	70/97097865