REVISIONS					
REV	DESCRIPTION	DATE	ECO	DR	APPD

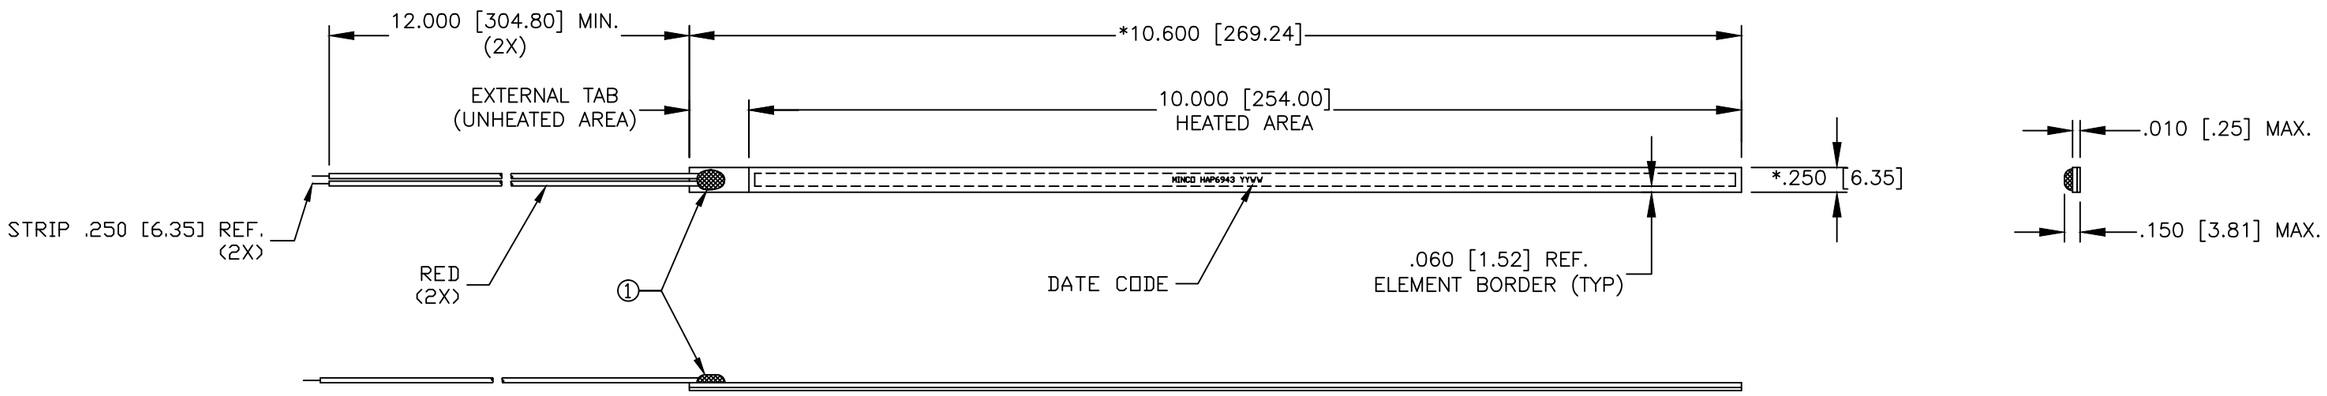

8. PART IS RoHS COMPLIANT.
7. DIMENSIONS PRECEDED BY AN * ARE CONTROLLED BY ENGINEERING DESIGN AND TOOLING.
6. INSULATION: POLYIMIDE.
5. LEADWIRE: A.W.G. #30, STRANDED, TFE INSULATED PER NEMA HP3.
4. DIELECTRIC STRENGTH: 500 VOLTS RMS AT 60 Hz FOR 1 MINUTE, ELEMENT TO OUTER SURFACES.
3. TEMPERATURE LIMIT: 260°C MAXIMUM AT ZERO POWER.
2. RESISTANCE: 24.42 OHMS (26.85/21.98).
1. ELEMENT: NON-INDUCTIVE PATTERN.

ITEM	REQD	PART/STOCK NO	MATERIAL DESCRIPTION
1	AR	707-1706 AND 060-4024-01	HIGH TEMPERATURE EPOXY, BLACK

UNLESS OTHERWISE SPECIFIED
DIMENSIONS AND TOLERANCES IN INCHES
DIMENSIONS IN [ ] ARE IN MILLIMETERS
ONE PLACE (.0) / TWO PLACE (.00) / THREE PLACE (.000) } ±.030 [±0,76]
ANGLES:

MATERIAL:

FINISH:

	INITIALS	DATE
DR	LRK 2368	11-11-13
CHK		
APP		
ENGR	GWG 3479	11-22-13
QA		
PRD		
NEXT ASSY		CATEGORY
USED ON		INIT. JOB

TITLE:

THERMOFOIL
HEATER
MODEL HAP6943

MINCO
www.minco.com

COMPANY CONFIDENTIAL
PROPRIETARY INFORMATION OF MINCO PRODUCTS, INC.
DO NOT DUPLICATE

HAP6943 REV –

STOCK NO | SCALE NONE | DWG SIZE B | CAGE IDENT. 09359 | SHEET 1 OF 1