





**INSTRUCTION MANUAL**  
**AC VOLTAGE DETECTOR/FLASHLIGHT**  
**PAN VOLT FINDER**



 **Read and understand** all of the instructions and safety information in this manual before operating or servicing this tool.

**Description**

The Volt finder voltage detector is intended to check for the presence of AC voltage, signaling the user with an LED on. Built-in bright flashlight with ON/OFF button and audible beeper indicator.

**Feature/Benefits:**


- Non-Contact Detection of AC Voltage 200~1000VAC (50/60Hz).
- Rugged, double molded case.
- May be used to find a break in a wire or detect the presence of voltage at outlets, lighting fixtures, circuit breakers, wires and cables.
- Bright LED and audible beeper indicator if voltage is present.
- Built-in bright flashlight with ON/OFF button.
- Convenient size with pocket clip.
- An essential tool for every electrician and tradesperson.


- Audible beeper indicator


**Safety**


This instruction manual and any markings on the tool provide information for avoiding hazards and unsafe practices related to the use of this tool. Observe all of the safety information provided.

**Important Safety Information**

	<b>WARNING</b>
	Read and understand this material before operating or servicing this equipment. Failure to understand how to safely operate this tool can result in an accident causing serious injury or death.


	<b>WARNING</b>
	Electric shock hazard: Contact with live circuits can result in severe injury or death.

	<b>WARNING</b>
Electric shock hazard:	
<ul style="list-style-type: none"><li>● Do not use the unit if it is wet or damaged.</li><li>● Do not apply more than the rated voltage between the probe tip and earth ground.</li><li>● Do not operate with the case open.</li></ul>	
Failure to observe these warning can result in severe injury or death.	

	<b>CAUTION</b>
<ul style="list-style-type: none"><li>● Do not attempt to repair this unit. It contains no user-serviceable parts.</li><li>● Do not expose the unit to extremes in temperature or high humidity. See Specifications.</li></ul>	
Failure to observe these precautions can result in injury and can damage the	

instrument.

#### Detector Description

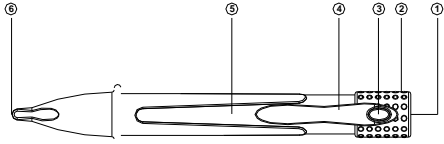

- ① Flashlight
- ② Detector cap
- ③ Flashlight power ON/OFF
- ④ Detector handle
- ⑤ Detector body
- ⑥ Detector clip

#### Operation

The Voltage Detector is useful for the identifying hot and neutral conductors, finding a break in a wire, and detecting the presence of AC voltage at:

- Outlets
- Switches
- Circuit breakers
- Fuses
- Wires and cables

---

*Note: The voltage detector can be used to find a break in a wire:*

- *To find a break in a hot conductor, trace the wire until the signal stops.*
  - *To find a break in a neutral conductor, connect a load between the hot and neutral. Trace the wire until the signal stops.*
- 

1. Test the unit on known functioning circuit or component.
  - If the unit does not function as expected on a known functioning circuit, replace the batteries.
  - If the unit still does not function as expected, send the unit to repair.
2. Place the probe tip on or near the circuit or unit to be tested.

LED and audible beeper indicate the presence of AC Voltage from 200~1000 VAC (50/60Hz).

---

Note: The voltage detector cannot detect voltage on armored cable or on cable in conduit, behind panels, or in metallic enclosures.

---

#### Specifications

Indicators: LED and audible beeper

Voltage Range: 200~1000 VAC (50/60Hz)

Over voltage Category: Category III - 1000V

Pollution Degree: 2

Battery: Two 1.5 volt batteries (AAA, NEDA 24A or IEC LR 03)

#### Battery Replacement

1. Disconnect the unit from the circuit.
2. Remove the battery compartment cover.
3. Replace the batteries (observe polarity).
4. Replace the battery compartment cover.

Dipl.Ing. Ernst **KRYSTUFEK** GmbH & Co KG  
AUSTRIA, 1230 Vienna, Pfarrgasse 79  
Tel: +43/(0)1/ 616 40 10 | Fax: +43/(0)1/ 616 40 10 – 21  
www.krystufek.at | office@krystufek.at