

reComputer J1020 v2



Introduction

reComputer J10 series are compact edge computers built with NVIDIA advanced AI embedded system Jetson Nano and Seeed reference carrier board.

With rich extension modules, industrial peripherals, thermal management combined with decades of Seeed Studio hardware expertise, reComputer Jetson is ready to help you accelerate and scale the next-gen AI product emerging diverse AI scenarios.

reComputer J1020 is compatible with the entire NVIDIA Jetson software stack, cloud-native workflows, industry-leading AI frameworks, helping deliver seamless AI integration.

Part list


- Jetson Nano x1
- Seeed reComputer J202 carrier board x1
- Passive aluminium heatsink x1
- Aluminium case (black) x1
- 12V/2A power adapter (with 5 interchangeable adapter plugs) x1



Category

Introduction	1
Part list	2
Module - Jetson Nano (production version)	3
A new dimension in AI	3
Big compute performance	3
Low power demands	3
Module technical specifications	4
Seed reference Carrier Board	5
USB Ports	6
Gigabit Ethernet	9
HDMI and Display Port	10
M.2 Key M Expansion Slot	12
Camera Connectors	14
40-Pin Expansion Header	16
Button Header	19
Fan Connector	19
RTC-Coin Cell Batter Holder	20
DC Power Jack	20
Optional Power-Over Ethernet and Backpower Headers	20
Passive Aluminium Heatsink	21
reComputer Case	21
More information	21

Module - Jetson Nano (production version)

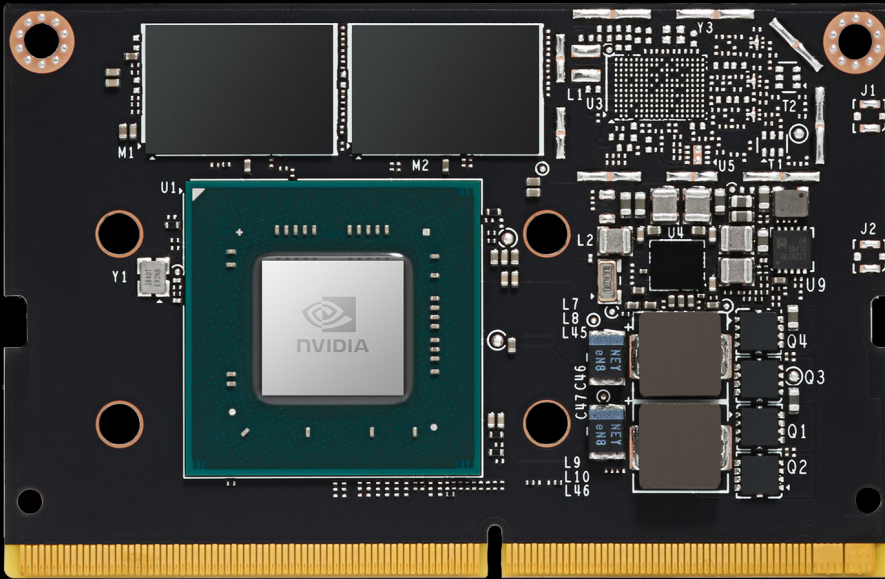

A new dimension in AI

At just 70 x 45 mm, the Jetson Nano module is smaller than a credit card. But this production-ready System on Module (SOM) delivers big when it comes to deploying AI to devices at the edge across multiple industries—from smart cities and factories to agriculture and robotics.

Big compute performance

Jetson Nano delivers 472 GFLOPs for taking on modern AI algorithms. It runs multiple neural networks in parallel and processes several high-resolution sensors simultaneously, making it ideal for applications ranging from NVRs to intelligent gateways.


Low power demands

Now, you can innovate at the edge with powerful and efficient AI, computer vision, and high-performance computing at just 5 to 10 watts.

Module Technical Specifications

GPU	NVIDIA Maxwell architecture with 128 NVIDIA CUDA® cores
CPU	Quad-core ARM Cortex-A57 MPCore processor
Memory	4 GB 64-bit LPDDR4, 1600MHz 25.6 GB/s
Storage	16 GB eMMC 5.1
Video Encode	250MP/sec; 1x 4K @ 30 (HEVC); 2x 1080p @ 60 (HEVC) 4x 1080p @ 30 (HEVC); 4x 720p @ 60 (HEVC); 9x 720p @ 30 (HEVC)
Video Decode	500MP/sec; 1x 4K @ 60 (HEVC); 2x 4K @ 30 (HEVC) 4x 1080p @ 60 (HEVC); 8x 1080p @ 30 (HEVC); 9x 720p @ 60 (HEVC)
Camera	12 lanes (3x4 or 4x2) MIPI CSI-2 D-PHY 1.1 (1.5 Gb/s per pair)
Connectivity	M.2 Key M
	10/100/1000 BASE-T Ethernet
Display	HDMI 2.0 and eDP 1.4
I/O	1x SDIO / 2x SPI / 4x I2C / 2x I2S / GPIOs -> I2C, I2S
UPHY	1 x1/2/4 PCIE, 1x USB 3.0, 3x USB 2.0
Size	69.6 mm x 45 mm
Mechanical	260-pin edge connector

Seed reference Carrier Board

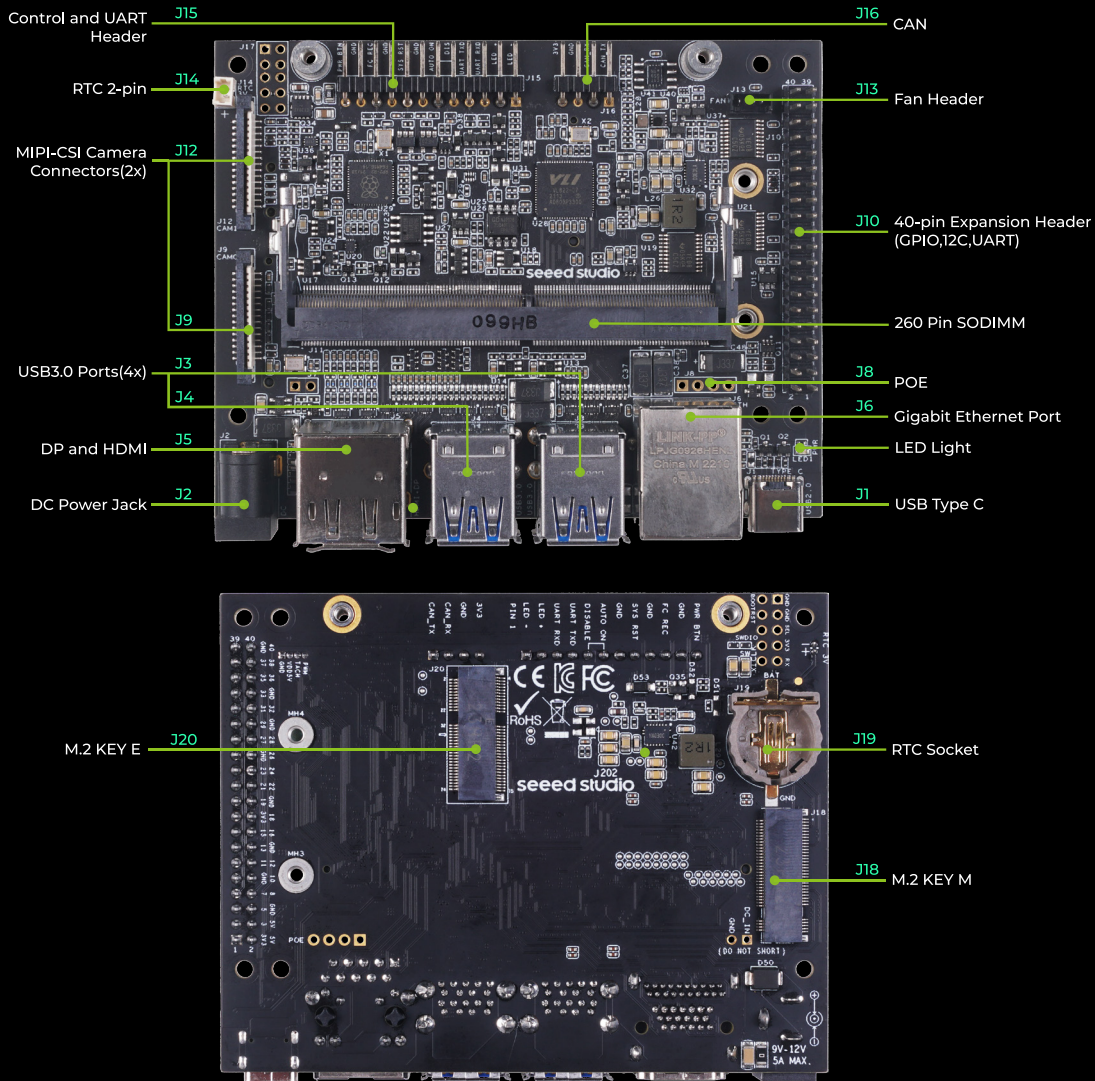

Note: When Jetson Nano is used, the M.2 E KEY and CAN cannot work

The Seed reference carrier board provides several connectors with industry standard pin outs to support additional functionality beyond what is integrated on the main platform board. These connectors are:

- USB Type C
- USB 3.0: 4 x Type A Connectors
- Gigabit Ethernet: RJ45 Connector
- HDMI / DP: HDMI Type A and DisplayPort Stacked Connector
- M.2 Key M Socket

USB Port

The carrier board supports several USB Connectors. One is a USB 2.0 Type C connector supporting Device mode only (including USB Recovery). There are two, dual stacked USB 3.0 Type A connectors. Each connector supports Host mode only. A single load switch supplies VBUS to all four USB 3.0 ports and is limited to 2A of output current.

USB 2.0 Type C data only - J1

Pin #	Module Pin Name	Module Pin #	Net Name	Usage/Description	Type/Dir Default
A4/B9	GPIO00 (USB_VBUS_EN0)	87	USB0_VBUS_DET*	VBUS Supply	Power
A9/B4					
A5	-	-	DAT_CC1	-	-
B5	-	-	DAT_CC2	-	-
A7	USB0_D_N	109	Type C_USB_DN	USB 2.0 #0 Data	Bidir
B7					
A6	USB0_D_P	111	Type C_USB_DP		
B6					
A8	-	-	-	-	-
B8	-	-	-	-	-
A1/B12	-	-	-	Ground	Ground
A12/B1	-	-	-		Ground

Note:

In the Type/Dir column, Output I s to USB connector. Input is form USB connector. Bidir is for bidirectional signals.

USB 3.0 Type A - J3:

Pin #	Module Pin Name ¹	Module Pin #	Net Name	Usage/Description	Type/Dir ²
USB 3.0 Type A (4)					
1	–	–	–	VBUS Supply	Power
2	USB1_D_N	115	HUB_HSD4_N	USB 2.0 #4 Data from hub	Bidir
3	USB1_D_P	117	HUB_HSD4_P		
4	–	–	–	Ground	Ground
5	USBSS_RX_N	161	HUB_SSRX4_N	USB 3.1 Receive #4 Data from hub	Input
6	USBSS_RX_P	163	HUB_SSRX4_P		
7	–	–	–	Ground	Ground
8	USBSS_TX_N	166	HUB_SSTX4_N	USB 3.1 Transmit #4 Data from hub	Output
9	USBSS_TX_P	168	HUB_SSTX4_P		
USB 3.0 Type A (3)					
10	–	–	–	VBUS Supply	Power
11	USB1_D_N	115	HUB_HSD3_N	USB 2.0 Data #3 Data from hub.	Bidir
12	USB1_D_P	117	HUB_HSD3_P		
13	–	–	–	Ground	Ground
14	USBSS_RX_N	161	HUB_SSRX3_N	USB 3.1 Receive #3 Data from hub	Input
15	USBSS_RX_P	163	HUB_SSRX3_P		
16	–	–	–	Ground	Ground
17	USBSS_TX_N	166	HUB_SSTX3_N	USB 3.1 Transmit #3 Data from hub	Output
18	USBSS_TX_P	168	HUB_SSTX3_P		
<p>Note:</p> <ol style="list-style-type: none"> The module pin names not directly connected to the USB connector pins but are routed to the input of the USB hub. In the Type/Dir column, Output is to USB connectors. Input is from USB connectors. Bidir is for bidirectional signals. 					

USB 3.0 Type A - J4:

Pin #	Module Pin Name ¹	Module Pin #	Net Name	Usage/Description	Type/Dir ²
USB 3.0 Type A (2)					
1	–	–	–	VBUS Supply	Power
2	USB1_D_N	115	HUB_HSD2_N	USB 2.0 #2 Data from hub	Bidir
3	USB1_D_P	117	HUB_HSD2_P		
4	–	–	–	Ground	Ground
5	USBSS_RX_N	161	HUB_SSRX2_N	USB 3.1 Receive #2 Data from hub	Input
6	USBSS_RX_P	163	HUB_SSRX2_P		
7	–	–	–	Ground	Ground
8	USBSS_TX_N	166	HUB_SSTX2_N	USB 3.1 Transmit #2 Data from hub	Output
9	USBSS_TX_P	168	HUB_SSTX2_P		
USB 3.0 Type A (1)					
10	–	–	–	VBUS Supply	Power
11	USB1_D_N	115	HUB_HSD1_N	USB 2.0 Data #1 Data from hub	Bidir
12	USB1_D_P	117	HUB_HSD1_P		
13	–	–	–	Ground	Ground
14	USBSS_RX_N	161	HUB_SSRX1_N	USB 3.1 Receive #1 Data from hub	Input
15	USBSS_RX_P	163	HUB_SSRX1_P		
16	–	–	–	Ground	Ground
17	USBSS_TX_N	166	HUB_SSTX1_N	USB 3.0 Transmit #1 Data from hub	Output
18	USBSS_TX_P	168	HUB_SSTX1_P		

Note:

1. The module pin names not directly connected to the USB connector pins but are routed to the input of the USB hub.
2. In the Type/Dir column, Output is to USB connectors. Inputs from USB connectors. Bidir is for bidirectional signals.

Gigabit Ethernet - J6

Pin #	Module Pin Name	Module Pin #	Net Name	Usage/Description	Type/Dir
1	GBE_MDIO_P	186	GBE_MDIO_P	Gigabit Ethernet MDI 0+	Bidir
2	GBE_MDIO_N	184	GBE_MDIO_N	Gigabit Ethernet MDI 0-	Bidir
3	GBE_MDII_P	192	GBE_MDII_P	Gigabit Ethernet MDI 1+	Bidir
4	-	-	-	MCT	-
5	-	-	-	MCT	-
6	GBE_MDII_N	190	GBE_MDII_N	Gigabit Ethernet MDI 1-	Bidir
7	GBE_MDI2_P	198	GBE_MDI2_P	Gigabit Ethernet MDI 2+	Bidir
8	GBE_MDI2_N	196	GBE_MDI2_N	Gigabit Ethernet MDI 2-	Bidir
9	GBE_MDI3_P	204	GBE_MDI3_P	Gigabit Ethernet MDI 3+	Bidir
10	GBE_MDI3_N	202	GBE_MDI3_N	Gigabit Ethernet MDI 3-	Bidir
11	-	-	-	Power-Over-Ethernet	Power
12					
13					
14					
15	-	-	-	Green LED Anode	Input
16	GBE_LED_LINK	188	GBE_LED_LINK	Green LED Cathode. On for 1000Mbps link. Off for 10/100Mbps.	Output
17	-	-	-	Yellow LED Anode	Input
18	GBE_LED_ACT	194	GBE_LED_ACT	Yellow LED Cathode. On indicates activity.	Output
19	-	-	-	Shield Ground	Ground
20					

Note:

In the Type/Dir column, Output is to RJ45 connector. Input is from RJ45 connector. Bidir is for bidirectional signals.

HDMI - J5A

Pin #	Module Pin Name	Module Pin #	Net Name	Usage/Description	Type/Dir
1	DPI_TXD0_P	65	HDMI_TXD2_P	HDMI Transmit Data 2+	Output
2	-	-		Ground	Ground
3	DPI_TXD0_N	63	HDMI_TXD2_N	HDMI Transmit Data 2-	Output
4	DPI_TXD1_P	71	HDMI_TXD1_P	HDMI Transmit Data 1+	Output
5	-	-		Ground	Ground
6	DPI_TXD1_N	69	HDMI_TXD1_N	HDMI Transmit Data 1-	Output
7	DPI_TXD2_P	77	HDMI_TXD0_P	HDMI Transmit Data 0+	Output
8	-	-		Ground	Ground
9	DPI_TXD2_N	75	HDMI_TXD0_N	HDMI Transmit Data 0-	Output
10	DPI_TXD3_P	83	HDMI_TXC_P	HDMI Transmit Clock+	Output
11	-	-		Ground	Ground
12	DPI_TXD3_N	81	HDMI_TXC_N	HDMI Transmit Clock-	Output
13	HDMI_CEC	94	HDMI_CEC	HDMI CEC	Bidir
14	-	-		Unused	Unused
15	DPI_AUX_P	100	HDMI_DDC_SCL	HDMI DDC Clock	Output /OD
16	DPI_AUX_N	98	HDMI_DDC_SDA	HDMI DDC Data	Bidir/OD
17	-	-		Ground	Ground
18	-	-		HDMI 5V Power	Power
19	DPI_HPD	96	HDMI_HPD	HDMI Hot Plug Detect	Input

Note:

In the Type/Dir column, Output is to HDMI connector. Input is from HDMI connector. Bidir is for bidirectional signals.

DP - J5B

Pin #	Module Pin Name	Module Pin #	Net Name	Usage/Description	Type/Dir
1	DP0_TXD0_P	41	DP0_TXD0_P	DP Lane 0+	Output
2	-	-		Ground	Ground
3	DP0_TXD0_N	39	DP0_TXD0_N	DP Lane 0-	Output
4	DP0_TXD1_P	47	DP0_TXD1_P	DP Lane 1+	Output
5	-	-		Ground	Ground
6	DP0_TXD1_N	45	DP0_TXD1_N	DP Lane 1-	Output
7	DP0_TXD2_P	53	DP0_TXD2_P	DP Lane 2+	Output
8	-	-		Ground	Ground
9	DP0_TXD2_N	51	DP0_TXD2_N	DP Lane 2-	Output
10	DP0_TXD3_P	59	DP0_TXD3_P	DP Lane 3+	Output
11	-	-		Ground	Ground
12	DP0_TXD3_N	57	DP0_TXD3_N	DP Lane 3-	Output
13	-	-		MODE: Selects between D P and TMDS (DVI/HDMI) signaling.	Unused
14	-	-		CEC_DP: Not used – pulled to GND through 1Mohm resistor	Unused
15	DP0_AUX_N	90	DP0_AUX_N	DisplayPort Auxiliary Channel 0-	Bidir
16	-	-		Ground	Ground
17	DP0_AUX_P	92	DP0_AUX_P	DisplayPort Auxiliary Channel 0+	Bidir
18	DP0_HPD	88	DP0_HPD	HDMI Hot Plug Detect	Input
19	-	-		Power Return (Ground)	Ground
20	-	-		+3.3V	Power

Note:

In the Type/Dir column, Output is to DP connector. Input is from DP connector. Bidir is for bidirectional signals.

M.2 Key M Expansion Slot -J18

Pin #	Module Pin Name	Module Pin #	Usage/Description	Type/Dir Default
1	-	-	Ground	Ground
3				
5	PCIE0_RX3_N	155	PCIe IF #0 Lane 3 Receive	Input
7	PCIE0_RX3_P	157		
9	-	-	Ground	Ground
11	PCIE0_TX3_N	154	PCIe IF #0 Lane 3 Transmit	Output
13	PCIE0_TX3_P	156		
15	-	-	Ground	Ground
17	PCIE0_RX2_N	149	PCIe IF #0 Lane 2 Receive	Input
19	PCIE0_RX2_P	151		
21	-	-	Ground	Ground
23	PCIE0_TX2_N	148	PCIe IF #0 Lane 2 Transmit	Output
25	PCIE0_TX2_P	150		
27	-	-	Ground	Ground
29	PCIE0_RX1_N	137	PCIe IF #0 Lane 1 Receive	Input
31	PCIE0_RX1_P	139		
33	-	-	Ground	Ground
35	PCIE0_TX1_N	140	PCIe IF #0 Lane 1 Transmit	Output
37	PCIE0_TX1_P	142		
39	-	-	Ground	Ground
41	PCIE0_RX0_N	131	PCIe IF #0 Lane 0 Receive	Input
43	PCIE0_RX0_P	133		
45	-	-	Ground	Ground
47	PCIE0_TX0_N	134	PCIe IF #0 Lane 0 Transmit	Output
49	PCIE0_TX0_P	136		
51	-	-	Ground	Ground
53	PCIE0_CLK_N	160	PCIe IF #0 Reference Clock	Output
55	PCIE0_CLK_P	162		
57	-	-	Ground	Ground
59	-	-	Unused (Key)	Unused
61				
63				
65				
67	-	-	Unused	Unused
69	-	-	Unused	Unused
71	-	-	Ground	Ground
73				
75				

Pin #	Module Pin Name	Module Pin #	Usage/Description	Type/Dir Default
2	-	-	Main 3.3V Supply	Power
4				
6				
8				
10	-	-	Unused	Unused
12				
14				
16				
18	-	-	Main 3.3V Supply	Power
20				
22				
24				
26	-	-	Unused	Unused
28				
30				
32				
34				
36				
38				
40				
42	I2C2_SDA	234		
44	SDMMC_DAT1	221	M.2 Key M Alert	Output, 1.8V
46	-	-	Unused	Unused
48				
50	PCIE0_RST*	181	PCIe IF #0 Reset	Output, 3.3V
52	PCIE0_CLKREQ*	180	PCIe IF #0 Clock Request	Input, 3.3V
54	PCIE_WAKE*	179	PCIe Wake (Level Shifted from 3.3V to 1.8V)	Input, 3.3V
56	-	-	Unused	Unused
58				
60				
62	-	-	Unused (Key)	Unused
64				
66				
68				
68	-	-	32KHz Suspend Clock	Output, 3.3V
70	-	-	Main 3.3V Supply	Power
72				
74				
<p>Note: In the Type/Dir column, Output is to M.2 module. Input is from M.2 Module. Bidir is for bidirectional signals.</p>				

CSI - J12

Pin #	Module Pin Name	Usage/Description	Type/Dir
1	-	Ground	Ground
2	CSI0_D0_N	CSI 0 Data 0	Input
3	CSI0_D0_P		
4	-	Ground	Ground
5	CSI0_D1_N	CSI 0 Data 1	Input
6	CSI0_D1_P		
7	-	Ground	Ground
8	CSI0_CLK_N	CSI 0 Clock	Input
9	CSI0_CLK_P		
10	-	Ground	Ground
11	CAM0_PWDN	Camera #0 Power-down	Output
12	CAM0_MCLK	Camera #0 Master Clock	Output
13	CAM0_I2C_SCL	Camera I2C. 2.2kΩ pull-ups on module. 2.2kΩ pull-ups on the carrier board. The module CAM_I2C pins connect to an I2C mux. The camera connector #1 receives the I2C from the mux (1st output).The I2C signals on the camera side of the mux have 47k Ω pull-ups.	Output
14	CAM0_I2C_SDA		Bidir
15	-	+3.3V	Power
16	-	Not Used	-
17	-		
18	-		
19	-		
20	-		
21	-		
22	-		
23	-		
24	-		
25	-		
26	-		
27	-		
28	-		
29	-		
30	-		

CSI - J9

Pin #	Module Pin Name	Usage/Description	Type/Dir
1	–	Ground	Ground
2	CSI2_D0_N	CSI 2 Data 0	Input
3	CSI2_D0_P		
4	–	Ground	Ground
5	CSI2_D1_N	CSI 2 Data 1	Input
6	CSI2_D1_P		
7	–	Ground	Ground
8	CSI2_CLK_N	CSI 2 Clock	Input
9	CSI2_CLK_P		
10	–	Ground	Ground
11	CAM1_PWDN	Camera #1 Power-down	Output
12	CAM1_MCLK	Camera #1 Master Clock	Output
13	CAM1_I2C_SCL	Camera I2C. 2.2kΩ pull-ups on module. 2.2kΩ pull-ups on the carrier board. The module CAM_I2C pins connect to an I2C mux. The camera connector #1 receives the I2C from the mux (2nd output).The I2C signals on the camera side of the mux have 47kΩ pull-ups.	Output
14	CAM1_I2C_SDA		Bidir
15	–	+3.3V	Power
16	–	Not Used	–
17	–		
18	–		
19	–		
20	–		
21	–		
22	–		
23	–		
24	–		
25	–		
26	–		
27	–		
28	–		
29	–		
30	–		

40 Pin Expansion Header - J10

Header Pin #	Module Pin Name	Module Pin #	SoC Pin name	Default Usage / Description	Alternate Functionality
1	-	-	-	Main 3.3V Supply	-
2	-	-	-	Main 5.0V Supply	-
3	I2C1_SDA	191	DP_AUX_CH3_N	I2C #1 Data	-
4	-	-	-	Main 5.0V Supply	-
5	I2C1_SCL	189	DP_AUX_CH3_P	I2C #1 Clock	-
6	-	-	-	Ground	-
7	GPIO09	211	AUD_MCLK	GPIO	Audio Master Clock
8	UART1_TXD	203	UART1_TX	UART #1 Transmit	GPIO
9	-	-	-	Ground	-
10	UART1_RXD	205	UART1_RX	UART #1 Receive	GPIO
	UART1_RTS*	207	UART1_RTS	GPIO	UART #2 Request to Send
12	I2S0_SCLK	199	DAP5_SCLK	GPIO	Audio I2S #0 Clock
13	SPI1_SCK	106	SPI3_SCK	GPIO	SPI #1 Shift Clock
14	-	-	-	Ground	-
15	GPIO12	218	TOUCH_CLK	GPIO	-
16	SPI1_CS1*	112	SPI3_CS1	GPIO	SPI #1 Chip Select #1
17	-	-	-	Main 3.3V Supply	-
18	SPI1_CS10*	110	SPI3_CS0	GPIO	SPI #0 Chip Select #0
19	SPI0_MOSI	89	SPI1_MOSI	GPIO	SPI #0 Master Out/Slave In
20	-	-	-	Ground	-
21	SPI0_MISO	93	SPI1_MISO	GPIO	SPI #0 Master In/Slave Out
22	SPI1_MISO	108	SPI3_MISO	GPIO	SPI #1 Master In/Slave Out
23	SPI0_SCK	91	SPI1_SCK	GPIO	SPI #0 Shift Clock
24	SPI0_CS0*	95	SPI1_CS0	GPIO	SPI #0 Chip Select #0
25	-	-	-	Ground	-
26	SPI0_CS1*	97	SPI1_CS1	GPIO	SPI #0 Chip Select #1
27	I2C0_SDA	187	GEN2_I2C_SDA	I2C #0 Data	GPIO
28	I2C0_SCL	185	GEN2_I2C_SCL	I2C #0 Clock	GPIO
29	GPIO01	118	SOC_GPIO41	GPIO	General Purpose Clock #0
30	-	-	-	Ground	-
31	GPIO11	216	SOC_GPIO42	GPIO	General Purpose Clock #1
32	GPIO07	206	SOC_GPIO44	GPIO	PWM
33	GPIO13	228	SOC_GPIO54	GPIO	PWM
34	-	-	-	Ground	-
35	I2S0_FS	197	DAP5_FS	GPIO	Audio I2S #0 Field Select
36	UART1_CTS*	209	UART1_CTS	GPIO	UART #1 Clear to Send
37	SPI1_MOSI	104	SPI3_MOSI	GPIO	SPI #1 Master Out/Slave In
38	I2S0_DIN	195	DAP5_DIN	GPIO	Audio I2S #0 Data in
39	-	-	-	Ground	-
40	I2S0_DOUT	193	DAP5_DOUT	GPIO	Audio I2S #0 Data Out

Header Pin #	Type/ Dir	Pin Drive or Power Pin Max Current	SoC GPIO Port #	Power- on Default	PU/PD on Module	Notes
1	Power (input)	1A	-	-	-	1
2	Power (input/output_	1A	-	-	-	1
3	Bidir OD	±2mA	-	z	2.2KΩ PU	2
4	Power	1A	-	-	-	-
5	Bidir OD	±2mA	-	z	2.2KΩ PU	2
6	Ground	-	-	-	-	-
7	Bidir/Output	±20uA	PS.04	pd		3
8	Output/Bidir	±20uA	PR.02	pd		3
9	Ground	-	-	-	-	-
10	Input/Bidir	±20uA	PR.03	pu		3
	Bidir/Output	±20uA	PR.04	pd		3
12	Bidir	±20uA	PT.05	pd		3
13	Bidir/Output	±20uA	PY.00	pd		3
14	Ground	-	-	-	-	-
15	Bidir	±20uA	PCC.04	pd		3
16	Bidir/Output	±20uA	PY.04	pu		3
17	Power	1A	-	-	-	1
18	Bidir/Output	±20uA	PY.03	pu		3
19	Bidir/Output	±20uA	PZ.05	pd		3
20	Ground	-	-	-	-	-
21	Bidir/Input	±20uA	PZ.04	pd		3
22	Bidir/Input	±20uA	PY.01	pd		3
23	Bidir/Output	±20uA	PZ.03	pd		3
24	Bidir/Output	±20uA	PZ.06	pu		3
25	Ground	-	-	-	-	-
26	Bidir/Output	±20uA	PZ.07	pu		3
27	Bidir OD/Bidir	±2mA	PDD.00	z	2.2KΩ PU	2
28	Bidir OD/Bidir	±2mA	PCC.07	z	2.2KΩ PU	2
29	Bidir/Output	±20uA	PQ.05	pd		3
30	Ground	-	-	-	-	-
31	Bidir/Output	±20uA	PQ.06	pd		3
32	Bidir/Output	±20uA	PR.00	pd		3
33	Bidir/Output	±20uA	PN.01	pd		3
34	Ground	-	-	-	-	-
35	Bidir	±20uA	PU.00	pd		3
36	Bidir/Input	±20uA	PR.05	pd		3
37	Bidir/Output	±20uA	PY.02	pd		3
38	Bidir/Input	±20uA	PT.07	pd		3
39	Ground	-	-	-	-	-
40	Bidir/Output	±20uA	PT.06	pd		3

Note:

1. This is current capability per power pin
2. These pins are connected to the SoC directly. They are open drain (either pulled up or driven low by the SoC when configured as outputs). The max drive that meets the data sheet VOL is $\pm 2\text{mA}$.
3. These pins connect to TI TXB0108 level translators. Due to the design of these devices, the output drivers are very weak, so they can be overdriven by another connected device output for bidirectional support.
4. In the Type/Dir column, output is to expansion header. Input is from expansion header. Bidir is for bidirectional signals.
5. Where the signal direction is input or output in this table this matches the typical special function usage (e.g. SPI, I2S, etc.). The direction is bidirectional if these are configured as GPIOs.
6. All signals on the 40-pin header are 3.3V level

Button Header - J15

Pin #	Module Pin Name	Module Pin #	Net Name	Usage/Description	Type/Dir Default
1	-	-		PC_LED- : Connects to LED Cathode to indicate System Sleep/Wake (Off when system in sleep mode)	Input, 5V
2	-	-		PC_LED+: Connects to LED Anode (see above)	Output
3	UART2_RXD (DEBUG)	238	UART2_RXD	UART #2 Receive	Input, 3.3V
4	UART2_TXD (DEBUG)	236	UART2_TXD	UART #2 Transmit	Output, 3.3V
5	-	-		AC OK: Connect pins 5 and 6 to disable Auto-Power-On and require power button press.	Input, 3.3V
6	-	-		Auto Power-on disable: Pulled to GND. See Pin 5.	na
7	-	-		Ground	Ground
8	SYS_RESET*	239	SYS_RESET	Temporarily connect pins 7 and 8 to reset system	Input, 1.8V
9	-	-		Ground	Ground
10	FORCE_RECOVERY*	214	FORCE_RECOVERY*	Connect pins 9 and 10 during power-on to put system in USB Force Recovery mode.	Input, 1.8V
11	-	-		Ground	Ground
12	SLEEP/WAKE*	240	PWR_BTN*	Connect pins 11 and 12 to initiate power-on if Auto-Power-On disabled (Pins 5 and 6 connected).	Input, 5V

Note:

In the Type/Dir column, Output is to button header. Input is from button header. Bidir is for bidirectional signals.

Fan Connector - J13

Pin #	Module Pin Name	Module Pin #	Net Name	Usage/Description	Type/Dir Default
1	-			Ground	Ground
2	-			Main 5.0V Supply	Power
3	GPIO08 (SDMMC_CD)	208	FAN_TACH	Fan Tachometer signal	Input, 5V
4	GPIO14 (PWM)	230	FAN_PWM	Fan Pulse Width Modulation signal	Output, 5V

Note:

In the Type/Dir column, Output is to fan connector. Input is from fan connector. Bidir is for bidirectional signals.

CAN Bus Header- J16

Pin #	Module Pin Name	Module Pin #	Net Name	Usage/Description	Type/Dir Default
1	CAN_TX	145	CAN_TX	CAN Bus transmit	Output, 3.3V
2	CAN_RX	143	CAN_RX	CAN Bus receive	Input, 3.3V
3	-	-	GND	Ground	Ground
4	-	-		Main 3.3V Supply	Power

Note:

In the Type/Dir column, Output is to CAN connector. Input is from CAN connector. Bidir is for bidirectional signals.

RTC-Coin Cell Batter Holder - J19

Pin #	Module Pin Name	Module Pin #	Net Name	Usage/Description	Type/Dir Default
1	-			Ground	Ground
2	PMIC_BBAT	235	BBAT	Power Management IC (PMIC) real-time clock battery back-up. Optionally used to provide back-up power for the Real-Time-Clock (RTC). Connects to coin cell (lithium or other). PMIC is supply when charging rechargeable cells. Coin cell is source when system is disconnected from power. Charging is enabled by default in software. If non-rechargeable battery is to be used, charging should be disabled.	Power

RTC-Pin Header - J14

Pin #	Module Pin Name	Module Pin #	Net Name	Usage/Description	Type/Dir Default
1	-			Ground	Ground
2	PMIC_BBAT	235	BBAT	Power Management IC (PMIC) real-time clock battery back-up. Optionally used to provide back-up power for the Real-Time-Clock (RTC). Connects to coin cell (lithium or other). PMIC is supply when charging rechargeable cells. Coin cell is source when system is disconnected from power. Charging is enabled by default in software. If non-rechargeable battery is to be used, charging should be disabled.	Power

POE - J8

Pin #	Module Pin Name	Module Pin #	Net Name	Usage/Description	Type/Dir Default
1	-	-	POE_VC1	Ethernet RG45 connector PoE VC1 power	Power
2	-	-	POE_VC2	Ethernet RG45 connector PoE VC2 power	Power
3	-	-	POE_VC3	Ethernet RG45 connector PoE VC3 power	Power
4	-	-	POE_VC4	Ethernet RG45 connector PoE VC4 power	Power


DC Jack - J2

Pin #	Module Pin Name	Module Pin #	Net Name	Usage/Description	Type/Dir Default
1	-	-	-	Main DC input supplying DC jack input (9-16V)	Power
2	-	-	-	Ground	Ground

More information


Please check our Wiki and ask question at our Forum or Discord community. For more information, you can also refer to NVIDIA official Jetson Download Center

Passive aluminium heatsink

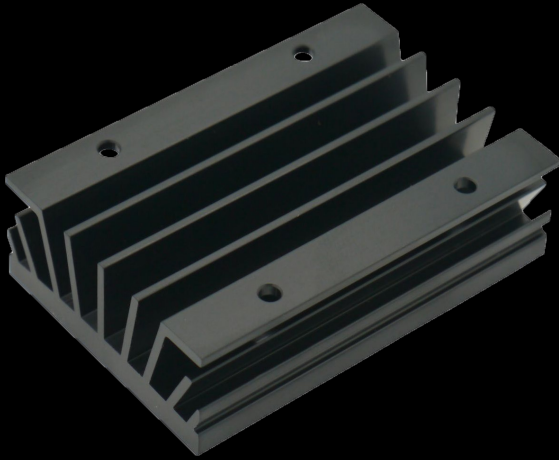

- Original NVIDIA Jetson Nano Passive Heat Sink
- Designed to fit the NVIDIA Jetson Nano modules
- Dimensions: 58.7 mm x 39.4mm x 17.3mm

reComputer Case

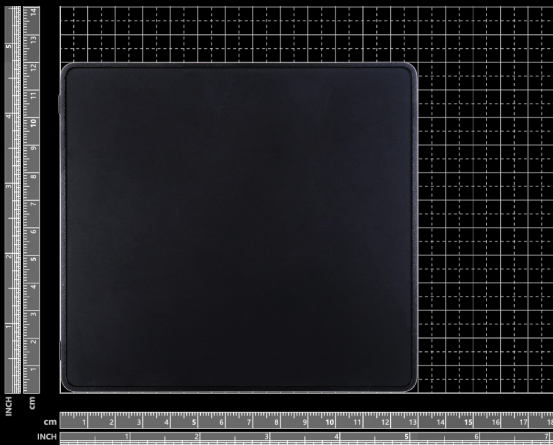

- Overall dimension: 130mm x120mm x 50mm

More information

Please check our Wiki and ask question at our Forum or Discord community. For more information, you can also refer to NVIDIA official Jetson Download Center