




Terminals & Splices > Quick Disconnects

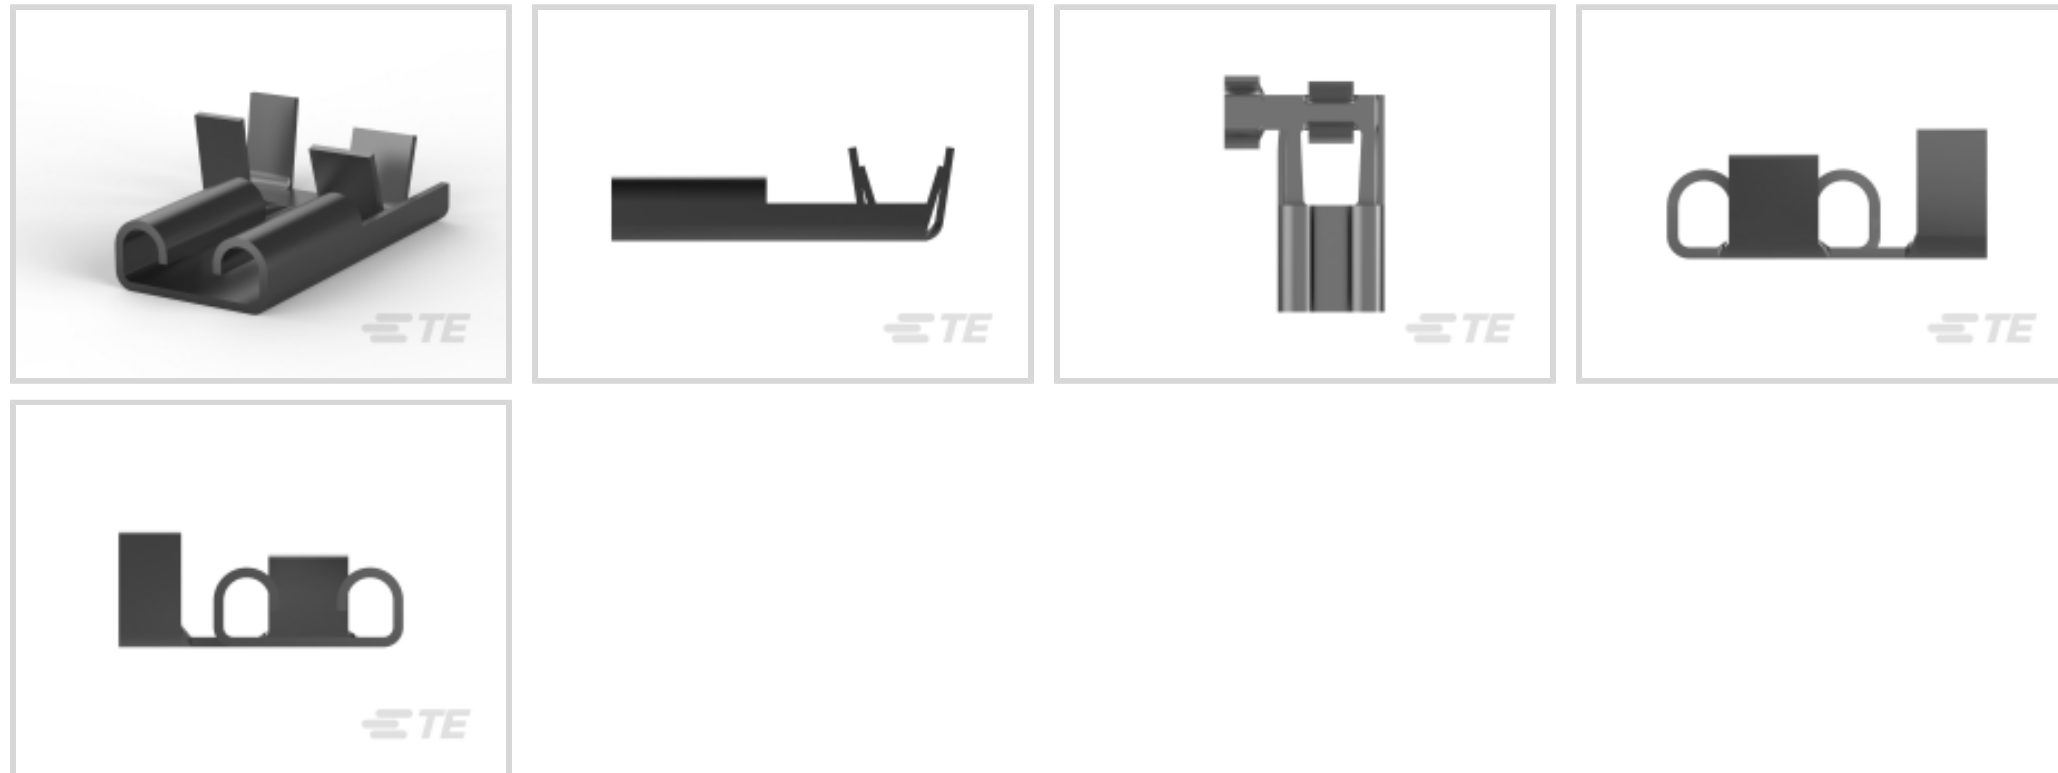

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: 1 – 2.5 mm<sup>2</sup>

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

## Features

### Product Type Features

Terminates To	Wire & Cable
Wire Stop	No
Wire/Cable Type	Regular Wire
Insertion Force	Low
Sealable	No

### Configuration Features

Connection Capacity	Single
---------------------	--------

### Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm [.25 in]
Mating Tab Thickness	.81 mm [.032 in]
Terminal Orientation	Flag
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	Tab-Lok



Barrel Type	Open
-------------	------

### Mechanical Attachment

Mating Retention Type	Dimple
-----------------------	--------

Wire Insulation Support	With
-------------------------	------

### Dimensions

Accepts Wire Insulation Diameter Range	2.5 – 3.81 mm [.098 – .15 in]
--	-------------------------------

Overall Length	16.6 mm [.653 in]
----------------	-------------------

Wire Size	1 – 2.5 mm <sup>2</sup>
-----------	-------------------------

### Usage Conditions

Insulation Requirement	Uninsulated
------------------------	-------------

Operating Temperature Range	-40 – 110 °C [-40 – 230 °F]
-----------------------------	-----------------------------

### Industry Standards

UL Rating	Listed
-----------	--------

### Packaging Features

Packaging Quantity	500
--------------------	-----

Packaging Method	Loose Piece/Carton
------------------	--------------------

### Other

Line	Premier
------	---------

Comment	Versions according DIN 46346
---------	------------------------------

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: Not Yet Reviewed
--	---

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts




TE Part # 180319  
DAHT FLAG FASTON/FASTIN-ON 18-14 ASSY




TE Part # 151791-2  
FASTON 375 REC FLAG 12-10 AWG TPBR LP


### Also in the Series | FASTON 250

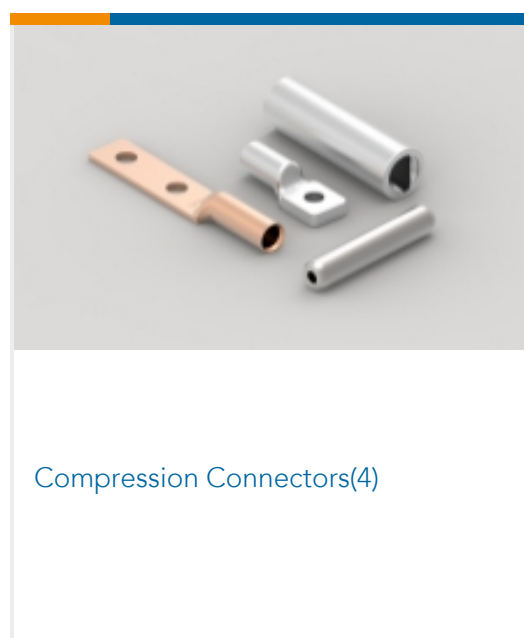

Compression Connectors(4)

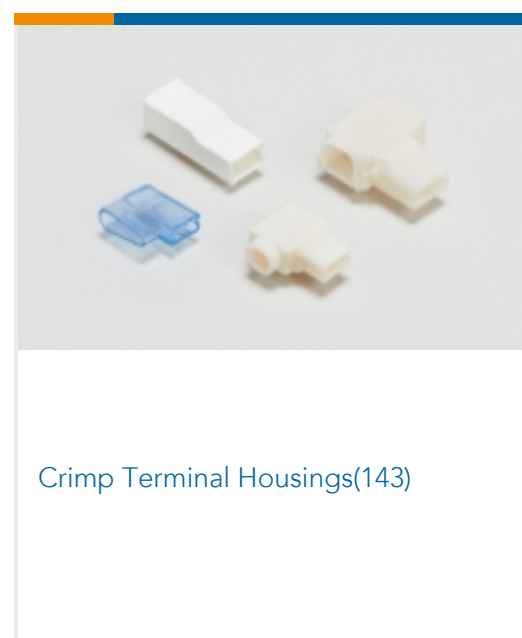


Crimp Terminal Housings(143)

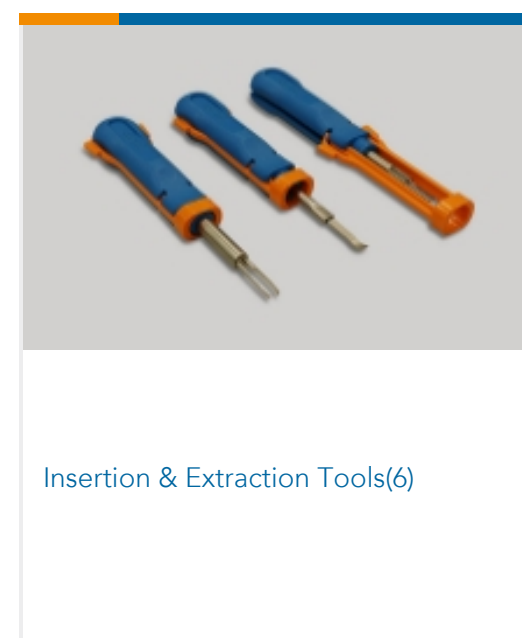


Insertion & Extraction Tools(6)



Magnet Wire Terminals(1)

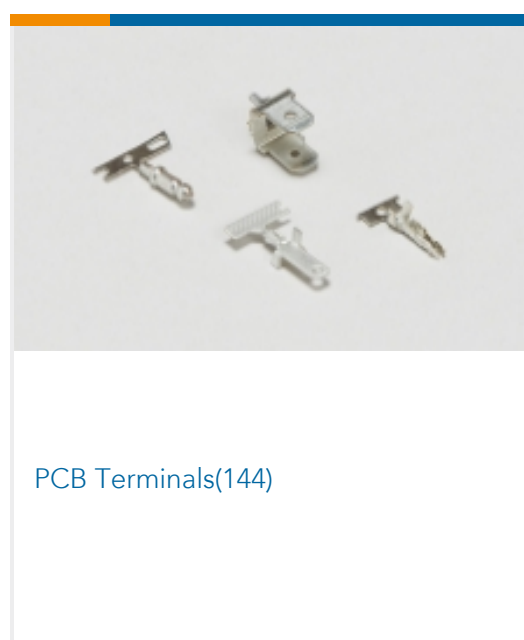

PCB Terminals(144)

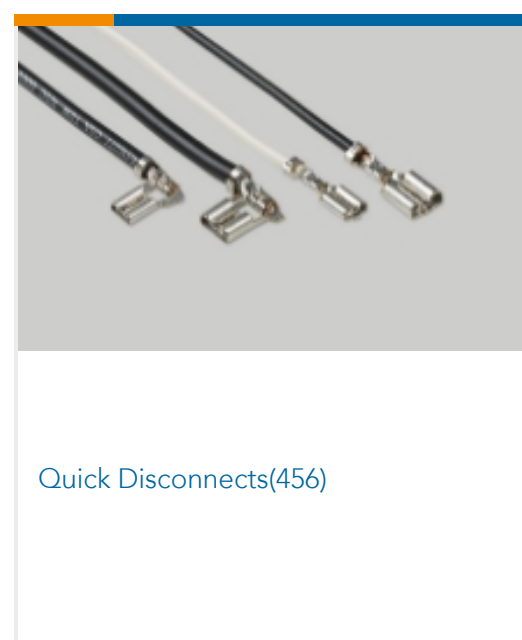

Quick Disconnects(456)



Splices(4)

### Customers Also Bought



TE Part #170891-2  
250 FASTON HSG., FLAG, REC.,  
NATRUAL



TE Part #2176397-9  
3502 2R2 1%



TE Part #1761607-7  
IDC LOW PRO HDR 20P RA LG LAT



TE Part #342104-1  
22-16 F.E.P.G. RING TONGUE '0BA'



TE Part #7-180984-5  
250 FASTON BOOT FLAG REC. 1P  
BLACK



TE Part #42801-2  
187 FASTON REC 20-16 AWG TPBR



TE Part #ZPF000000000000368  
006-0937-20 A



TE Part #5-2176365-2  
RQ 0603 137R 0.1% 10PPM 1K RL

## Documents

### Product Drawings

250 FASTON, FLAG, REC., 17-14 AWG, TPBR

English

### CAD Files

3D PDF

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_180429-2\\_K\\_c-180429-2-k.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_180429-2\\_K\\_c-180429-2-k.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_180429-2\\_K\\_c-180429-2-k.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Product Specifications

FASTON & FASTIN-FASTON conn. .250 srs. flag rec. etc.

[Application Specification](#)

### Product Environmental Compliance

[MD\\_180429-2\\_033020181417\\_dmtec](#)

English

[MD\\_180429-2\\_033020181417\\_dmtec](#)

English



[Agency Approvals](#)

[Agency Approval Document](#)

English