

Antenna - ANT-OMNI-5900-01



2701347

<https://www.phoenixcontact.com/pc/products/2701347>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

Omnidirectional antenna, 5 GHz, gain: 5 dBi, polarization: linear, opening angle: h/v 360°/25°, degree of protection: IP64, connection: N (female), incl. mounting bracket and mast clips



Your advantages

- Resistant to salt water

Commercial Data

Item number	2701347
Packing unit	1 pc
Minimum order quantity	1 pc
Product Key	DNN2Z1
Catalog Page	Page 389 (C-6-2019)
GTIN	4046356739399
Weight per Piece (including packing)	270.9 g
Weight per Piece (excluding packing)	270 g
Customs tariff number	85177100
Country of origin	PL

Technical Data

Product properties

Product type	Antenna
Gain	5 dBi
Vertical beamwidth	25 °
Horizontal beamwidth	360 °
Polarization	Linear vertical

Electrical properties

Frequency band	5 GHz
Frequency range	5.15 GHz ... 5.83 GHz
Impedance	50 Ω
Maximum capacity	6.00 W

Connection data

Connection technology

Connection method	N (female)
Outside diameter	25 mm ... 100 mm (Mast)

Dimensions

Height	130 mm
Diameter	16 mm

External dimensions

Outside diameter	25 mm ... 100 mm (Mast)
------------------	-------------------------

Material specifications

Material	Fiberglass-reinforced plastic (Radom)
	V2A (Bracket)
	V2A (Mast clamp)
Flammability rating according to UL 94	HB

Cable / line

Connecting cable	No
Other resistance	salt water resistant

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP64
Ambient temperature (operation)	-45 °C ... 70 °C
Ambient temperature (storage/transport)	-45 °C ... 70 °C
Wind velocity	220 km/h

Antenna - ANT-OMNI-5900-01



2701347

<https://www.phoenixcontact.com/pc/products/2701347>

Approval data

Electronic devices in rail vehicles

Shock (operation)	IEC 60721-3-4, 4M5
-------------------	--------------------

Standards and regulations


Other resistance	salt water resistant
------------------	----------------------

Mounting

Mounting type	Wall mounting
	Mast mounting
Assembly instructions	Outdoors and indoors

Drawings

Schematic diagram

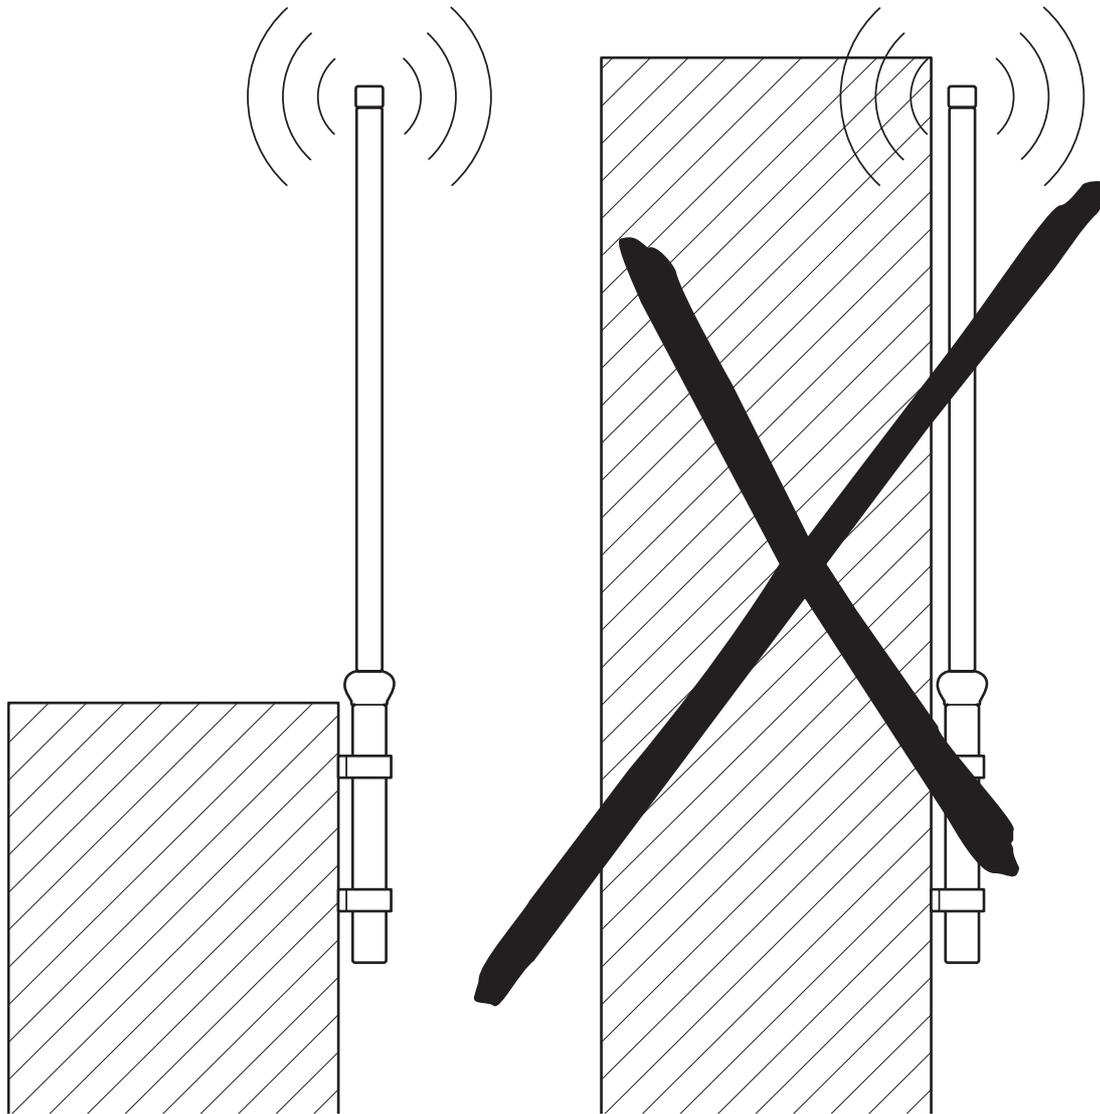

Mounting


Antenna - ANT-OMNI-5900-01

2701347

<https://www.phoenixcontact.com/pc/products/2701347>



Schematic diagram

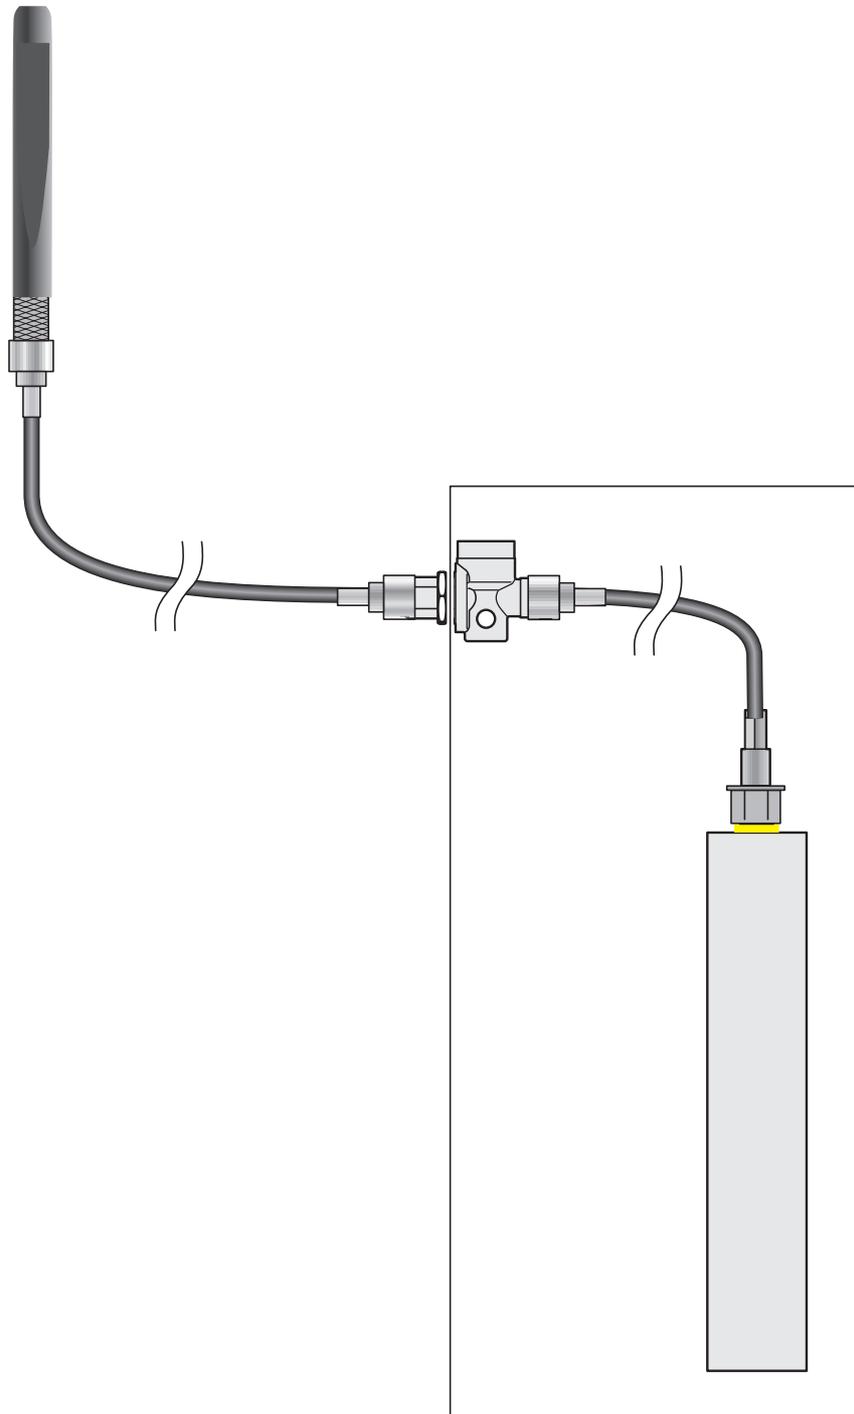

Installation example

Antenna - ANT-OMNI-5900-01



2701347

<https://www.phoenixcontact.com/pc/products/2701347>

Classifications

ECLASS

ECLASS-9.0	19070105
ECLASS-10.0.1	19070105
ECLASS-11.0	19070105

ETIM

ETIM 8.0	EC001698
----------	----------

UNSPSC

UNSPSC 21.0	43223100
-------------	----------

Antenna - ANT-OMNI-5900-01



2701347

<https://www.phoenixcontact.com/pc/products/2701347>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 25; For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2022 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com