

3RT2025-1BB40 CONTACTOR,AC3:7,5KW 1NO+1NC DC24V

Technical / CAx data

Technical Data CAx data



CONTACTOR, AC-3, 7.5KW/400V, 1NO+1NC, DC 24V, 3-POLE, SZ S0 SCREW TERMINAL

General technical data:

product brand name		SIRIUS
Size of the contactor		S0
Product extension / auxiliary switch		Yes
Protection class IP / on the front		IP20
Protection against electrical shock		finger-safe
Degree of pollution		3
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature / during storage	°C	-55...+80
Ambient temperature / during operating	°C	-25...+60
Shock resistance		
• at rectangular impulse		
• at DC		10g / 5 ms, 7,5g / 10 ms
• at sine pulse		
• at DC		15g / 5 ms, 10g / 10 ms
Impulse voltage resistance / rated value	kV	6
Insulation voltage / rated value	V	690
Mechanical operating cycles as operating time		
• of the contactor / typical		10,000,000
• of the contactor with added auxiliary switch block / typical		10,000,000
• of the contactor with added electronics-compatible auxiliary switch block / typical		5,000,000

Main circuit:

Number of NC contacts / for main contacts		0
Number of NO contacts / for main contacts		3

Operating current

- at AC-1 / at 400 V
 - at 40 °C ambient temperature / rated value A 40
 - at 60 °C ambient temperature / rated value A 35
- at AC-2 / at 400 V / rated value A 17
- at AC-3 / at 400 V / rated value A 17
- at AC-4 / at 400 V / rated value A 15.5

Operating current

- with 1 current path / at DC-1
 - at 24 V / rated value A 35
 - at 110 V / rated value A 4.5
- with 2 current paths in series / at DC-1
 - at 24 V / rated value A 35
 - at 110 V / rated value A 35
- with 3 current paths in series / at DC-1
 - at 24 V / rated value A 35
 - at 110 V / rated value A 35
- with 1 current path / at DC-3 / at DC-5
 - at 24 V / rated value A 20
 - at 110 V / rated value A 2.5
- with 2 current paths in series / at DC-3 / at DC-5
 - at 24 V / rated value A 35
 - at 110 V / rated value A 15
- with 3 current paths in series / at DC-3 / at DC-5
 - at 24 V / rated value A 35
 - at 110 V / rated value A 35

Service power

- at AC-2 / at 400 V / rated value kW 7.5
- at AC-3 / at 400 V / rated value kW 7.5
- at AC-4 / at 400 V / rated value kW 7.5

Active power loss / per conductor / typical

W 0.9

Off-load operating frequency

- at AC 1/h 5,000
- at DC 1/h 1,500

Frequency of operation / at AC-1 / according to IEC 60947-6-2

1/h 1,000

Frequency of operation / at AC-2 / according to IEC 60947-6-2

1/h 1,000

Frequency of operation / at AC-3 / according to IEC 60947-6-2

1/h 1,000

Frequency of operation / at AC-4 / according to IEC 60947-6-2

1/h 300

Control circuit:

Type of voltage / of the controlled supply voltage

DC

Control supply voltage / 1

- for DC / rated value V 24

operating range factor control supply voltage rated value / of the magnet coil

- for DC 0.8...1.1

Pull-in power / of the solenoid / for DC

W 5.9

Holding power / of the solenoid / for DC

W 5.9

Closing delay

<ul style="list-style-type: none"> at DC 	ms	50...170
Opening delay		
<ul style="list-style-type: none"> at DC 	ms	15...17.5
Arcing time	ms	10...10

Auxiliary circuit:

Contact reliability / of the auxiliary contacts		1 faulty switching per 100 million (17 V, 1 mA)
Number of NC contacts / for auxiliary contacts / instantaneous switching		1
Number of NO contacts / for auxiliary contacts / instantaneous switching		1
Operating current / of the auxiliary contacts		
<ul style="list-style-type: none"> at AC-12 / maximum 	A	10
<ul style="list-style-type: none"> at AC-15 		
<ul style="list-style-type: none"> at 230 V 	A	6
<ul style="list-style-type: none"> at 400 V 	A	3
<ul style="list-style-type: none"> at DC-12 		
<ul style="list-style-type: none"> at 48 V 	A	6
<ul style="list-style-type: none"> at 60 V 	A	6
<ul style="list-style-type: none"> at 110 V 	A	3
<ul style="list-style-type: none"> at 220 V 	A	1
<ul style="list-style-type: none"> at DC-13 		
<ul style="list-style-type: none"> at 24 V 	A	6
<ul style="list-style-type: none"> at 48 V 	A	2
<ul style="list-style-type: none"> at 60 V 	A	2
<ul style="list-style-type: none"> at 110 V 	A	1
<ul style="list-style-type: none"> at 220 V 	A	0.3

Short-circuit:

Design of the fuse link		
<ul style="list-style-type: none"> for short-circuit protection of the auxiliary switch / required 		fuse gL/gG: 10 A
<ul style="list-style-type: none"> for short-circuit protection of the main circuit 		
<ul style="list-style-type: none"> with type of assignment 1 / required 		gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 63 A
<ul style="list-style-type: none"> at type of coordination 2 / required 		gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 25A

Installation/mounting/dimensions:

Built in orientation		vertical
Type of mounting		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
Type of fixing/fixation / series installation		Yes
Width	mm	45
Height	mm	85
Depth	mm	107
Distance, to be maintained, to the ranks assembly / sideways	mm	0
Distance, to be maintained, to earthed part / sideways	mm	6

Connections:

Design of the electrical connection		
<ul style="list-style-type: none"> for main current circuit 		screw-type terminals
<ul style="list-style-type: none"> for auxiliary and control current circuit 		screw-type terminals
Type of the connectable conductor cross-section		
<ul style="list-style-type: none"> for main contacts 		
<ul style="list-style-type: none"> solid 		2x (1 ... 2.5 mm ²), 2x (2.5 ... 10 mm ²)

- finely stranded
 - with conductor end processing
- for AWG conductors / for main contacts
- for auxiliary contacts
 - solid
 - finely stranded
 - with conductor end processing
- for AWG conductors / for auxiliary contacts

2x (1 ... 2.5 mm²), 2x (2.5 ... 6 mm²), 1x 10 mm²
 2x (16 ... 12), 2x (14 ... 8)

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

2x (20 ... 16), 2x (18 ... 14)

Certificates/approvals:

General Product Approval

- CCC CSA GOST UL

Declaration of Conformity

- EC-Declarator

Test Certificates

- other Special Test Certificate Type Test Certificates/Test Report

Shipping Approval

- ABS (America) DNV / Det Norv GL / Germani LRS / Lloyds R PRS / Polski R RINA / Registr

Shipping Approval other

- RMRS / Russ Confirmation Household ar

UL/CSA ratings:

yielded mechanical performance (hp)

- for single-phase squirrel cage motors
 - at 110/120 V / rated value hp 1
 - at 230 V / rated value hp 3
- for three-phase squirrel cage motors
 - at 200/208 V / rated value hp 3
 - at 220/230 V / rated value hp 5
 - at 460/480 V / rated value hp 10
 - at 575/600 V / rated value hp 15

Operating current (FLA) / for three-phase squirrel cage motors

- at 480 V / rated value A 14
- at 600 V / rated value A 17

Contact rating designation / for auxiliary contacts / according to UL

A600 / Q600

Safety-related Parameter:

B10 value / with high demand rate

- according to SN 31920 1,000,000

T1 value / for proof test interval or service life

- according to IEC 61508 a 20

Proportion of dangerous failures

- with low demand rate / according to SN 31920 % 40
- with high demand rate / according to SN 31920 % 73

Failure rate (FIT value) / with low demand rate

- according to SN 31920 FIT 100

Product function

- mirror contact to IEC 60947-4-1 Yes

- positively driven operation to IEC 60947-5-1

No

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:



<http://www.siemens.com/cax>



Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT2025-1BB40/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT2025-1BB40

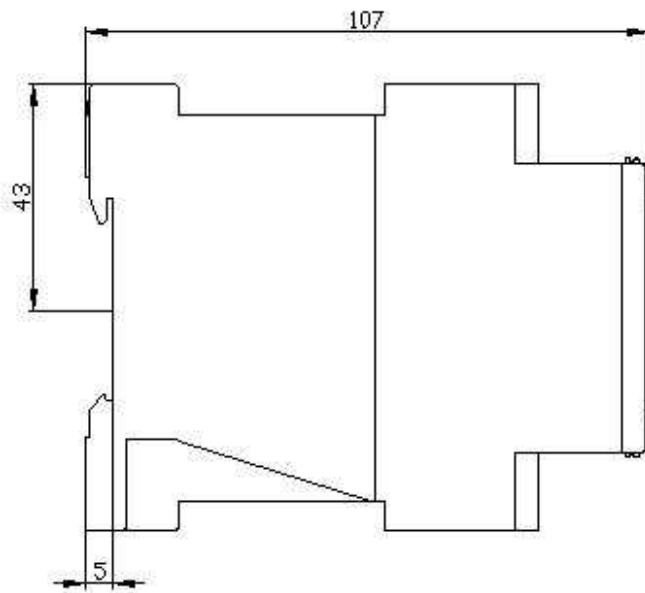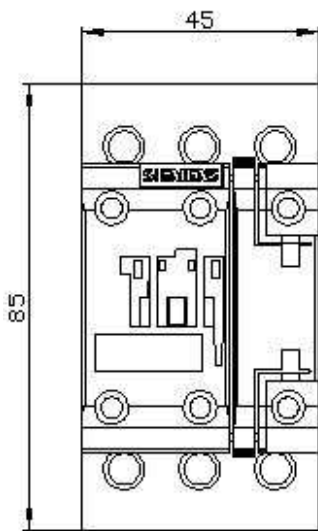

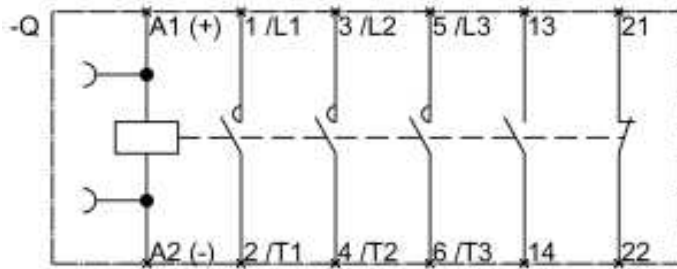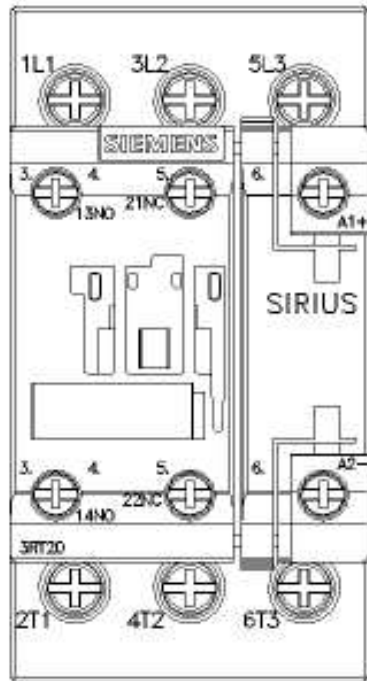

last change:

Mar 27, 2012