

FEATURES

- Foot can be snapped on TS 35 DIN rail
- Housing made from polyamide 6.6 UL 94-V0
- Screw-down termination method
- Green/Yellow
- SSL series
- Wire Size of 22 to 12AWG
- Pitch of 5.1mm
- Single level

RS PRO Earth Terminal Block, Screw Termination

RS Stock No.: 762-2534



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

Earth terminal blocks let you safely ground/earth a current in a circuit, without the need to run a wire to the main ground/earth connection on a breaker or surge protector. These blocks are similar to regular terminal blocks, with a wire connection to the base of the block in order to ground/earth the circuit.

General Specifications

Colour	Green/Yellow
Number of levels	Single
Termination method	Screw Down
Material	PA6.6 Polyamide
Screw Size	Slotted M2.5
Rail Type Compatibility	TS 35 DIN rail
Contamination Degree	3
Poles	2P
Application	Circuit boards and control panels for industrial electronics

Electrical Specifications

Rated Impulse Voltage	8kV
------------------------------	-----

Mechanical Specifications

Wire size	22AWG to 12AWG
Cable CSA	2.5mm ²
Pitch	5.1mm
Rated Wire Cross-Section	2.5mm ²
Stripping Length	10mm
Torque	0.4Nm to 0.8Nm



Operation Environment Specifications

Minimum operating temperature	-40°C
Maximum operating temperature	120°C

Approvals

Standard met	UL, EN 60 947-1
--------------	-----------------



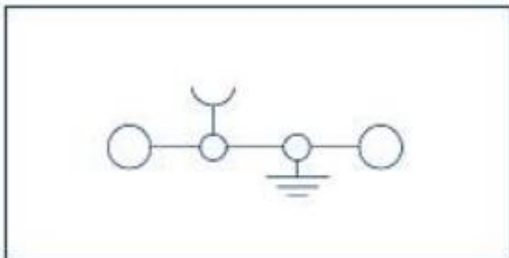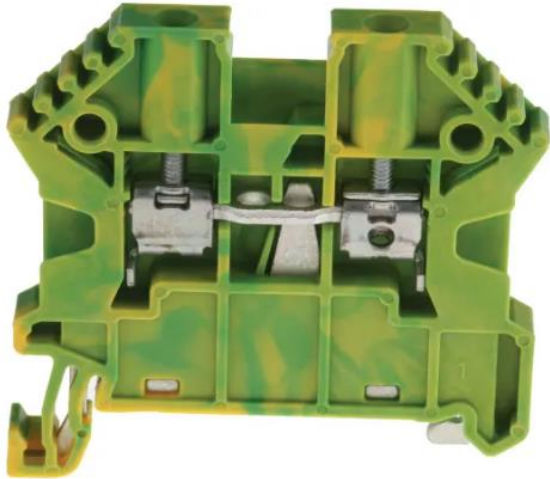

Protective earth terminal
2 connections