


Illuminated Contact Block, momentary BZLOO5K

Description:

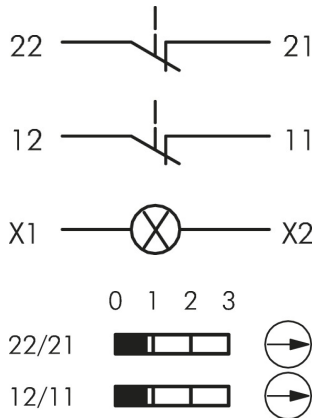

Category: Contact Blocks
 Series: Contact Blocks BZ...K
 Protection class: II (protective insulation)
 Degree of protection: IP00
 Switching function: momentary action
 Travel: 3 mm
 Illumination: Yes
 Contact equipment: 2NC
 Connection type: screw connection 2.5 mm²
 positive opening: acc. to EN60947-5-1, appendix K
 operating temperature: -30°C ... 70°C, without illumination \square -30°C ... 55°C, using incandescent lamp
 accessory type: contact block
 electrical life: 1 million operations
 storage temperature: -50°C ... 85°C
 mechanical life: 1 million switching cycles
 contact material: AgNi
 lamp socket: T5,5K