


Bild / Picture



USB 3.2 Gen 1 PCIe Karte mit 4 Ports
(VIA Chip-Set)

Anwendung / Application

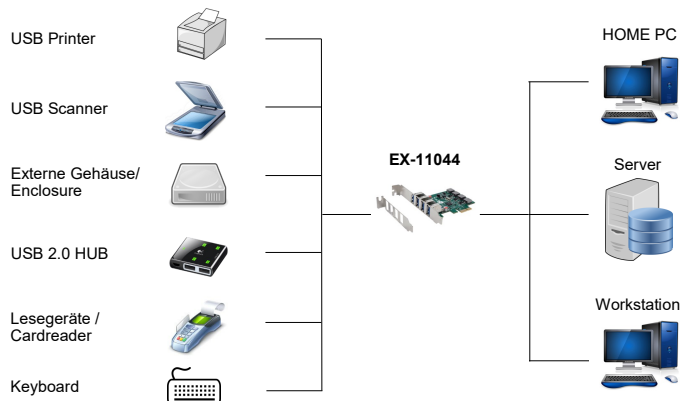

USB 3.2 Gen 1 PCIe board with 4 ports
(VIA chipset)

Beschreibung

Die EX-11044 USB 3.2 Gen 1 PCIe Karte stellt vier Externe Super-Speed USB 3.2 Gen 1 Ports zur Verfügung. Entwickelt wurde sie um mehrere USB 1.1, 2.0 oder 3.2 Gen 1 Endgeräte an Ihre Workstation, Desktop oder Server anzuschließen. Sie unterstützt USB 1.1 Low-Speed (1.5Mbps), Full-Speed (12Mbps), USB 2.0 High-Speed (480Mbps) und USB 3.2 Gen 1 Super-Speed (5Gbps). Sie ist die perfekte Technologie für Externe Speicher Gehäuse, Digitale Kameras, Webcam, Scanner und mehr.

Description

The EX-11044 USB 3.2 Gen 1 PCIe card provides four external super-speed USB 3.2 Gen 1 ports. It is designed to connect multiple USB 1.1, 2.0 or 3.2 Gen 1 end devices to your workstation, desktop or server. It supports USB 1.1 Low-Speed (1.5Mbps), Full-Speed (12Mbps), USB 2.0 High-Speed (480Mbps) and USB 3.2 Gen 1 Super-Speed (5Gbps). It is the perfect technology for External Storage Enclosures, Digital Cameras, Webcam, Scanner and more.

Merkmale

Features

<ul style="list-style-type: none"> • USB 3.2 Gen 1 PCIe Karte mit vier externen Anschlüssen 	<ul style="list-style-type: none"> • USB 3.2 Gen 1 PCIe card with vier external connectors
<ul style="list-style-type: none"> • Kompatibel zu Microsoft Windows Standard Open HCD Treiber 	<ul style="list-style-type: none"> • Compatible to Microsoft Windows Standard Open HCD Driver
<ul style="list-style-type: none"> • Unterstützt bis zu 123 Geräte 	<ul style="list-style-type: none"> • Support up to 123 devices
<ul style="list-style-type: none"> • Vollständig konform mit PCI Express Gen2 Spezifikationen 	<ul style="list-style-type: none"> • Fully Compliant with PCI Express Gen2 Specifications
<ul style="list-style-type: none"> • USB 1.1 und 2.0 abwärtskompatibel 	<ul style="list-style-type: none"> • USB 1.1 and 2.0 backward compatible
<ul style="list-style-type: none"> • Hot Swapping 	<ul style="list-style-type: none"> • Hot Swapping
<ul style="list-style-type: none"> • Plug-and-Play 	<ul style="list-style-type: none"> • Plug-and-Play

System / OS

Geprüft / Approved

Verpackung / Packaging



Spezifikation

Specification

Chip-Set:	VIA VL805	Chip-Set:	VIA VL805
Datentransfer-Rate:	Low-Speed (1.5Mbps) / Full-Speed (12Mbps) High-Speed (480Mbps) Super-Speed (5Gps)	Data transfer rate:	Low-Speed (1.5Mbps) / Full-Speed (12Mbps) High-Speed (480Mbps) Super-Speed (5Gps)
Anschlüsse:	4x Externe USB 3.2 Gen 1 A-Buchse	Connectors:	4x External USB 3.2 Gen 1 A-female
Hardwaresysteme:	PCIe x1 bis x16 Slot	Hardware system:	PCIe x1 up to x16 slot
Benötigt Treiber für:	Win 7 / Sever 2003 und Server 2008R2	Need driver for:	Win 7 / Sever 2003 and Server 2008R2
Betriebssysteme:	Windows 7 / 8.x / 10 / 11 / Server 20xx Linux	Operating systems:	Windows 7 / 8.x / 10 / 11 / Server 20xx Linux
Betriebstemperatur :	0°C bis +55°C	Operating temperature :	32°F up to 131°F
Lagertemperatur:	-20°C bis +85°C	Storage temperature:	-20°F up to 167°F
Rel. Luftfeuchtigkeit:	5% bis 95%	Rel. Humidity:	5% to 95%
Abmessung:	85.00 x 65.00 mm	Size:	85.00 x 65.00 mm
Gewicht:	129 g	Weight:	129 g
EAN:	4718359110443	EAN:	4718359110443
Ursprungsland:	China	Country of origin:	China
Lieferumfang:	EX-11044, Low Profile Bügel, Treiber CD, Handbuch	Packaging contents:	EX-11044, Low Profile bracket, Driver CD, Manual

Bilder / Pictures

