

SLEEVE CORES

Cylindrical EMI suppression ferrites provide a cost effective means of reducing common and differential mode EMI.

FEATURES:

Employ High-Performance ferrites with superior frequency characteristics


Compact and high performance

Easy installation

APPLICATIONS:

Countermeasures against radiated emissions, for full compliance with FCC regulations and VCCI

Improvement of noise immunity of personal computers, microcomputers, peripheral and relative devices

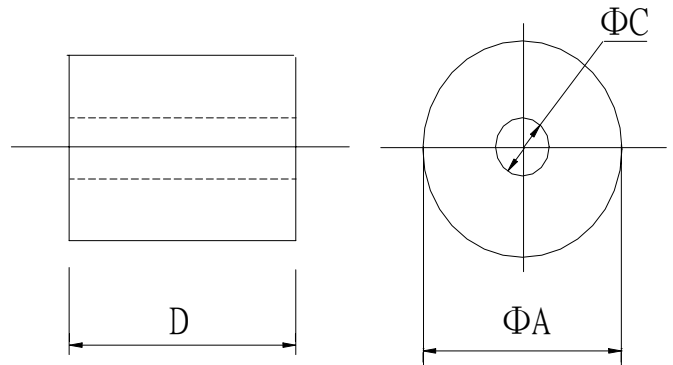


SPECIFICATION:

Frequency	@ 100 MHz
For cable size	$\varnothing \leq 4.5$ mm
A	9.3 mm
C	4.5 mm
D	9.5 mm
Impedance @ 100 MHz	78 Ω
Impedance @ 25 MHz	30 Ω

Art. Nr.

RND 165-00181

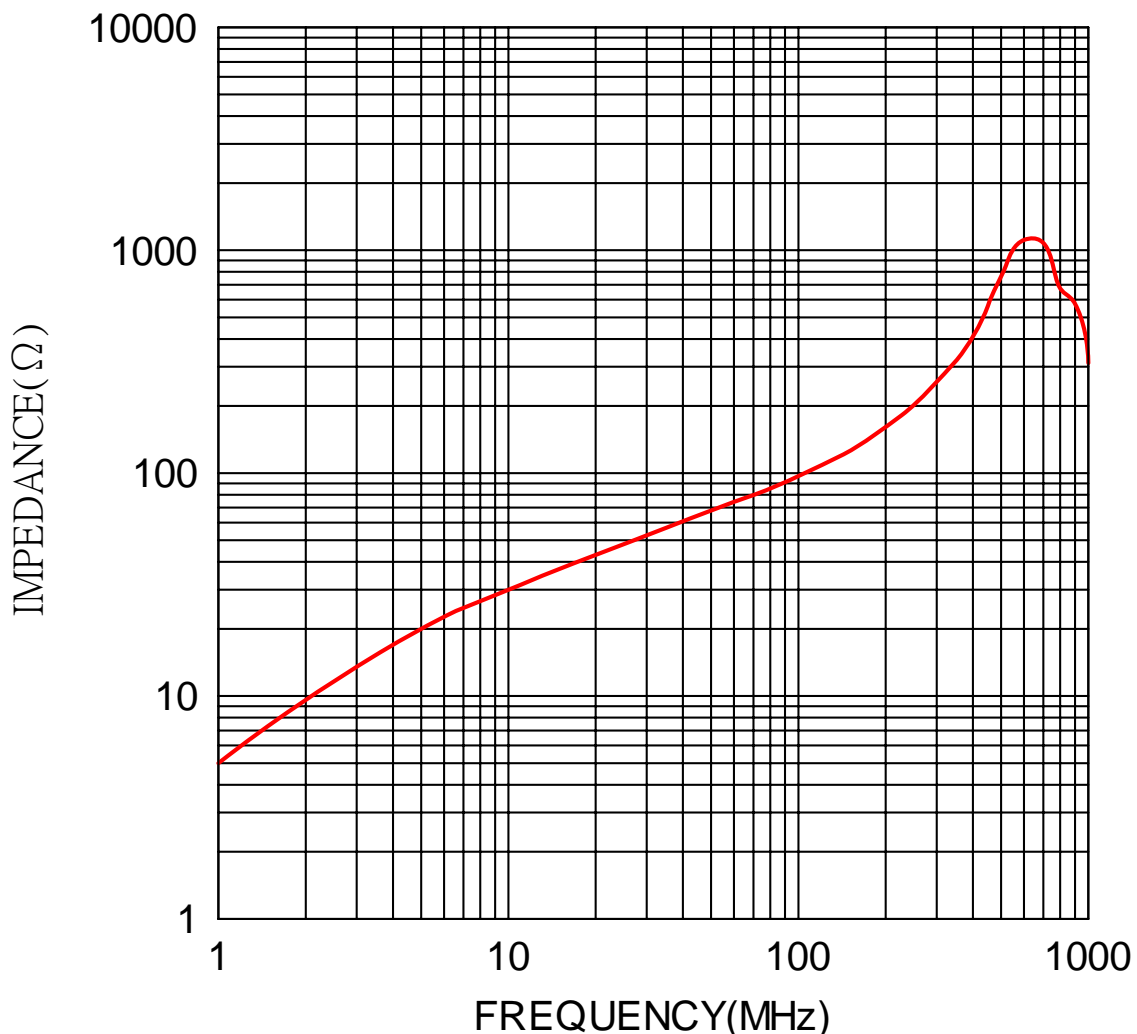

	1	5	10	25	50	100	200	300	400	500	600	700	800	900	1000
Z —	5	20	30	48	68	97	161	257	410	762	1112	1077	675	575	312

(DATA BETWEEN 500MHZ AND 1000MHZ ARE FOR REFERENCE ONLY)