


MCX JACK FOR PCB CONNECTOR



Features

- The MCX (Micro Coaxial) jack is a miniature RF connector designed for applications where space is limited
- The MCX jack features solderable pins or pads that allow for easy attachment during the PCB manufacturing process
- MCX connectors are commonly used in applications requiring moderate RF performance in the range of frequencies

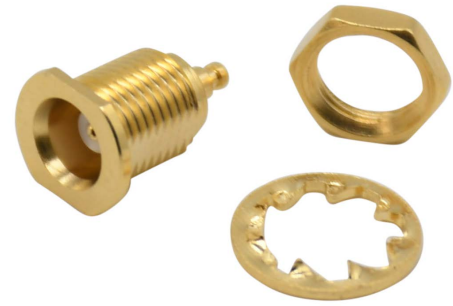



Specification

Impedance	50 Ohm
Frequency Range	0 ... 6 GHz
VSWR	1.3 max
Working Voltage	250V RMS @ Sea Level
Insulation Resistance	5 GOhm min.
Temperature Range	-55... 155 °C

Material Specification

Body	Brass, Gold Plated
Insulator	PTFE
Center Pin	Brass, Gold Plated

Drawing

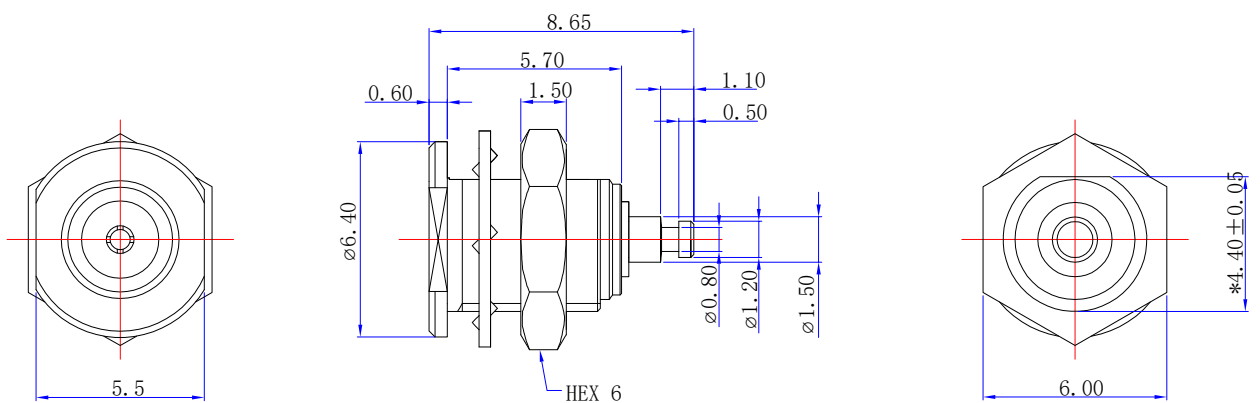

Recommended
P. C. B open
board size

Art. Nr.
RND 205-01516