

MCX JACK PCB CONNECTOR



Features

- Compact form factor makes it ideal for space-constrained applications where a low-profile RF connector solution is needed
- The MCX jack PCB connector utilizes surface-mount technology (SMT) for easy attachment to PCBs during the manufacturing process
- MCX jack PCB connectors find applications across a range of RF systems, such as wireless communication devices, GPS modules, RF test equipment, and more




Specification

Impedance	75 Ohm
Frequency Range	0 ... 6 GHz
VSWR	1.3 max
Working Voltage	500V RMS @ Sea Level
Insulation Resistance	5 GOhm min.
Temperature Range	-40... 125 °C

Material Specification

Body	Brass, Gold Plated
Insulator	PTFE
Center Pin	Brass, Gold Plated

Drawing

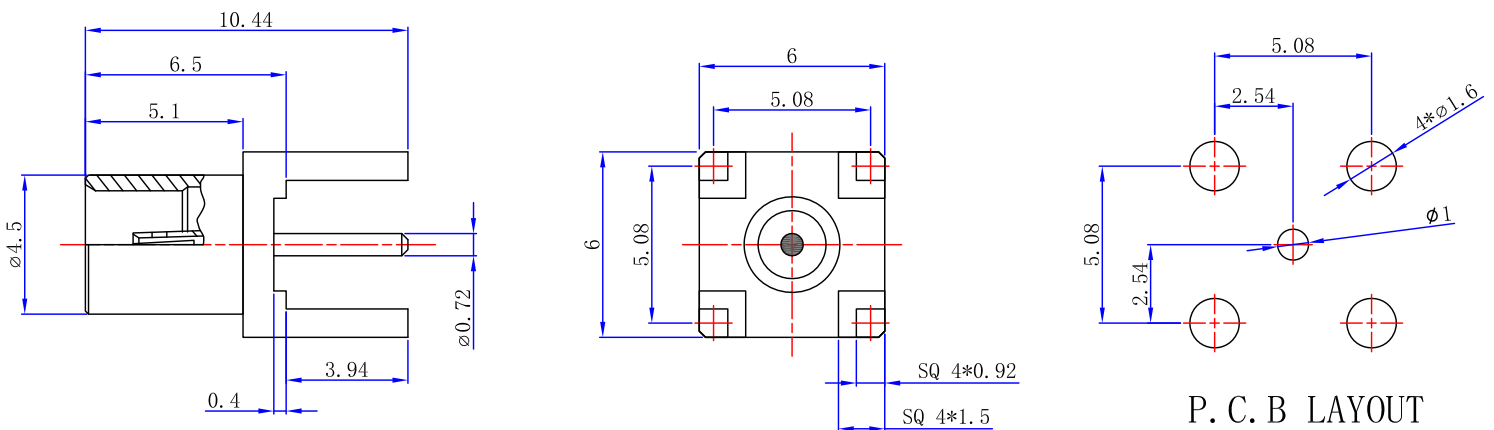

Art. Nr.
RND 205-01521