Transistor

TO-92 NPN 40 V 600 mA

RND components

Absolute Maximum Ratings (T_a = 25 °C)

Parameter		Value	Unit
Collector Base Voltage	V_{CBO}	60	V
Collector Emitter Voltage	V_{CEO}	40	V
Emitter Base Voltage	V_{EBO}	6	V
Collector Current	I_C	600	mA
Power Dissipation	P_{tot}	625	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	- 55 to + 1 0	°C

Characteristics at T_a = 25 °C

Parameter	Symb	Min.	Max.	Unit
DC Current Gain at V_{CE} = 1 V, I_C = 0.1 mA	h_{FE}	20	-	-
at V_{CE} = 1 V, I_C = 10 mA	h_{FE}	40	-	-
at V_{CE} = 1 V, I_C = 150 mA	h_{FE}	58	-	-
at V_{CE} = 2 V, I_C = 500 mA	h_{FE}	100	300	-
	h_{FE}	40	-	-
Collector Base Cutoff Current at V_{CB} = 35 V	I_{CBO}	-	100	nA
Emitter Base Cutoff Current at V_{EB} = 5 V	I_{EBO}	-	10	nA
Collector Base Breakdown Voltage at I_C = 100 µA	$V_{(BR)CBO}$	60	-	V
Collector Emitter Breakdown Voltage at I_C = 1 mA	$V_{(BR)CEO}$	40	-	V
Emitter Base Breakdown Voltage at I_E = 100 µA	$V_{(BR)EBO}$	6	-	V
Collector Emitter Saturation Voltage at I_C = 150 mA, I_B = 15 mA at I_C = 500 mA, I_B = 50 mA	$V_{CE(sat)}$	- -	0.4 0.75	V
Base Emitter Saturation Voltage at I_C = 150 mA, I_B = 15 mA at I_C = 500 mA, I_B = 50 mA	$V_{BE(sat)}$	0.75 -	0.95 1.2	V
Gain Bandwidth Product at V_{CE} = 10 V, I_C = 20 mA, f = 100 MHz	f_T	250	-	MHz
Collector Output Capacitance at V_{CB} = 5 V, f = 100 MHz	C_{ob}	-	12	pF
Turn On Time at V_{CC} = 30 V, V_{BE} = 2 V, I_C = 150 mA, I_{B1} = 15 mA	t_{on}	-	3	ns
Turn Off Time at V_{CC} = 30 V, I_C = 150 mA, I_{B1} = I_{B2} =15 mA	t_{off}	-	25	ns

Art. Nr.
RND 2N4401

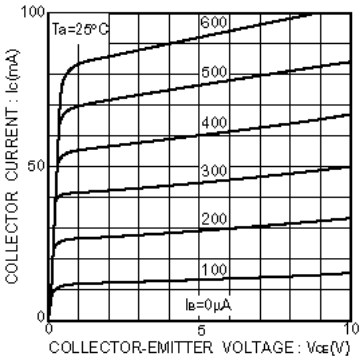

Fig.1 Grounded emitter output characteristics

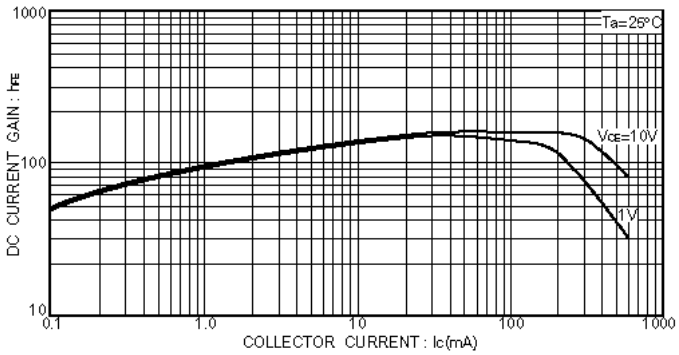

Fig.3 DC current gain vs. collector current(I)

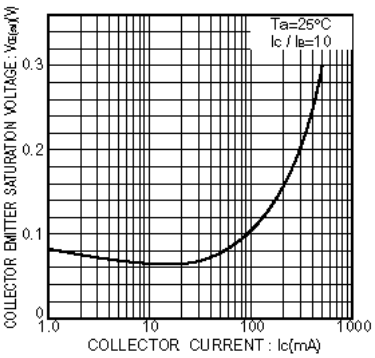

Fig.2 Collector-emitter saturation voltage vs. collector current

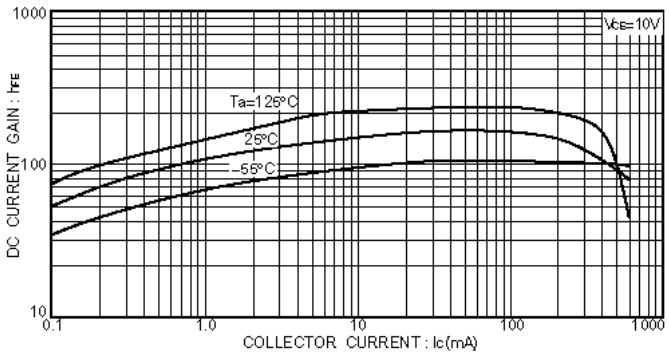

Fig.4 DC current gain vs. collector current(II)

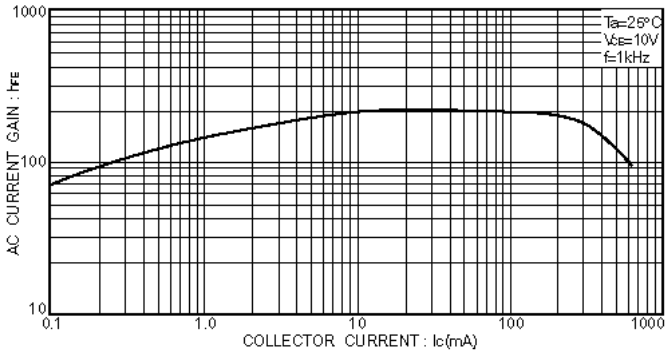

Fig.5 AC current gain vs. collector current

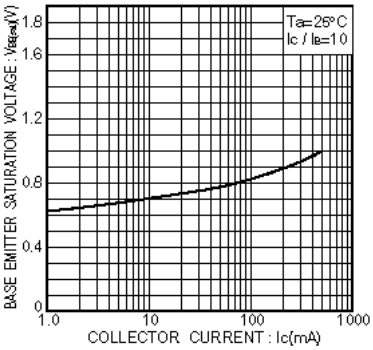

Fig.6 Base-emitter saturation voltage vs. collector current

Art. Nr.
RND 2N4401

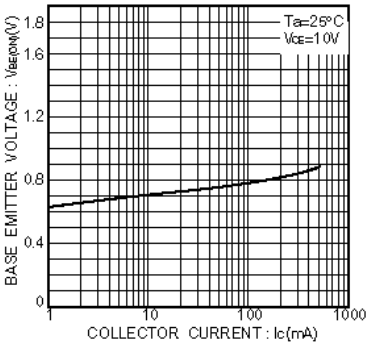

Fig.7 Grounded emitter propagation characteristics

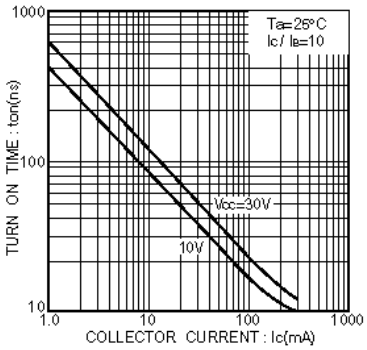

Fig.8 Turn-on time vs. collector current

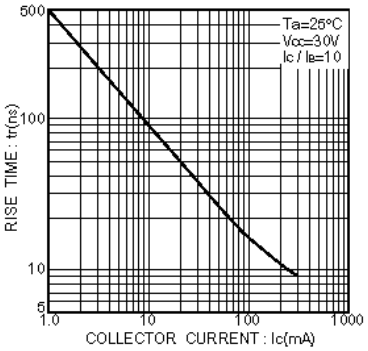

Fig.9 Rise time vs. collector current

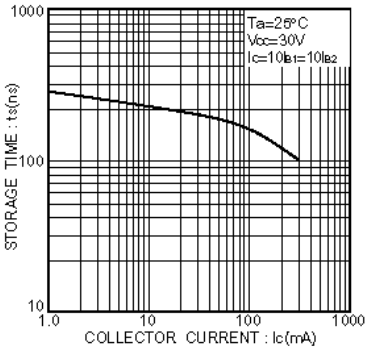

Fig.10 Storage time vs. collector current

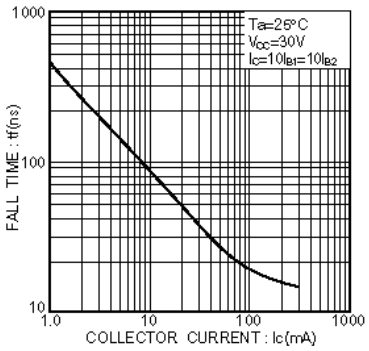

Fig.11 Fall time vs. collector current

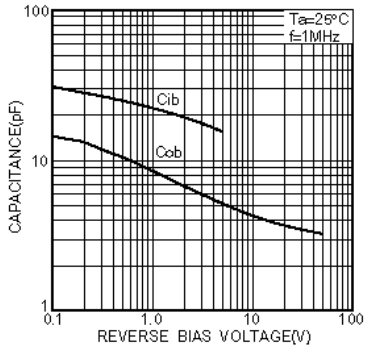

Fig.12 Input / output capacitance vs. voltage

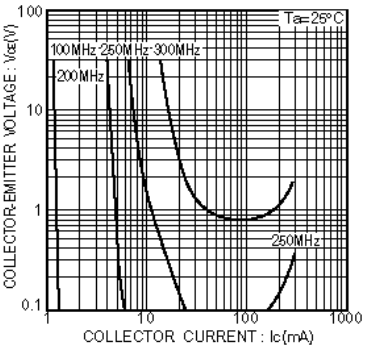

Fig.13 Gain bandwidth product

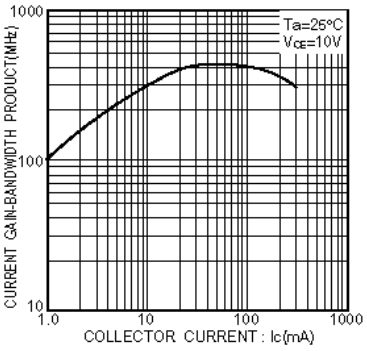

Fig.14 Gain bandwidth product vs. collector current

Art. Nr.
RND 2N4401