


# Mains Cable

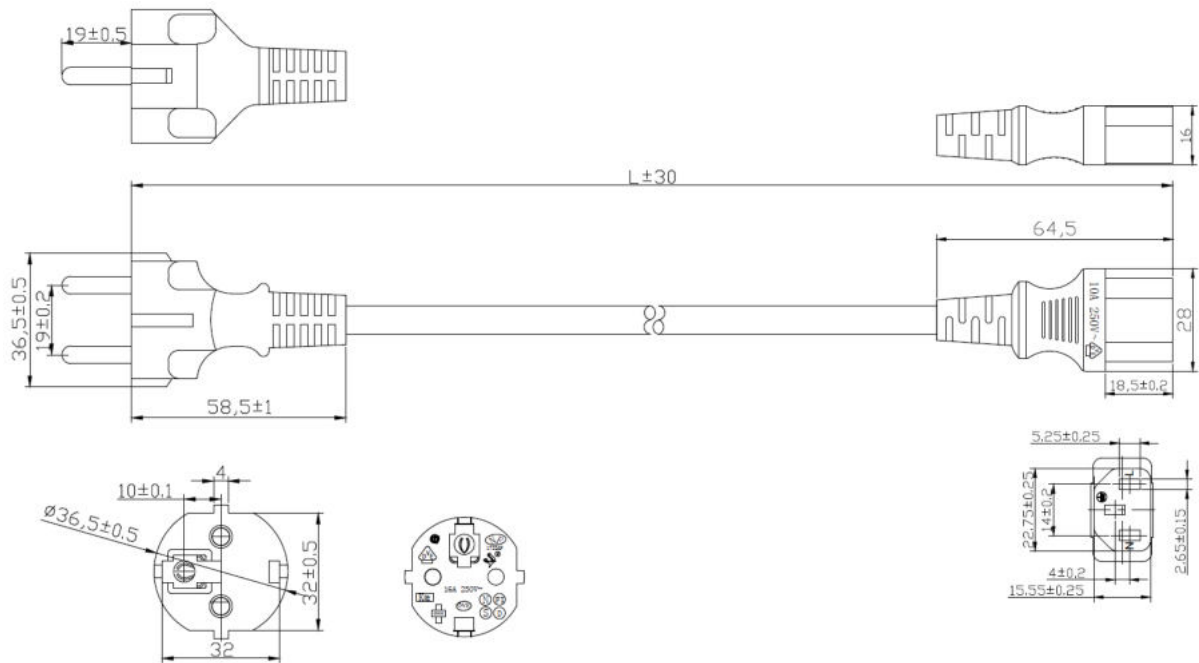

## Specification

|                       |                   |
|-----------------------|-------------------|
| Connector A           | Type F (CEE 7/7)  |
| Connector B           | IEC 60320 C13     |
| Connector Orientation | Straight          |
| Cross-Section         | 1 mm <sup>2</sup> |
| Current Rating        | 16 A              |
| Jacket Colour         | Black             |
| Jacket Material       | PVC               |
| Length (L)            | 2.5 m             |
| Voltage Rating Max.   | 250 V             |

### Notes:

- 1.Cable: H05VV-F 3G1.0<sup>2</sup>mm Jacket  $\varnothing 7.0 \pm 0.1$  Conductor 32\*0.198
- 2.Mark: <VDE> H05VV-F 3G1.0mm<sup>2</sup>
- 3.Test:Hi-pot: Inner Voltage AC2500V/1S , External Voltage AC4500V/1S  
current leakage 1mA, insulation resistance no less than 50M  $\Omega$ , no strike out;

**Art. Nr.**  
**RND 465-00921**

## Product Range

| Product name  | Model specification                 | Remarks |
|---------------|-------------------------------------|---------|
| RND 465-00920 | H05VV-F 3G 0.75mm <sup>2</sup> 1.8M | Black   |
| RND 465-00921 | H05VV-F 3G 1.0mm <sup>2</sup> 2.5M  | Black   |
| RND 465-00922 | H05VV-F 3G 1.0mm <sup>2</sup> 5.0M  | Black   |
| RND 465-00923 | H05VV-F 3G 1.0mm <sup>2</sup> 5.0M  | White   |