



Heat shrinkable tubing 4:1 - 1.2 m lengths

SA47-HT - standard wall adhesive lined

SA47-HT is a semi-rigid flame retardant polyolefin tubing with a thick inner liner of hot melt adhesive. The tubing has excellent tensile strength and strain relief. The adhesive liner provides excellent moisture protection. Ideal for electrical connections and splices in automobiles. Suitable for high temperature applications up to 150 °C. Tubing is black and hot melt adhesive is black.

Features and benefits


- Flexible, standard wall polyolefin heat shrink tubing
- Excellent tensile strength and strain relief
- Provides excellent moisture protection
- Tubing and hot melt adhesive is black
- Provides an environmental sealing of complex parts
- For high temperature applications up to 150 °C
- Flame retardant



One Step to the Web!

i SA47 has been developed with our Automotive partners to eliminate the risk of corrosion around cable splices and terminations.

i Cut lengths available on request. Please contact us!

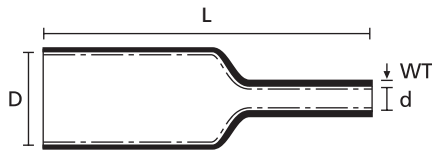

Heat Shrinkable Tubing 4:1 with adhesive



Heat shrink tubing SA47-HT for 150 °C application.



SA47-HT provides optimum protection against moisture in high temperature applications.

MATERIAL	Polyolefin, cross-linked (PO-X)
Shrink Ratio	4:1
Operating Temperature	-40 °C to +150 °C
Min. Shrink Temperature	+130 °C
Melting Point	starting from +120 °C
Longitudinal Change After Shrinkage	-10 % max.
Dielectric Strength	>20 kV/mm
Flammability	self-extinguishing



TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Length (L)	Colour	Tools	Article-No.
SA47-HT 7.6/1.7	7.6	1.7	1.52	1.2 m	Black (BK)	30-32	301-10010
SA47-HT 9.0/2.3	9.0	2.3	1.52	1.2 m	Black (BK)	30-32	301-10011
SA47-HT 11.6/2.5	11.6	2.5	2.29	1.2 m	Black (BK)	30-32	301-10012
SA47-HT 17.8/4.4	17.8	4.4	2.54	1.2 m	Black (BK)	30-32	301-10013
SA47-HT 24/6	24.0	6.0	2.54	1.2 m	Black (BK)	30-32	301-10015
SA47-HT 32/8	32.0	8.0	2.54	1.2 m	Black (BK)	30-32	301-10014

All dimensions in mm. Subject to technical changes. Minimum Order Quantity (MOQ) may differ from package content.