

Features


- Cylindrical with soldering pillar terminal
- Low ESR
- Over 1000,000 duty cycles

Applications

- Pitching control system of Wind Turbine Generator
- UPS and backup power supply
- Electronic tools and police flash lights



Dimensions

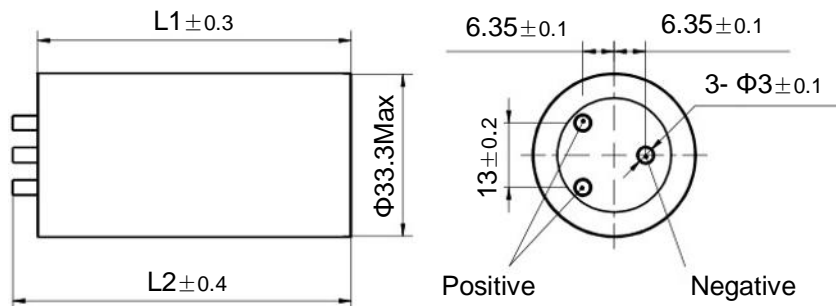

Cap	Dimension/ mm	
	L1	L2
350F	63.8	68.7
450F	79.8	84.7
600F	93.8	98.7
720F	112.8	118.7

Specifications

Items	Characteristics
Operating Voltage	2.7 VDC
Surge Voltage	2.85 VDC
Operating Temperature Range	-40°C to 65°C
Capacitance Tolerance	-10% to +20% (25°C)
Temperature Performance(-40°C to 65°C)	ΔC ≤ 5% of initial measured value@ 25°C ESR ≤ 150% of specified value
Life (1500 hours @ 65°C, 2.7 VDC)	ΔC ≤ 20% of initial measured value ESR ≤ 200% of specified value
Cycle life (1,000,000 cycles between V _R and 1/2 V _R)	ΔC ≤ 20% of initial measured value ESR ≤ 200% of specified value

Standard Product

CAP (F)	Part Number	ESR (mohm)		LC (mA, RT 72hrs)	Max. Energy Stored (Wh)	Max. Energy Density (Wh/Kg)	Max. Continuous Current (40°C, A)	Max. Peak Current (A)	Typical Mass (g)
		AC @ 1kHz	DC						
350	SCE0350C0-0002R7SPD	1.5	2.5	0.5	0.35	4.9	39	252	72
450	SCE0450C0-0002R7SPD	1.5	2.5	0.9	0.46	5.1	43	285	90
600	SCE0600C0-0002R7SPD	1.4	2.4	1.2	0.61	5.2	47	332	116
720	SCE0720C0-0002R7SPD	1.3	1.8	1.4	0.73	5.8	59	423	125

SPSCAP All Rights reserved, design, specifications are subjected to change without notice. Version: 5.0