RE11-SAO3 RE1

**NON-CONTACT SAFETY SWITCHES** 



## **RE11-SA03 | RE1**

NON-CONTACT SAFETY SWITCHES



### Ordering information

Туре	Part no.
RE11-SA03	1059411

Other models and accessories -> www.sick.com/RE1



Detailed technical data

#### Features System part Sensor and actuator **Sensor principle** Magnetic 1 Number of N/O contacts Number of N/C contacts 1 0 Number of signaling contacts Safe switch on distance Sao 3 mm Safe switch off distance Sar 12 mm Active sensor surfaces 1 Actuation directions 5

### Safety-related parameters

B <sub>10d</sub> parameter	$2 \times 10^7$ switching cycles (with small load)
Туре	Type 4 (EN ISO 14119)
Actuator coding level	Low coding level (EN ISO 14119)
Safe state in the event of a fault	The switch has no internal fault detection and is unable to assume a safe state in the event of a fault. Fault detection is performed by the connected safety-related logic unit.

#### Interfaces

Connection type	Cable
Length of cable	3 m
Cable material	PVC
Electrical data	
Type of output	Reed contacts

Type of output	Reed contacts
Switching voltage	≤ 30 V DC
Switching current	≤ 400 mA
Mechanical data	
Design	Rectangular
Dimensions (W x H x D)	26 mm x 36 mm x 13 mm
Weight	0.2 kg


## **RE11-SA03 | RE1**

NON-CONTACT SAFETY SWITCHES

Housing material	Glass-fiber reinforced PPS
Ambient data	
Enclosure rating	IP67 (IEC 60529)
Ambient operating temperature	-20 °C +60 °C
Storage temperature	-20 °C +60 °C
Vibration resistance	10 Hz 55 Hz, 1 mm (EN 60947-5-3)
Shock resistance	30 g, 11 ms (EN 60947-5-3)
Classifications	
ECI@ss 5.0	27272402

ECI@ss 5.1.4 27272402   ECI@ss 6.0 27272402   ECI@ss 6.2 27272402	201833 0.0	
	ECI@ss 5.1.4	27272402
ECI@ss 6.2 27272402	ECI@ss 6.0	27272402
	ECI@ss 6.2	27272402
ECI@ss 7.0 27272402	ECI@ss 7.0	27272402
ECI@ss 8.0 27272402	ECI@ss 8.0	27272402
ECI@ss 8.1 27272402	ECI@ss 8.1	27272402
ECI@ss 9.0 27272402	ECI@ss 9.0	27272402
ETIM 5.0 EC002544	ETIM 5.0	EC002544
ETIM 6.0 EC002544	ETIM 6.0	EC002544
UNSPSC 16.0901 39122205	UNSPSC 16.0901	39122205

### Dimensional drawing (Dimensions in mm (inch))

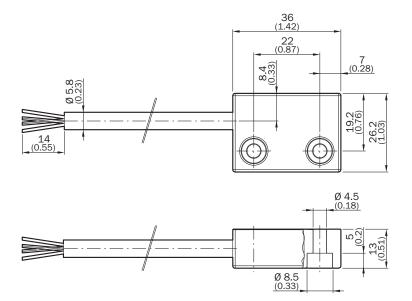


## **RE11-SA03 | RE1**

NON-CONTACT SAFETY SWITCHES

### Response range

RE11

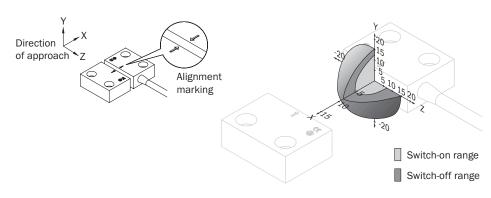


### **Connection diagram**

REx1: sensor connections



1 BN	N/O contact
2 WH	
3 BU	N/C contact
4 BK	

### Sensor timing

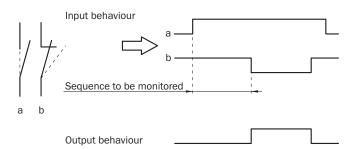

# SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

# WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com



Online data sheet

