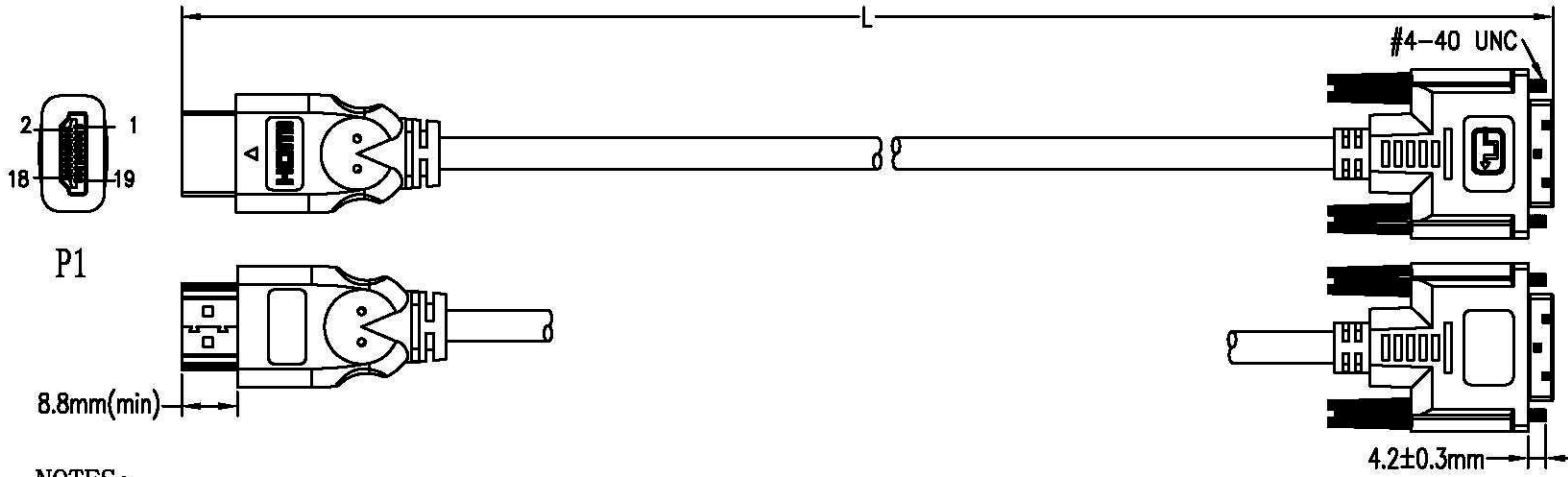

PIN OUT

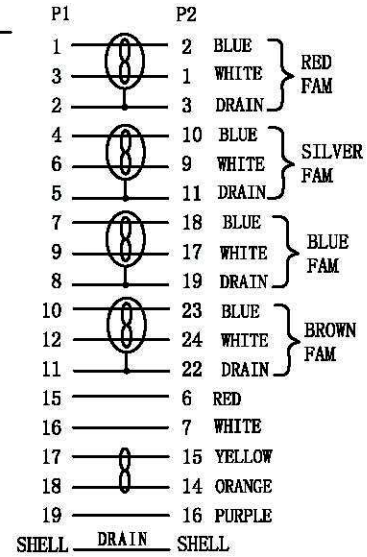

NOTES:

1. MATERIAL
   - 1.1 HDMI CABLE: (7/0.10TC*1P+7/0.10TC+FAM)*4PCS+7/0.12TC*3C+7/0.12TC*1P +AL+7/0.12TC+128/0.12ALM+BLACK PVC JACKET. OD: ⌀ 6.0 ± 0.2 mm
   - 1.2 HDMI 19PIN TYPE A MALE : BLACK INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
   - 1.3 DVI(18+1) MALE: BLACK INSULATION, GOLD PLATED CONTACTS G/F, NICKEL PLATED SHELL.
   - 1.4 THUMB SCREW TO BE MOLDED BLACK PVC. NICKEL PLATED SCREW.
   - 1.5 ALL HOOD: MOLDED BLACK PVC.
2. ELECTRICAL
   - 2.1 100% OPEN AND SHORT TEST.
   - 2.2 CONDUCTOR RESISTANCE: 5 OHMS MAX.
   - 2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN.
   - 2.4 HI-POT: DC300V/0.01S.
3. PACKAGING: A PC/PE-BAG PACKAGING .
4. ALL MATERIALS ARE REACH COMPLIANT.

P/N	L(mm)
11.99.5519	1000±30mm
11.99.5522	2000±50mm
11.99.5532	3000±70mm
11.99.5552	5000±70mm

REV.	MODIFY DESCRIPTION	DATE
02	ADD THE ONE	2012-01-05
01	CHANGE THE CABLE MARKING	2011-02-23
00	NEW ISSUE	2010-03-16

LENGTH TOLERANCE: X. ± 0.5, .X ± 0.2, .XX ± 0.1
ANGLE TOLERANCE: X° ±3°, .X° ±1°
SCALE: FREE
UNIT: mm
VERSION: 02
PAGE: 1/1

Rotronic Co., Ltd.

VALUE DVI Cable, DVI M-HDMI M, black

ENG:
CHECKED:
APPROVED: