## **ERTD Temperature Sensor**



## Medium temperature platinum RTD sensor


- Temperature range -70°C to +500°C
- PT100, PT500 and PT1000 in addition to a full range of nominal resistance values at 0°C types available
- Tolerance Classes A, B, 2B and 1/3B available
- Small package size typically 2.3 x 2.0 x 1.1 mm
- Higher and lower temperature ranges available



Variohm ERTD series Thin Film Platinum Elements are durable and designed for applications where long term stability, interchangeability and accuracy over a large temperature range are important. Applications include automotive, white goods, HVACR, energy management, medical and industrial. Nickel Thin Film Elements are also available as part of the RTD range.


## **Technical information**

Specification	DIN EN 60751 (according to IEC 751)
Temperature range	-70°C to +500°C (continuous operation) (temporary use to 550°C possible) Tolerance Class B: -70°C to +500°C Tolerance Class A: -50°C to +300°C Tolerance Class 13'B: 0°C to +150°C
Temperature coefficient	TC = 3850 ppm/K ; 3750 ppm/K available on request
Long-term stability	Max. R0-drift 0.04% after 1000 h at 500 °C
Vibration resistance	At least 40g acceleration at 10 to 2000 Hz, depends on installation
Shock resistance	At least 100g acceleration with 8ms half sine wave, depends on installation
Insulation resistance	$> 100 \ \text{M}\Omega$ at 20°C; $> 2 \ \text{M}\Omega$ at 500°C
Self heating	0.3 K/mW at 0°C
Environmental conditions	Unhoused for dry environments only
Note	Other tolerances, values of resistance and wire lengths are available on request.

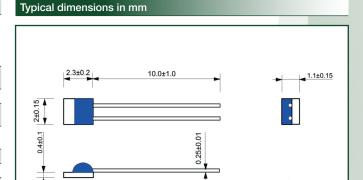

## **Ordering Information**

(Please use the characters in the chart below to contruct your product code)

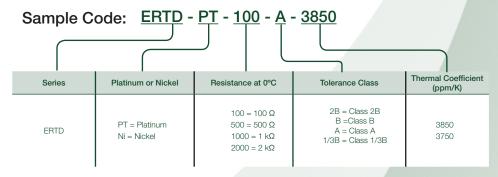

Note: Not all configurations are possible, Please contact factory to check your preferred configuration is available.

Stock model: ERTD-PT-100-A-3850 ERTD-PT-1000-A-3850

