

**DURA ECO LA-BAT 24V 12AH****Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com



The Weidmüller battery modules consist of high-quality Panasonic batteries. These are sealed, maintenance-free lead-fleece batteries. The battery modules are fitted with a temperature sensor to provide optimum battery charging and battery life. This facilitates temperature-compensated charging of the batteries.

The neat design as well as the plug-in connections for the battery connection and the temperature sensor allow the batteries to be fitted safely and quickly.

**General ordering data**

Version	Battery
Order No.	<a href="#">2789920000</a>
Type	DURA ECO LA-BAT 24V 12AH
GTIN (EAN)	4064675068679
Qty.	1 pc(s).

## DURA ECO LA-BAT 24V 12AH

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

## Technical data

### Dimensions and weights

Depth	135 mm	Depth (inches)	5.315 inch
Height	158 mm	Height (inches)	6.22 inch
Width	229 mm	Width (inches)	9.016 inch
Net weight	9,700 g		

### Temperatures

Storage temperature	-20 °C...60 °C	Humidity	5...95 % RH
---------------------	----------------	----------	-------------

### Operating interfaces and control inputs

Temperature probe	NTC 100 kΩ
-------------------	------------

### Input

Charging current, max.	1.8 A	Nominal capacity	12 Ah
Rated input voltage	24 V DC		

### Output

Buffer time 10A	51 min	Buffer time 20A	22.7 min
Buffer time 40A	9.2 min	Output current, max.	50 A
Overload and short circuit protection	2x25 A fuse	Parallel connection option	Yes
Temperature probe	NTC 100 kΩ		

### General data

Ambient temperature	Charge: -15...+50°C, Discharge: -20...+60°C	Humidity	5...95 % RH
Life expectancy	5.65 year	Protection degree	IP20
Shock wall acc. to IEC 68227	30 g	Vibration DIN rail/wall in accordance with IEC 68-2-6	- / 0.7 g

### Insulation coordination

Protection class	III, with no ground connection, for SELV
------------------	---

### Connection data (input)

Conductor cross-section, AWG/kcmil , max.	6	Conductor cross-section, AWG/kcmil , min.	24
Conductor cross-section, flexible , min.	0.5 mm <sup>2</sup>	Conductor cross-section, rigid , max.	16 mm <sup>2</sup>
Conductor cross-section, rigid , min.	0.5 mm <sup>2</sup>	Wire connection cross section, flexible (input), max.	10 mm <sup>2</sup>

### Connection data (signal)

Number of terminals	2	Wire connection method	Pluggable screw connection
Wire cross-section, AWG/kcmil , max.	16	Wire cross-section, AWG/kcmil , min.	24
Wire cross-section, solid , max.	1.5 mm <sup>2</sup>	Wire cross-section, solid , min.	0.2 mm <sup>2</sup>

Creation date March 8, 2023 11:13:41 AM CET

Catalogue status 03.03.2023 / We reserve the right to make technical changes.

**DURA ECO LA-BAT 24V 12AH**

**Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

[info@weidmueller.com](mailto:info@weidmueller.com)

[www.weidmueller.com](http://www.weidmueller.com)

**Technical data**

**Approbations**

Certificate no. (cULus)	E258476	Institute (cULus)	www.weidmueller.com
-------------------------	---------	-------------------	---------------------

**Classifications**

ETIM 6.0	EC002850	ETIM 7.0	EC002850
ETIM 8.0	EC002850	ECLASS 9.0	27-04-06-92
ECLASS 9.1	27-04-92-01	ECLASS 10.0	27-04-06-92
ECLASS 11.0	27-04-06-92	ECLASS 12.0	27-04-06-92

**Environmental Product Compliance**

REACH SVHC	Lead 7439-92-1
SCIP	30bf869c-8adc-4ed2-ad02-c1fec963e943

**Approvals**

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E258476

**Downloads**

Approval/Certificate/Document of Conformity	<a href="#">Declaration of Conformity</a>
Engineering Data	<a href="#">CAD data – STEP</a>
User Documentation	<a href="#">Instruction sheets</a> <a href="#">Safety Data Sheet</a>

**DURA ECO LA-BAT 24V 12AH**

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold


Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

**Drawings**

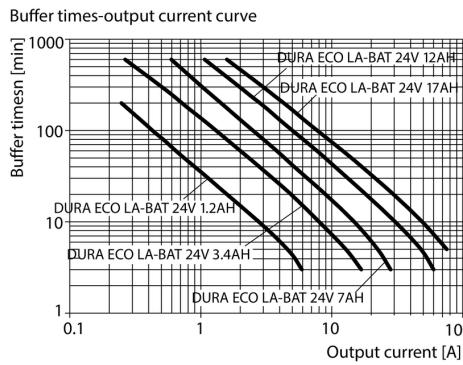

Buffer Time