

D-Link[®]

GO-SW-5E 5-PORT FAST ETHERNET EASY DESKTOP SWITCH

Manual



RECYCLABLE

V1.01

TABLE OF CONTENTS

ABOUT THIS GUIDE	1
PURPOSE.....	1
INTRODUCTION	2
FAST ETHERNET TECHNOLOGY	2
D-LINK'S GREEN TECHNOLOGY	2
SWITCHING TECHNOLOGY	3
FEATURES	4
UNPACKING AND SETUP	6
UNPACKING.....	6
SETUP.....	6
IDENTIFYING EXTERNAL COMPONENTS	7
FRONT PANEL	7
LED INDICATORS.....	7
REAR PANEL	8
SIDE PANEL.....	8
CONNECTING THE SWITCH.....	9
PC TO GO-SW-5E.....	9
HUB TO GO-SW-5E.....	9
GO-SW-5E TO OTHER DEVICES	9
PORT SPEED & DUPLEX MODE	10
TECHNICAL SPECIFICATIONS	11
RJ-45 PIN SPECIFICATION	13

ABOUT THIS GUIDE

Congratulations on your purchase of the D-Link GO-SW-5E. This device integrates 100Mbps Fast Ethernet and 10Mbps Ethernet network capabilities in one high-performance, easy-to-use solution.

Purpose

This manual will familiarize you with the GO-SW-5E and guide you through the installation process.

INTRODUCTION

Fast Ethernet Technology

The growing importance of LANs and the increasing complexity of desktop computing applications are fueling the need for high performance networks. 100BASE-T (Fast Ethernet) provides a cost-effective and high-performance solution for small workgroups, SMBs (*Small to Medium Businesses*), and any network supporting bandwidth-intensive applications. Fast Ethernet technology operates at 10 times the speed of traditional Ethernet, offering maximum performance and enhanced capability for existing Ethernet-based networks.

100Mbps Fast Ethernet is a standard specified by the IEEE 802.3 LAN committee. It is an extension of the 10Mbps Ethernet standard with the ability to transmit and receive data at 100Mbps, while maintaining the CSMA/CD Ethernet protocol. Since the 100Mbps Fast Ethernet is compatible with all other 10Mbps Ethernet environments, it provides a straightforward upgrade and takes advantage of the existing investment in hardware, software, and personnel training.

D-Link's Green Technology

D-Link's Green Technology implements special power-saving features under speed at 100Mbps that link status and adjust power usage accordingly. Further, D-Link Green implements the newly ratified IEEE 802.3az Energy Efficient Ethernet standard for reducing energy consumption of network links during periods of low utilization by transitioning interfaces into low-power state without interrupting the network connection.

- IEEE 802.3az Energy-Efficient Ethernet (EEE):

It is the first standard in the history of Ethernet to address proactive reduction in energy consumption for networked devices. The IEEE 802.3 EEE standard defines mechanisms and protocols intended to reduce the energy consumption of network links during periods of low utilization, by

transitioning interfaces into a low-power state without interrupting the network connection.

- Power Saving Technology:

Power saving by link status. If there is no link on a port, such as when there is no computer connected to the port or the connected computer is powered off, D-Link's Green Technology will enter a "sleep mode", drastically reducing power used for that port.

Switching Technology

Switching is a cost-effective way of increasing the total network capacity available to users on a LAN. If an Ethernet network begins to display symptoms of congestion, low throughput, slow response times, and high rates of collision, installing a switch to a network can preserve much or all of the existing network's cabling and workstation interface card infrastructure, while still greatly enhancing the throughput for users. A switch is a viable solution even if demanding applications, such as multimedia production and video conferencing, are on the horizon. The most promising techniques, as well as the best return on investment, could well consist of installing the right mixture of Ethernet switches.

A switch increases capacity and decreases network loading by dividing a local area network into different LAN segments. Dividing a LAN into multiple segments is one of the most common ways of increasing available bandwidth. If segmented correctly, most network traffic will remain within a single segment, enjoying the full-line speed bandwidth of that segment.

Switches provide full-line speed and dedicated bandwidth for all connections. This is in contrast to hubs, which use the traditional shared networking topology, where the connected nodes contend for the same network bandwidth. When two switching nodes are communicating, they are connected with a dedicated channel between them, so there is no contention for network bandwidth with other nodes. As a result, the switch considerably reduces the likelihood of traffic congestion.

For Ethernet networks, a switch is an effective way of eliminating the

problem of chaining hubs beyond the “two-repeater limit.” A switch can be used to split parts of the network into different collision domains, making it possible to expand your Ethernet network beyond the 205-meter network diameter limit for 100BASE-TX networks. Switches supporting both 10Mbps Ethernet and 100Mbps Fast Ethernet are also ideal for bridging between existing 10Mbps networks and newer 100Mbps networks.

Switching LAN technology is a marked improvement over the previous generation of network hubs and bridges, which were characterized by higher latencies. Routers have also been used to segment local area networks, but the cost of a router, the setup and maintenance required, make routers relatively impractical. Today switches are an ideal solution to most kinds of local area network congestion problems.

Features

The GO-SW-5E is a high performance switch designed specifically for environments where traffic on the network and the number of users increase continuously.

GO-SW-5E implements D-Link’s Green Technology special power-saving features under speed at 100Mbps that link status and adjust power usage accordingly. Furthermore, D-Link Green implements the newly ratified IEEE 802.3az Energy Efficient Ethernet standard for reducing energy consumption of network links during periods of low utilization by transitioning interfaces into low-power state without interrupting the network connection.

The GO-SW-5E, with its small, compact size, was specifically designed for small to mid-sized workgroups. The GO-SW-5E can be installed where space is limited; moreover, it provides immediate access to a rapidly growing network through a wide range of user-reliable functions.

The GO-SW-5E is ideal for deployment with multiple high-speed servers for 10Mbps or 100Mbps shared-bandwidth workgroups. With the highest bandwidth at 200Mbps (100Mbps full-duplex mode), any port can provide workstations with a congestion-free data pipe for simultaneous access to

the server.

The GO-SW-5E is scalable, allowing two or more GO-SW-5E to be cascaded together. Since all ports support 200Mbps, any one of its five ports may be used to cascade to an additional switch to open a Full-Duplex Fast Ethernet pipe.

The GO-SW-5E is the perfect choice for a department or office planning to upgrade to Fast Ethernet. The GO-SW-5E can accommodate 10Mbps or 100Mbps devices, providing a flexible solution for existing (10Mbps) Ethernet workgroups.

The GO-SW-5E combines dynamic memory allocation with store-and-forward switching to ensure that the buffer is effectively allocated for each port; and it controls the data flow between the transmit and receive nodes to guarantee against possible packet loss.

The GO-SW-5E is an unmanaged 10/100Mbps Fast Ethernet switch that offers solutions for the accelerating bandwidth needs of small Ethernet workgroups.

Other key features include:

- Auto-MDI/MDI-X function supports automatic MDI/MDI-X crossover detection, giving true ‘plug and play’ capability—Crossover or Straight-Through CAT5 cables can be plugged into any port.
- Nway Auto-negotiation for any port. This allows for auto-sensing of speed (10/100Mbps), providing an automatic and flexible solution for the network.
- Flow control for any port. This minimizes dropped packets by sending out collision signals when the port’s receiving buffer is full.
- Data filtering rate eliminates all error packets, runts, etc., per port at wire-speed for 100Mbps operation and 10Mbps operation.

UNPACKING AND SETUP

Unpacking

Open the box and carefully unpack it. The box should contain the following items:

- One GO-SW-5E: 5-PORT FAST ETHERNET EASY DESKTOP SWITCH
- One External Power Adapter
- Quick Installation Guide

If any item is missing or damaged, please contact your local reseller for a replacement.

Setup

The setup of the GO-SW-5E can be performed using the following steps:

- The power outlet should be within 1.82 meters (6 feet) of the Switch.
- Visually inspect the DC power jack and make sure that it is fully secured to the power adapter.
- Do not cover the ventilation holes on the sides of the Switch, and make sure there is adequate ventilation around it.
- Do not place heavy objects on the switch.

IDENTIFYING EXTERNAL COMPONENTS

Front Panel

The figure below shows the front panel of the GO-SW-5E.



GO-SW-5E 5-PORT FAST ETHERNET EASY DESKTOP SWITCH

LED Indicators

- **Power Indicator:**
This green indicator light is on when the Switch is receiving power; otherwise, it is off.
- **Link/Act:**
This LED indicator light is green when the port is connected to a device. The green indicator blinks as data is transmitted or received.

Rear Panel



GO-SW-5E 5-PORT FAST ETHERNET EASY DESKTOP SWITCH

Auto MDI/MDI-X Ports:

All ports support automatic MDI/MDI-X crossover detection. The AutoMDI/MDI-X function makes it simple to connect to the switch—just plug either a Crossover or Straight-Through CAT5 cable into any port.

Side Panel



Power Jack:

Power is supplied through an external power adapter. Check the technical specification section for information about the power input voltage.

Since the GO-SW-5E does not require a power button, plugging its power adapter into a power outlet will immediately power it on.

CONNECTING THE SWITCH

PC to GO-SW-5E

A computer can be connected to the GO-SW-5E via a two-pair Category 3, 4, 5 UTP/STP Straight-Through or Crossover cable. A computer equipped with a RJ-45 10/100Mbps port can be connected to any of the five GO-SW-5E ports.

The LED indicators for the PC connection depend on the capability of the computer's Ethernet card. If the LED indicators are not lit after making a proper connection, check the computer's Ethernet card, the cable, and the GO-SW-5E's conditions and connections.

Hub to GO-SW-5E

A hub (10 or 100BASE-TX) can be connected to the GO-SW-5E via a two-pair Category 3, 4, or 5 UTP/STP Straight-Through or Crossover cable. For 100Mbps operation a Category 5 cable **must** be used. The connection is accomplished from any port of the hub to any port of the GO-SW-5E.

GO-SW-5E to other devices

The GO-SW-5E can be connected to another switch or other devices (routers, bridges, etc.) via a two-pair Category 3, 4, 5 UTP/STP Straight-Through or Crossover cable. A Category 5 cable **must** be used for 100Mbps operation. The connection can be accomplished from any (MDI-X) port on the GO-SW-5E to any of the 10Mbps or 100Mbps (MDI-X) ports on another switch or other devices.

Port Speed & Duplex Mode

After plugging the selected cable to a specific port, the system uses auto-negotiation to determine the transmission mode, auto-detecting the network speed (10Mbps or 100Mbps) for any new twisted-pair connection.

If the attached device **does not** support auto-negotiation or has auto-negotiation disabled, an auto-sensing process is initiated to select the speed and **half-duplex** mode is selected.

TECHNICAL SPECIFICATIONS

General	
Standards	IEEE 802.3 10BASE-T Ethernet IEEE 802.3u 100BASE-TX Fast Ethernet
Protocol	CSMA/CD
Data Transfer Rate	Ethernet: 10Mbps (half duplex) 20Mbps (full-duplex) Fast Ethernet: 100Mbps (half duplex) 200Mbps (full-duplex)
Topology	Star
Network Cables	10BASE-T: 2-pair UTP CAT. 3,4,5/5e (100 m), EIA/TIA-568 100-ohm STP (100 m) 100BASE-TX: 2-pair UTP CAT. 5/5e (100 m), EIA/TIA-568 100-ohm STP (100 m)
Number of Ports	5 x 10/100Mbps auto-negotiation, auto MDI/MDI-X ports
Physical and Environmental	
DC inputs	DC 5V/0.55A
Power Consumption	0.9W (DC), 1.6W (AC)
Temperature	Operating: 0° ~ 40° C (32° to 104°F) Storage: -10° ~ 70° C (14° to 158°F)
Humidity	Operating: 10% ~ 90% RH, Non-condensing Storage: 5% ~ 90% RH, Non-condensing
Dimensions (W x H x D)	(approx.) 3.4 x 1.9 x 0.9 inches (87 x 47.85 x 21.7 mm)
EMI:	FCC Class B, ICES-003 Class B, CE Class B, VCCI Class B, C-Tick Class B
Safety	LVD

Performance


Transmission Method:	Store-and-forward
RAM Buffer	384Kbits(48KBytes)
Filtering Address Table	2K entries per device
Packet Filtering / Forwarding Rate:	10Mbps Ethernet: 14,880/pps 100Mbps Fast Ethernet: 148,800/pps
MAC Address Learning:	Automatic update

RJ-45 PIN SPECIFICATION

The following diagram and tables show the standard RJ-45 receptacle/connector and their pin assignments.

RJ-45 Connector pin assignment	
Contact	Media Direct Interface Signal
1	Rx +(receive)
2	Rx - (receive)
3	Tx + (transmit)
4	Not used
5	Not used
6	Tx - (transmit)
7	Not used
8	Not used

RJ-45 pin assignment

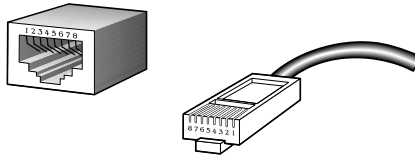

Standard RJ-45 receptacle/connector