



Connected Smart-UPS with APC SmartConnect The First Cloud-enabled UPS For Distributed IT

The world's most popular network and server UPS

APC™ award-winning Smart-UPS™ is the most popular UPS in the world for servers, storage and network power protection. Smart-UPS provides availability and manageability to your network allowing you to focus on business growth instead of business downtime. Trusted to protect critical data and equipment from power problems by supplying clean and reliable network-grade power.

Connected Smart-UPS units boast an ingenious networking feature that makes Smart-UPS even more adaptable and easier to deploy: APC SmartConnect — a feature which allows you to view the status of your UPS through a secure web portal. Through this innovative remote monitoring interface, you'll receive automatic notifications, firmware updates, and advanced support. APC SmartConnect's easy-to-use network connectivity provides added value — and more important — added peace of mind.

Life Is On 

APC®
by Schneider Electric

The world's most popular UPS just got smarter

Connected Smart-UPS is here:



APC SmartConnect Enabled:

- Accessible from any internet connected device, on site or mobile
- Simple account login and Registration
- Proactive actionable alerts and lifecycle recommendations
- Compatible with major RMM platforms
- No special software, SNMP trap or coding required
- Connected Smart-UPS adhere to the latest industry standards in secure data collection

Connected Smart-UPS Features:

APC SmartConnect

APC SmartConnect is a proactive remote UPS cloud monitoring feature that is accessible from any internet connected device

Pure Sinewave

Instant backup battery power with pure sinewave output during a power outage

Intelligent Battery Management

Temperature compensated charging extends life and advanced algorithms recommend replacement date

High-efficiency Greenmode

Optimum efficiency which saves utility and cooling costs

Network-grade Power

Provides stable power conditions by filtering noise, automatic voltage regulation (AVR), and surge protection

Emergency Power Off (EPO)

Provides for remote UPS shut-off in the event of a fire or other emergency (2,200 VA and above)

Getting Started is Easy



1 Install your UPS

Install your SmartConnect-compatible UPS at your business site. Connect it to your network using a dedicated ethernet port.



2 Scan the QR code

Scan the QR Code printed on your Smart-UPS, and automatically register your device with the SmartConnect Web Portal.



3 Register your UPS

Create a Schneider Electric account to register your Smart-UPS. Your UPS will be automatically linked to your account.

Certainty in a Connected World

Life Is On

APC
by Schneider Electric

Connected Smart-UPS SMC Features

Application optimized models ideal for entry level servers, point-of-sale (POS) and other small network devices



APC SmartConnect

Proactive remote UPS cloud monitoring feature that is accessible from any internet connected device

Pure Sine-wave Output

Simulates the utility when on battery for optimum device compatibility

Advanced Battery Management

Temperature compensated charging extends life of internal batteries

High Efficiency Green Mode

Save utility costs and reduces heat promoting longer component life

Network Grade Power Conditioning

Automated voltage regulation (AVR), noise filtering and surge protection

LCD Display

Intuitive interface provides comprehensive status information at a glance

Communication Ports

USB and serial ports for UPS management

Safety-agency Approved

Ensures the product has been tested and approved to national standards

Generous Number of Outlets

All receptacles are surge and UPS protected

Battery Disconnect


Convenient way to disconnect battery for transport (Tower models)

Connected Smart-UPS SMC

The most affordable true sine-wave UPS's in the Smart-UPS family . Designed for entry level servers, it is compatible with today's active power factor corrected (PFC) power supplies.

Life Is 

APC[®]
by Schneider Electric

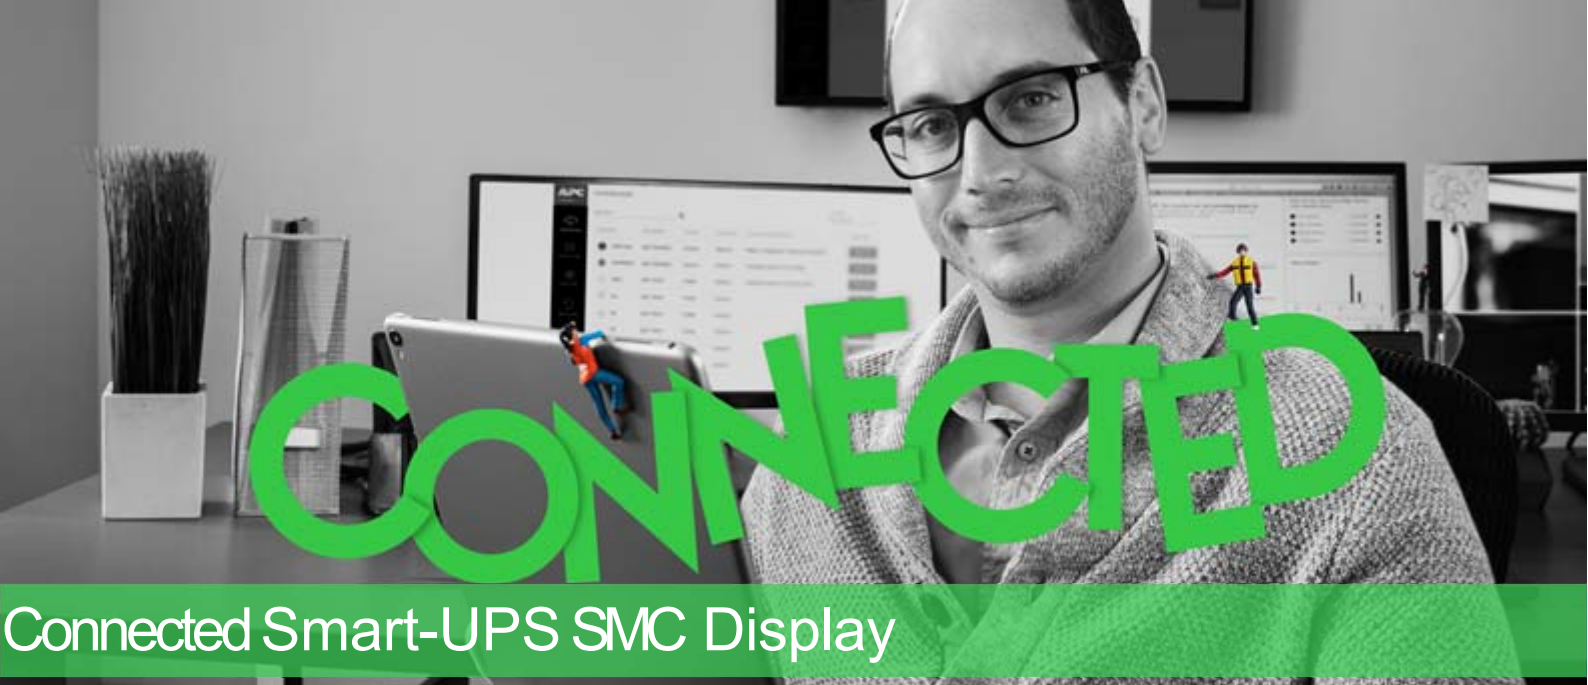

Connected Smart-UPS SMC Display

Comprehensive LCD interface for status at a glance



LCD display

Comprehensive status at a glance

Status conditions:

- On line
- On battery
- Green mode
- Load graph
- Battery charge graph
- Audible alarm

Measure:

- Input & output voltage
- Load viewable in watts, VA and percentage
- Output current and frequency
- Event counter
- Estimated on battery runtime

1 On line / On battery

2 On / Off button

3 System fault LED

4 Mute button

5 Display button

Life Is On

APC
by Schneider Electric

Connected Smart-UPS SMT Features

Intelligent and efficient network power protection from entry level to scalable runtime. Ideal for servers, point-of-sale, routers, switches, hubs, and other network devices.

In addition to Smart-UPS SMC features:

SmartSlot™ Interface

Accepts a wide array of accessory cards for advanced management and environmental monitoring

Switched Outlet Group

Controlled separately from the UPS for discrete reboot of hung devices, sequenced ON/OFF, and non-critical load shedding

Configurable, Multi-lingual LCD Display

Provides UPS status and key measures at a glance. Clear and accurate, menu-driven display for easy set-up and customization with or without software installation



Extended-range Automatic Voltage Regulation

Provides enhanced brownout protection, boosting incoming voltage up to 30% without using battery power

Rack-mount Rails

All hardware provided to securely install in your IT rack

Emergency Power Off (EPO)

Provides for remote UPS shut-off in the event of a fire or other emergency (2,200 VA and above)




Connected Smart-UPS

Advanced line-interactive power protection for servers and network equipment

Life Is 

APC[®]
by Schneider Electric

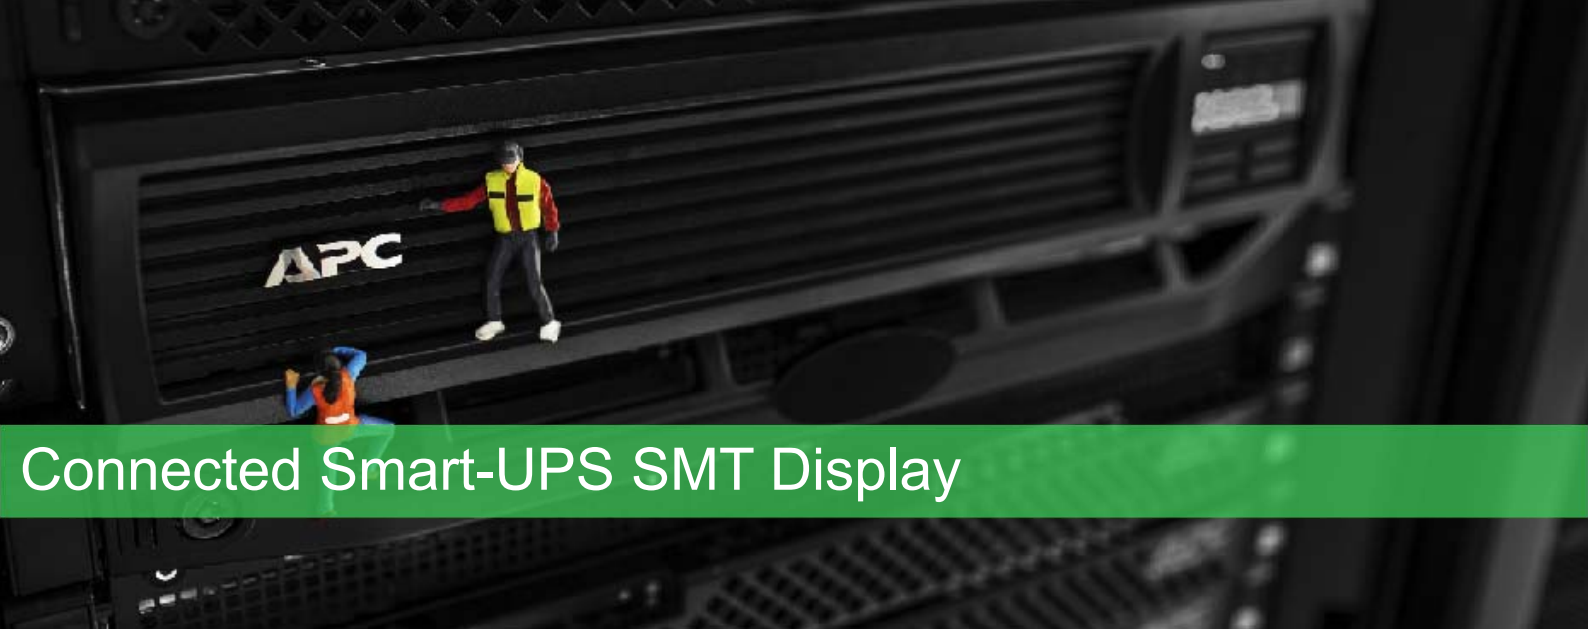

Connected Smart-UPS SMT Display

Intuitive, easy-to-use LCD interface



LCD display screen

Clear, consistent, and detailed information in your choice of basic or advanced menus

Power status

Operating mode, efficiency, load, input / output frequency, battery capacity, runtime and more

Configuration

Easily configure: language, power quality, alarms, delay and threshold settings

Test and diagnostics

Initiate battery and runtime calibration tests

Control

UPS and outlet group settings

Logs

See explanation of last 10 transfers and faults

Quick status indicators

Online, on battery, fault, and replace battery LEDs for quick status identification

Escape, return and navigation buttons

Intuitive navigation to confirm, exit or adjust settings

Load energy meter

Track energy usage in kilo watt hours

Life Is On



Connected Smart-UPS Management Solutions

APC SmartConnect

Automatically included in Connected Smart-UPS units, APC SmartConnect is an ingenious connectivity feature that makes Smart-UPS even more adaptable and easier to deploy: APC SmartConnect allows you to view the status of your UPS through a secure web portal. Through this innovative remote monitoring interface, you will receive automatic notifications, firmware updates, and advanced support.



APC SmartConnect features:

- No special software or gateway required
- Accessible from any internet connected device
- Compatible with major RMM platforms
- Actionable alerts and lifecycle recommendations
- Enhanced troubleshooting and support
- Simple account login and registration

PowerChute Business Edition For graceful UPS shutdown

Built-in manageability for your UPS unit

PowerChute Business Edition software provides UPS management, safe system shutdown, and innovative energy reporting capabilities. Energy usage, cost, and CO2 reporting provides a greater understanding of the energy consumed by IT equipment, enabling improved energy efficiency. Advanced analysis features help to identify the causes of potential power-related problems before they occur, ensuring the health of your protected equipment.



PowerChute Business Edition features:

- Graceful system shutdown
- Fault notifications
- Risk-assessment reporting
- Scheduled shutdowns
- Energy-usage reporting
- Centralized monitoring
- Recommended actions
- Battery status
- Outlet-aware shutdown
- Event and data logging
- Power-event summary
- Voltage analysis

Life Is On

APC[®]
by Schneider Electric

Connected Smart-UPS Management Solutions

UPS Network Management Cards

For remote management and control

Connect to your network and enjoy direct control

APC UPS network management cards allow for secure connection and control of an individual APC UPS unit via web browser, command-line interface, or SNMP. The configurable notification features keep you informed of problems as they occur. For protected servers, the included PowerChute Network Shutdown software provides graceful, unattended shutdown in the event of an extended power outage, always keeping business information safe.



Network management card features:

- **Browser accessible:** View the user interface with a browser for quick access from anywhere, on a secure network
- **Remote device management:** Enable management of your UPS by connecting it directly to the network
- **Fault notification:** Get real-time event notifications, minimizing response time to critical physical infrastructure situations – reducing meantime to repair, improving efficiency, and maximizing uptime
- **Reboot equipment remotely:** Eliminate the need to dispatch technicians to remote locations

PowerChute Network Shutdown

Provides graceful network-based shutdown of physical and virtual IT architectures

PowerChute Network Shutdown Edition software provides UPS management, safe system shutdown, and innovative energy reporting capabilities. Energy usage, cost, and CO2 reporting provides a greater understanding of the energy consumed by IT equipment, enabling improved energy efficiency. Advanced analysis features help to identify the causes of potential power-related problems before they occur, ensuring the health of your protected equipment.



PowerChute Network Shutdown features:

- Graceful network-based shutdown
- Sequenced server shutdown
- Integration with VMware and Microsoft Hyper-V
- Support for virtual clusters
- Virtual machine migration / shutdown
- IPv6 support
- Virtual machine prioritization
- Command file integration
- Redundant and parallel UPS support
- Event logging
- HTTPS communications
- Scalable architecture for host of client systems

Life Is On

APC[®]
by Schneider Electric

Connected Smart-UPS Services and Accessories

Schneider Electric Critical Power & Cooling Services (CPCS) provides the highest quality services and solutions by trained and trusted professionals. Our world-class services offer a smart way to build, operate, and maintain your critical applications, ensuring the right people, in the right place, at the right time.

Management cards

- **AP9630:** UPS Network Management Card
- **AP9631:** UPS Network Management card with environmental monitoring



AP9631

Additional accessories

- **AP9625:** APC Smart-UPS two-post rail kit



AP9625

Service bypass panels

- **SBP1500RM:** APC service bypass PDU, 120V; 15 amp with (8) NEMA 5-15R
- **SBP300RM:** APC service bypass PDU, 120V; 30 amp with (4) NEMA 5-20R
- **SBP3000:** APC service bypass panel, 100–240V; 30 amp; BBM; hard-wire input /output



SBP3000RM

APC Smart-UPS SMC

Tower Technical Specifications



SMC1000IC

SMC1500IC

Output

| | | |
|------------------------|-----------------|---------------|
| Power Capacity | 600W / 1000VA | 900W / 1440VA |
| Nominal Output Voltage | 230V | |
| Output Frequency | 47-63 Hz | |
| Wave Form Type | Pure Sine Wave | |
| Output Connections | (8) IEC 320 C13 | |

Input

| | | |
|--|---------------------------------|--|
| Nominal Input Voltage | 230V | |
| Input Voltage Range for main operations (Max adjustable range) | 180 – 286 V (170-300V) | |
| Input Frequency | 50/60 Hz +/-3 Hz (auto sensing) | |
| Input Connection | IEC 320 C20 | |

Batteries and Runtime

| | | |
|----------------------|--|--------|
| Battery Type | Maintenance-free sealed lead-acid battery with suspended electrolyte | |
| Runtime at Half Load | 14 min | 11 min |
| Runtime at Full Load | 5.Min | 4 min |
| Replacement Battery | APCRBC142 | RBC6 |

Communication and Management

| | | |
|----------------------------------|--|--|
| APC SmartConnect Enabled | Yes | |
| Interface Ports | USB and Serial (RJ45) | |
| Control Panel and Audible Alarms | Etched glass LCD display with LED status indicators; alarm on battery, distinctive low battery alarm | |

Surge Protection Filtering

| | | |
|------------------------------|--|--|
| Surge Energy Rating (Joules) | 693 J | |
| Filtering | Full time multi-pole noise filtering: 0.3% IEEE surge let-through, zero clamping response time, meets UL1449 | |

Physical

| | | |
|------------------------|--------------------|--------------------|
| Dimensions (H x W x D) | 219 x 171 x 439 mm | 219 x 171 x 439 mm |
| Net Weight | 17.25 kg | 20.4 kg |

Conformance

| | | |
|------------|-----------------------|--|
| Regulatory | VDE, CE, GOST, C-Tick | |
|------------|-----------------------|--|

APC Smart-UPS SMC

Rackmount Technical Specifications



SMC1000I-2UC

SMC1500I-2UC

Output

| | | |
|------------------------|-----------------|---------------|
| Power Capacity | 600W / 1000VA | 900W / 1440VA |
| Nominal Output Voltage | 230V | |
| Output Frequency | 47-63 Hz | |
| Wave Form Type | Pure Sine Wave | |
| Output Connections | (4) IEC 320 C13 | |

Input

| | | |
|--|------------------------------------|--|
| Nominal Input Voltage | 230V | |
| Input Voltage Range for main operations (Max adjustable range) | 180 – 286 V (170-300V) | |
| Input Frequency | 47 / 63 Hz +/- 3 Hz (auto-sensing) | |
| Input Connection | IEC 320 C14 | |

Batteries and Runtime

| | | |
|----------------------|--|-----------|
| Battery Type | Maintenance-free sealed lead-acid battery with suspended electrolyte | |
| Runtime at Half Load | 14 min | 18 min |
| Runtime at Full Load | 5 min | 6 min |
| Replacement Battery | APCRBC124 | APCRBC132 |

Communication and Management

| | | |
|----------------------------------|--|--|
| APC SmartConnect Enabled | Yes | |
| Interface Ports | USB and Serial (RJ45) | |
| Control Panel and Audible Alarms | Etched glass LCD display with LED status indicators; alarm on battery, distinctive low battery alarm | |

Surge Protection Filtering

| | | |
|------------------------------|--|--|
| Surge Energy Rating (Joules) | 693 J | |
| Filtering | Full time multi-pole noise filtering: 0.3% IEEE surge let-through, zero clamping response time, meets UL1449 | |

Physical

| | | |
|------------------------|-------------------|-------------------|
| Dimensions (H x W x D) | 86 x 432 x 409 mm | 86 x 432 x 477 mm |
| Net Weight | 17.5 kg | 27.1 kg |

Conformance

| | | |
|------------|-----------------------|--|
| Regulatory | VDE, CE, GOST, C-Tick | |
|------------|-----------------------|--|

Life Is On

APC
by Schneider Electric

APC Smart-UPS SMT

Tower Technical Specifications



| | SMT750IC | SMT1000IC | SMT1500IC | SMT2200IC | SMT3000IC |
|--|---|-----------------|----------------|--|----------------|
| Output | | | | | |
| Power Capacity | 500 W/750 VA | 700W / 1000VA | 1000W / 1500VA | 1980 W/2200 VA | 2700 W/3000 VA |
| Nominal output voltage | 230 V (configurable to 220 or 240 V nominal) | | | | |
| Output frequency | 47 - 53 Hz for 50 Hz nominal; 57 – 63 Hz for 60 Hz nominal | | | | |
| Waveform type | Sine wave | | | | |
| Output connections (NEMA) | (6) IEC320 C13 | (8) IEC 320 C13 | | (8) IEC320 C13, (1) IEC320 C19 | |
| Switched outlet groups | - | 1 | | | |
| Input | | | | | |
| Nominal input voltage | 230V | | | | |
| Input voltage range for main operations (Max adjustable) | 160 – 286V (150 – 300V) | | | | |
| Input frequency | 50/60 Hz +/-3 Hz (auto sensing) | | | | |
| Input connection | IEC320 C14 | | | IEC320 C20, Schuko CEE7/EU1-16), British BS1363A | |
| Batteries and runtime | | | | | |
| Battery type | Maintenance-free sealed lead-acid battery with suspended electrolyte; leak proof | | | | |
| Replacement battery | RBC48 | RBC6 | RBC7 | RBC55 | |
| Runtime estimates | | | | | |
| 200W | :22 | :45 | 1:24 | 2:17 | 2:29 |
| 500W | :05 | :10 | :23 | :51 | :55 |
| 700W | - | :06 | :12 | :34 | :37 |
| 1000W | - | - | :07 | :21 | :23 |
| 1400W | - | - | - | :13 | :14 |
| 1600W | - | - | - | :10 | :12 |
| Full load | :05 | :06 | :07 | :07 | :06 |
| Communications and management | | | | | |
| APC SmartConnect Enabled | Yes | | | | |
| Interface ports | Serial (RJ45), USB, and SmartSlot | | | | |
| Control panel and audible alarms | Alpha-numeric LCD display with LED status indicators; alarm on battery, distinctive low battery alarm and configurable delays | | | | |
| Emergency power off (EPO) | Optional | | | Yes | |
| Physical | | | | | |
| Maximum height (millimeter) | 161 | 219 | 219 | 435 | 435 |
| Maximum width (millimeter) | 138 | 171 | 171 | 197 | 197 |
| Maximum depth (millimeter) | 363 | 439 | 439 | 54.4 | 54.4 |
| Net weight (kilograms) | 13.18 | 19.5 | 22.7 | 48.80 | 52.50 |
| Conformance | | | | | |
| Regulatory | RCM, CE, EN62040-1, EN62040-2, EAC, VDE | | | | |

Life Is On

APC
by Schneider Electric

APC Smart-UPS SMT

Rackmount Technical Specifications



| | SMT750RMI2UC | SMT1000RMI2UC | SMT1500RMI2UC | SMT2200RMI2UC | SMT3000RMI2UC |
|--|---|---------------|----------------|--------------------------------|----------------|
| Output | | | | | |
| Power Capacity | 500 W/750 VA | 700W / 1000VA | 1000W / 1500VA | 1980 W/2200 VA | 2700 W/3000 VA |
| Nominal output voltage | 230 V (configurable to 220 or 240 V nominal) | | | | |
| Output frequency | 47 – 53 Hz for 50 Hz nominal; 57 – 63 Hz for 60 Hz nominal | | | | |
| Waveform type | Sine wave | | | | |
| Output connections (NEMA) | (4) IEC320 C13 | | | (8) IEC320 C13, (1) IEC320 C19 | |
| Switched outlet groups | 1 | | | | |
| Input | | | | | |
| Nominal input voltage | 230V | | | | |
| Input voltage range for main operations (Max adjustable) | 160 – 286V (Max adjustable 150 – 300V) | | | | |
| Input frequency | 50/60 Hz +/-3 Hz (auto sensing) | | | | |
| Input connection | IEC320 C14 | | | IEC320 C20 | |
| Batteries and runtime | | | | | |
| Battery type | Maintenance-free sealed lead-acid battery with suspended electrolyte; leak proof | | | | |
| Replacement battery | APCRBC123 | APCRBC132 | APCRBC133 | RBC43 | |
| Runtime estimates | | | | | |
| 200W | :24 | 1:10 | 1:32 | 1:24 | 1:26 |
| 500W | :05 | :17 | :26 | :35 | :38 |
| 700W | - | :09 | :14 | :24 | :26 |
| 1000W | - | - | :07 | :15 | :17 |
| 1400W | - | - | - | :09 | :11 |
| 1600W | - | - | - | :07 | :09 |
| Full load | :06 | :09 | :04 | :05 | :03 |
| Communications and management | | | | | |
| APC SmartConnect Enabled | Yes | | | Yes | |
| Interface ports | Serial (RJ45), USB, and SmartSlot “NC” versions have AP9631 network management card pre-installed in the SmartSlot | | | | |
| Control panel and audible alarms | Alpha-numeric LCD display with LED status indicators; alarm on battery, distinctive low battery alarm and configurable delays | | | | |
| Emergency power off (EPO) | Optional | | | Yes | |
| Physical | | | | | |
| Maximum height (millimeter) | 86 | 86 | 86 | 86 | 86.1 |
| Maximum width (millimeter) | 432 | 432 | 432 | 480 | 480 |
| Maximum depth (millimeter) | 409 | 477 | 477 | 683 | 683 |
| Net weight (kilograms) | 21.23 | 27.1 | 27.8 | 42.31 | 44.28 |
| Conformance | | | | | |
| Regulatory | RCM, CE, EN62040-1, EN62040-2, EAC, VDE | | | | |