



SITOR FUSE-LINK FOR SEMICONDUCTOR PROTECTION 40A GR, AC 690V, DC 700V SIZE 000, BRACKETS 80MM

Figure similar

Model		
product brand name		SETRON
Design of an identification indicator		front indicator
Design of the fuse link		SITOR, LV HRC design
General technical data		
Size of fuse system / acc. to DIN EN 60269-1		NH000
Operating class of the fuse link		gR
circuit-breaker / Design		3NE
Varying load factor (WL)		0.9
Supply voltage / for DC	V	440
Switching capacity		
Switching capacity current		
• for DC / acc. to IEC 60947-2 / Rated value	kA	50
• acc. to IEC 60947-2 / Rated value	kA	200
Dissipation		
Active power loss		
• for rated value of the current / with AC / in hot operating state / per pole	W	12
Electricity		
rated current I _n / IEC, DIN/VDE / at 40 Cel	A	40
Current / with AC / Rated value	A	40
Mechanical Design		
mounting position		Any, preferably vertical

Environmental conditions

Ambient temperature

- | | | |
|-----------|----|-----|
| • minimum | °C | -20 |
| • maximum | °C | 50 |

Certificates

Equipment marking

- | | |
|--------------------------|---|
| • acc. to DIN EN 61346-2 | F |
| • acc. to DIN EN 81346-2 | F |

General Product Approval

Declaration of Conformity



CSA



GOST



UL



EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NE87021>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NE87021/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=3NE87021

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

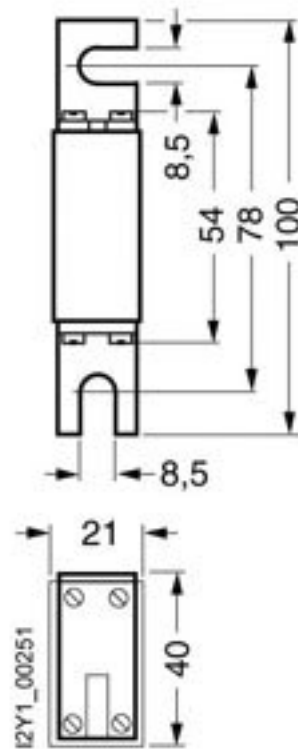

last modified:

05.05.2015