
Dimensions: [mm]

Recommended Hole Pattern: [mm] Absolute Maximum Ratings (Ambient Temperature 25°C): Properties **Test conditions** Value Unit 9,84 **Power Dissipation** P_{Diss} 52 mW 2.46 **Peak Forward Current** duty/ 10 @ 1 kHz 100 I_{F Peak} mΑ detail A --0-**Continuous Forward Current** 20 mΑ Ο 5 V_{REV} 5 V Color Code **Reverse Voltage** Match Size Circuitry Ф 15,24 Code **ESD Threshold/ Human Body** V 1000 V_{ESD HBM} Model 10 O ۍ. **Optical Properties:** + Chip Technology AllnGaP/GaAs φΦ Ф Ð é 12,6 ±0,25 **Emitting Color** Super Red А Surface Color Grev √*[_]* 355 = 855 and Scale - 1,5:1 Segment Color Milky Circuitry Common Cathode **Segments Feature & Pin Position:** 8,0 ±0,25 Φ 0,51 ±0,1 4,3 ±0,5 Pin 10 Pin 6 **General Information:** А **Operating Temperature** -40 up to +85 °C 6 10 **Storage Conditions (for single** -40 up to +85 °C parts) 45 ±0,25 ±0,25 G Storage Conditions (in original < 40 °C : < 75 % RH packaging) 14,2 0 ດ໌ Moisture Sensitivity Level (MSL) DP 1 D +1 5 ,35 Pin 1 Scale - 1,5:1 Pin 5 **Product Marking:** Marking Matchcode T7DS CHECKED REVISION GENERAL TOLERANCE PROJECTION METHOD DATE (YYYY-MM-DD) Marking Size 056 F PLD 001.002 2023-05-27 DIN ISO 2768-1m Marking Color-Code S DESCRIPTION RoHS COMPLIANT REACh COMPLIANT HALOGEN С Marking Circuitry WL-T7DS 7 Segments Display THT Marking - Lot Number Lot number Würth Elektronik eiSos GmbH & Co. KG **Single Digit** ORDER CODE EMC & Inductive Solutions WÜRTH Max-Eyth-Str. 1 157142S12703 **ELEKTRONIK** 74638 Waldenburg Germany MORE THAN Tel. +49 (0) 79 42 945 - 0 SIZE/TYPE BUSINESS UNIT STATUS PAGE YOU EXPECT www.we-online.com 0.56" eiPal PCN 1/11

This electronic component has been designed and developed for usage in general electronic equipment only. This product is net authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik eiSos GmbH Co KG products are neither designed nor intended for use in rarsportation, submarine, transportation, transported transportation, transportation, transportation, transportati

eiSos@we-online.com

Schematic:

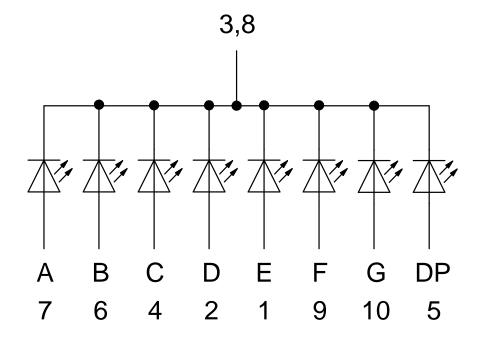

Pin No

1Anode E2Anode D3Common cathode4Anode C5Anode DP6Anode B7Anode A8Common cathode9Anode F		
3Common cathode4Anode C5Anode DP6Anode B7Anode A8Common cathode9Anode F	1	Anode E
4Anode C5Anode DP6Anode B7Anode A8Common cathode9Anode F	2	Anode D
5Anode DP6Anode B7Anode A8Common cathode9Anode F	3	Common cathode
6Anode B7Anode A8Common cathode9Anode F	4	Anode C
7 Anode A 8 Common cathode 9 Anode F	5	Anode DP
8 Common cathode 9 Anode F	6	Anode B
9 Anode F	7	Anode A
	8	Common cathode
	9	Anode F
10 Anode G	10	Anode G

	🚱 🕖 🙆 🗻		CHECKED PLD	REVISION 001.002	DATE (YYYY-MM-DD) 2023-05-27	general tolerance DIN ISO 2768-1m		PROJECTION METHOD	$- \bigcirc ($	€-
	Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions WÜRTH Max-Eyth-Str. 1 ELEKTRONIK 74638 Waldenburg			WL-T7DS 7 Segments Display THT						
			Single	Digit			ORDER CODE	142S12	2703	
	MORE THAN YOU EXPECT	Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	SIZE/TYPE 0.56"			BUSINESS UNIT eiPal	status PCN		1	PAGE 2/11

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus the runterioa circuits that must control such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus that must and require high safety and reliability an


Electrical & Optical Properties:

Properties		Test conditions	Value					
rioperues		Test conultions	min.	typ.	max.	- Unit		
Dominant Wavelength	λ_{Dom}	20 mA		635		nm		
Luminous Intensity	Ι _V	10 mA		20		mcd		
Luminous Intensity	Ι _V	20 mA		38		mcd		
Forward Voltage	V _F	20 mA		2	2.6	V		
Spectral Bandwidth	Δλ	20 mA		20		nm		
Reverse Current	I _{REV}	5 V			100	μA		
Luminous Intensity Matching Ratio		10 mA		1:2				

Certification:

RoHS Approval	Compliant [2011/65/EU&2015/863]
REACh Approval	Conform or declared [(EC)1907/2006]
Halogen Free	Conform [JEDEC JS709B]
Halogen Free	Conform [IEC 61249-2-21]
ESD Approval	Yes


Spectral:

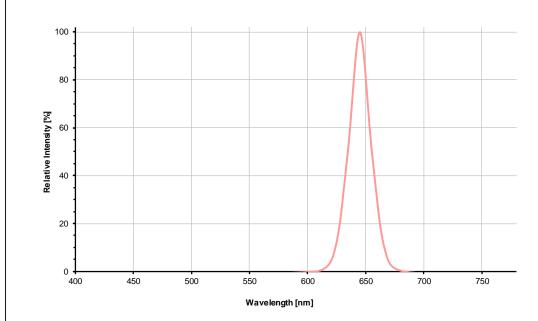



This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel


Forward Current vs. Forward Voltage:

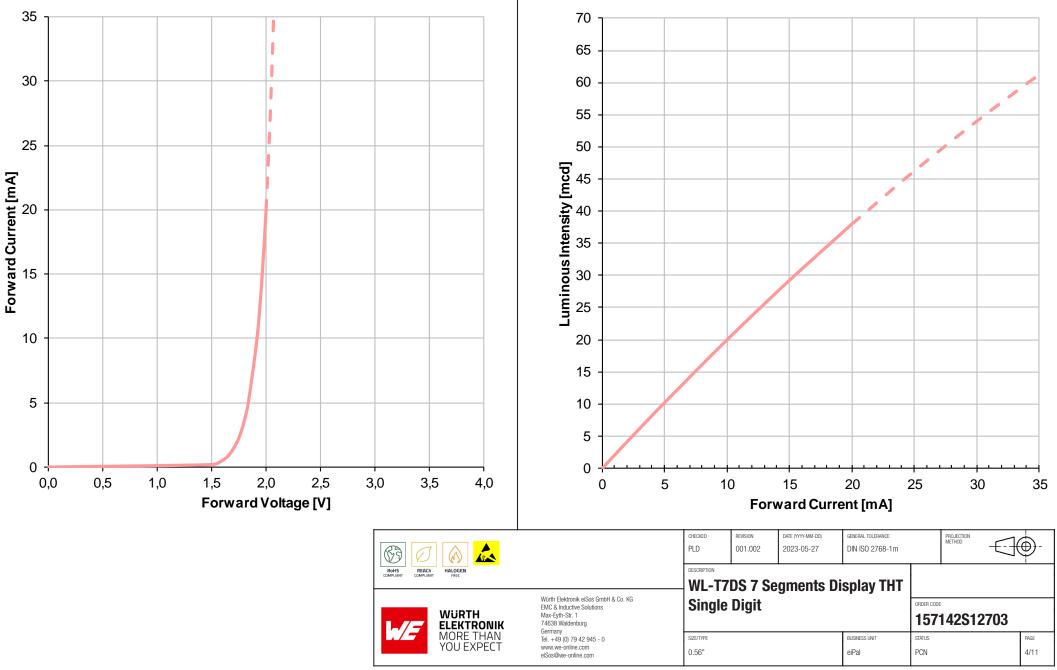

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

Luminous Intensity vs. Forward Current:



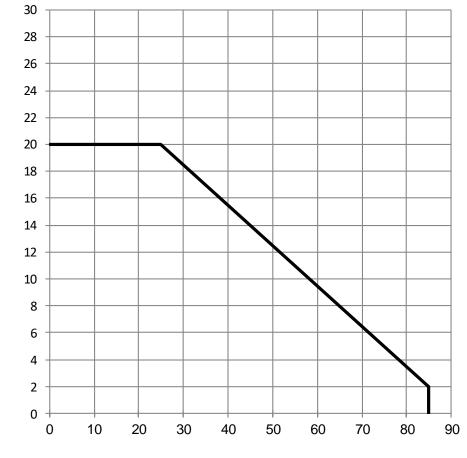


Ambient Temperature [°C]




This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

Forward Current [mA]

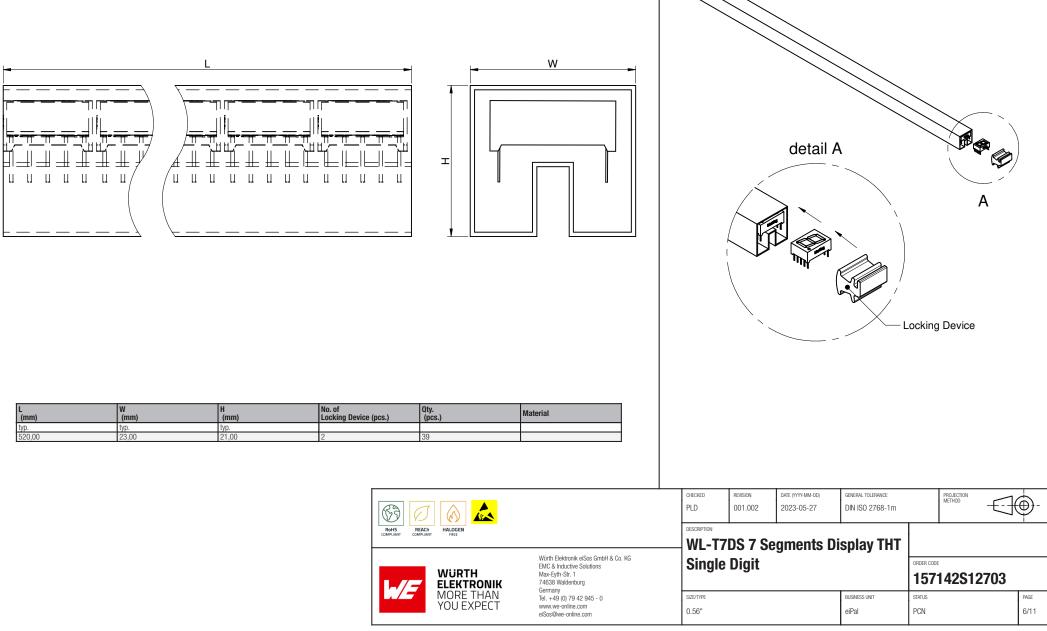

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

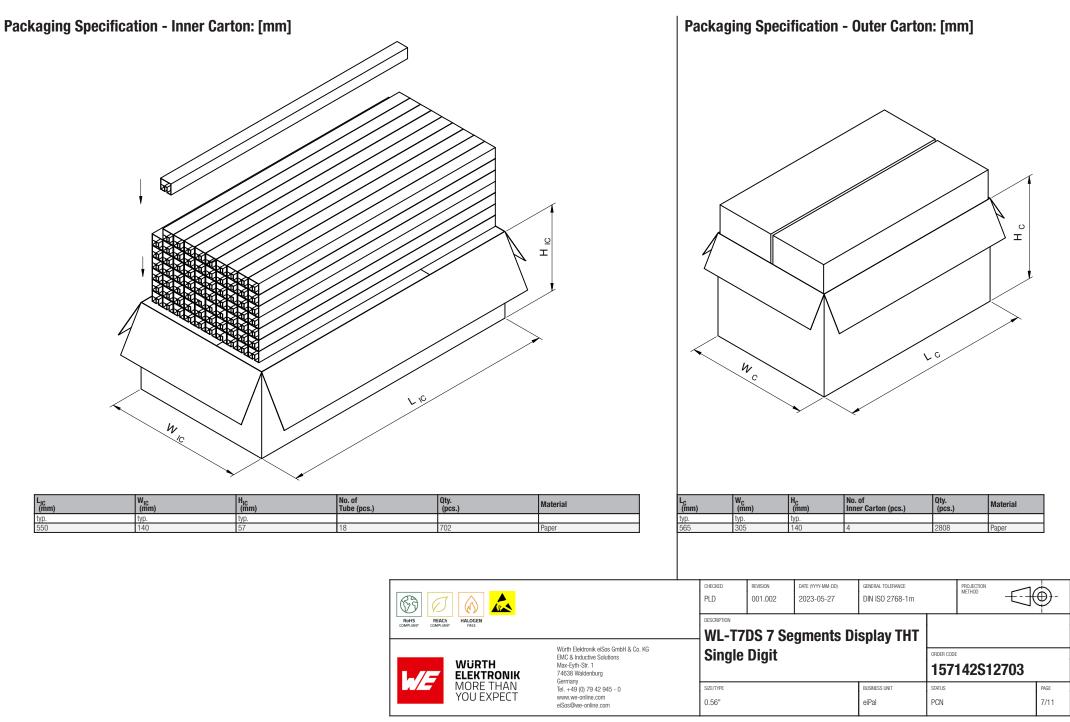

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

Classification Wave Soldering Profile:



---- max temperature procedure

Classification Wave Soldering Profile:

Profile Feature		Pb-Free Assembly	Sn-Pb Assembly
Preheat Temperature Min	T _{s min}	100 °C	100 °C
Preheat Temperature Typical	T _{s typical}	120 °C	120 °C
Preheat Temperature Max	T _{s max}	130 °C	130 °C
Preheat Time t_s from T_{smin} to T_{smax}	t _s	70 seconds	70 seconds
Ramp-up Rate	ΔT	150 °C max.	150 °C max.
Peak Temperature	Т _р	245 °C - 260 °C	235 °C - 260 °C
Time of actual peak temperature	tp	5-8 seconds max.	3-6 seconds max.
Ramp-down Rate, Min		~ 2 K/ second	~ 2 K/ second
Ramp-down Rate, Typical		~ 3.5 K/ second	~ 3.5 K/ second
Ramp-down Rate, Max		~ 5 K/ second	~ 5 K/ second
Time 25 °C to 25 °C		4 minutes	4 minutes
Applied cycles		1 cycle max.	

refer to EN61760-1:2006

B O A		CHECKED	REVISION 001.002	DATE (YYYY-MM-DD) 2023-05-27	general tolerance DIN ISO 2768-1m		PROJECTION METHOD	\square) -
		WL-T7DS 7 Segments Display THT							
	WURTH Max-Eyth-Str. 1 ELEKTRONIK 74638 Waldenburg		Digit			ORDER CODE	142S127	703	
MORE THAN YOU EXPECT	Germany Tel: +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com	SIZE/TYPE 0.56"			BUSINESS UNIT eiPal	status PCN		1	PAGE 8/11

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus the runterioa circuits that must control such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus that must and require high safety and reliability an

Cautions and Warnings:

The following conditions apply to all goods within the product series of Optoelectronic Components of Würth Elektronik eiSos GmbH & Co. KG:

General:

- This optoelectronic component is designed and manufactured for use in general electronic equipment.
- Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any
 equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control,
 ship control), transportation signal, disaster prevention, medical, public information network, etc. where higher safety and reliability are
 especially required and/or if there is the possibility of direct damage or human injury.
- Optoelectronic components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
- The optoelectronic component is designed and manufactured to be used within the datasheet specified values. If the usage and
 operation conditions specified in the datasheet are not met, the wire insulation may be damaged or dissolved.
- Do not drop or impact the components, the component may be damaged
- Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth
 Elektronik does not warrant any customer qualified product characteristics beyond Würth Elektroniks' specifications, for its validity and
 sustainability over time.
- The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products also apply to customer specific products.

Product specific:

Soldering:

- The solder profile must comply with the technical product specifications. All other profiles will void the warranty.
- All other soldering methods are at the customers' own risk.

Cleaning and Washing:

- Washing agents used during the production to clean the customer application might damage or change the characteristics of the
 optoelectronic component body, marking or plating. Washing agents may have a negative effect on the long-term functionality of the
 product.
- Using a brush during the cleaning process may break the optoelectronic component body. Therefore, we do not recommend using a brush during the PCB cleaning process.

Potting:

If the product is potted in the customer application, the potting material might shrink or expand during and after hardening. Shrinking
could lead to an incomplete seal, allowing contaminants into the optoelectronic component body, pins or termination. Expansion could
damage the components. We recommend a manual inspection after potting to avoid these effects.

Storage Conditions:

- A storage of Würth Elektronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- Do not expose the optoelectronic component to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.
- For a moisture sensitive component, the storage condition in the original packaging is defined according to IPC/JEDEC-J-STD-033. It is
 also recommended to return the optoelectronic component to the original moisture proof bag and reseal the moisture proof bag again.
- The storage conditions stated in the original packaging apply to the storage time and not to the transportation time of the components.

Packaging:

• The packaging specifications apply only to purchase orders comprising whole packaging units. If the ordered quantity exceeds or is lower than the specified packaging unit, packaging in accordance with the packaging specifications cannot be ensured.

Handling:

- Violation of the technical product specifications such as exceeding the nominal rated current, will void the warranty.
- The product design may influence the automatic optical inspection.
- Certain optoelectronic component surfaces consist of soft material. Pressure on the top surface has to be handled carefully to prevent negative influence to the function and reliability of the optoelectronic components.
- ESD prevention methods need to be applied for manual handling and processing by machinery.
- Resistors for protection are obligatory.
- Luminaires in operation may harm human vision or skin on a photo-biological level. Therefore direct light impact shall be avoided. All
 products are additionally certified as risk groups 0 to 2 according to DIN EN 62471:2008.
- In addition to optoelectronic components testing, products incorporating these devices have to comply with the safety precautions given in IEC 60825-1, IEC 62471 and IEC 62778
- Please be aware that Products provided in bulk packaging may get bent and might lead to derivations from the mechanical manufacturing tolerances mentioned in our datasheet, which is not considered to be a material defect.

Technical specification:

- The typical and/or calculated values and graphics of technical parameters can only reflect statistical figures. The actual parameters of each single product, may differ from the typical and/or calculated values or the typical characteristic line.
- On each reel, only one bin is sorted and taped. The bin is defined on intensity, chromaticity coordinate or wavelength and forward

		CHECKED	REVISION 001.002	DATE (YYYY-MM-DD) 2023-05-27	general tolerance DIN ISO 2768-1m	PRO		⊕-
		DESCRIPTION	DS 7 Se	gments Di				
WURTH	Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1	Single	Digit				0010700	
ELEKTRONIK MORE THAN	74638 Waldenburg Germany					15/14	2S12703	

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic actions that the rule in their design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic rule in this that of used in electronic rule in this addition, and reliability functions or performance.

voltage.

- In order to ensure highest availability, the reel binning of standard deliveries can vary. A single bin cannot be ordered. Please contact us
 in advance, if you need a particular bin sorting before placing your order.
- Test conditions are measured at the typical current with pulse duration < 30ms.
- Wavelength tolerance under measurement conditions ± 2nm.
- Optical intensity tolerance under measurement conditions ±15%.
- Forward voltage tolerance under measurement conditions ± 0.2V.

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

6		CHECKED	REVISION 001.002	DATE (YYYY-MM-DD) 2023-05-27	general tolerance DIN ISO 2768-1m		PROJECTION METHOD		+-
COMPLIANT COMPLIANT FREE		WL-T7DS 7 Segments Display THT							
Würt Elektronik elöss GmbH & Co. KG EMC & Inductive Solutions WÜRTH ELEKTRONIK 74638 Waldenburg			Digit			ORDER CODE	142S1270	13	
MORE THAN YOU EXPECT		size/type 0.56"			BUSINESS UNIT eiPal	status PCN		PAGE 10/1	

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricia circuits that require high astept and reliability intended on use in equipment. Wurth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricia circuits that require high astept and reliability intended on user and reliability and reliability intended on user and reliability and reliability intended on user and reliability intended on user and reliability intended about the intent of such usage before the design-in stage. In addition, sufficient reliability and reliability intended on user and reliability and reliability intended on user and reliability and reliability intended on user and reliability and reliability intended on user and reliability and re

Important Notes

The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

B 0 6 🛦		CHECKED PLD	REVISION 001.002	DATE (YYYY-MM-DD) 2023-05-27	GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD	_ -
ROHS REACH HALOGEN COMPLIANT COMPLIANT FREE				gments Di				
	Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany	Single	Digit			ORDER CODE	42 S 12703	
MORE THAN YOU EXPECT	Tell. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	size/type 0.56"			BUSINESS UNIT eiPal	status PCN		PAGE 11/11

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic circuits that require high asteging and reliability functions or performance.