Technical Data Sheet

0805 Package Chip LED (1.0m Height)

17-21SURC/S530-XX/TR8

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain with in RoHS complaint version

Descriptions

- The 17-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

| Part No. | Chip Material | Emitted Color | Resin Color | |
|-----------------------|------------------|---------------|-------------|--|
| 17-21SURC/S530-XX/TR8 | AlGaInP | Brilliant Red | Water Clear | |



Everlight Electronics Co., Ltd. Device No:SZDSE-171-019

P

http://www.everlight.com


Rev. 2


Page: 1 of 9


Prepared date: 27-Oct-2007

Prepared by: Zhouhua


Package Outline Dimensions








For reflow soldering (Propose)





Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Absolute Maximum Ratings (Ta=25°C)

| Parameter | Symbol | Rating | Unit |
|--|------------------|---|------------------------|
| Reverse Voltage | V_R | 5 | V |
| Forward Current | I_{F} | 25 | mA |
| Peak Forward Current (Duty 1/10 @1KHz) | ${ m I_{FP}}$ | 60 | mA |
| Power Dissipation | P_d | 60 | mW |
| Electrostatic Discharge(HBM) | ESD | 2000 | V |
| Operating Temperature | Topr | - 40 ∼ +85 | $^{\circ}\!\mathbb{C}$ |
| Storage Temperature | Tstg | -40 ~ +90 | $^{\circ}\!\mathbb{C}$ |
| Soldering Temperature | Tsol | Reflow Soldering:260 °C for 10 sec Hand Soldering:350°C for 3 sec | |

Electro-Optical Characteristics (Ta=25°C)

| Parameter | Symbol | *Chip Rank | Min. | Тур. | Max. | Unit | Condition |
|------------------------------|----------------------|---------------|------|------|------|------|---------------------|
| Luminous Intensity | $I_{ m v}$ | A2 | 15 | 38 | | mcd | |
| | | A3 | 40 | 60 | | | |
| | | A4 | 50 | 75 | | | |
| | | A5 | 60 | 90 | | | |
| | | A6 | 85 | 123 | | | |
| Viewing Angle | $2	heta_{	ext{1/2}}$ | | | 140 | | deg | $I_F=20 \text{ mA}$ |
| Peak Wavelength | λp | | | 632 | | nm | |
| Dominant Wavelength | λd | | | 624 | | nm | |
| Spectrum Radiation Bandwidth | Δλ | | | 20 | | nm | |
| Forward Voltage | V_{F} | | | 2.0 | 2.4 | V | |
| Reverse Current | I_R | | | | 10 | μΑ | V _R =5V |

Everlight Electronics Co., Ltd. Device No:SZDSE-171-019


http://www.everlight.com

Prepared date: 27-Oct-2007

Page: 3 of 9

Rev. 2 Page Prepared by: Zhouhua

Typical Electro-Optical Characteristics Curves

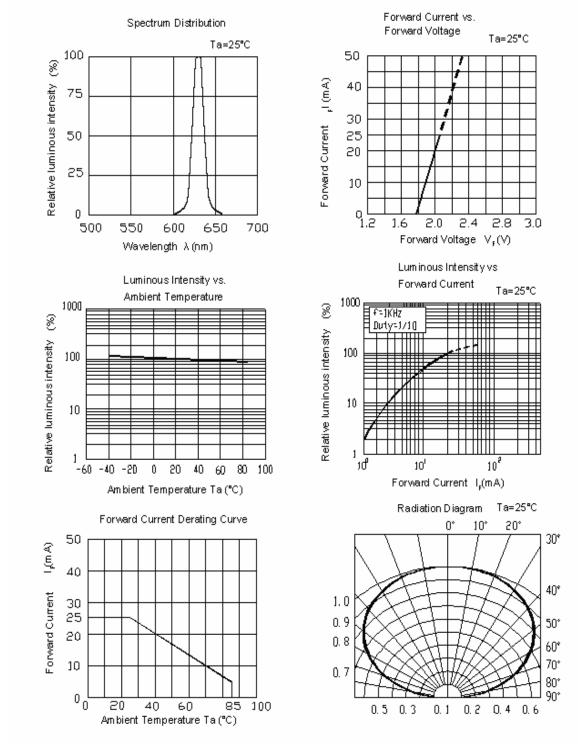

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank




Reel Dimensions




Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

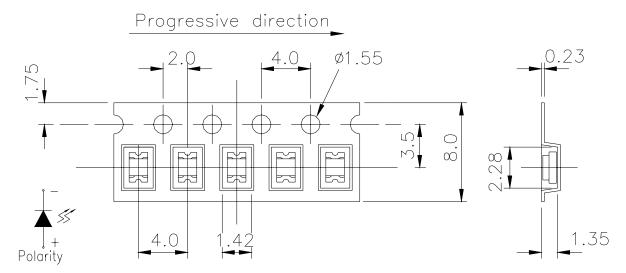

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

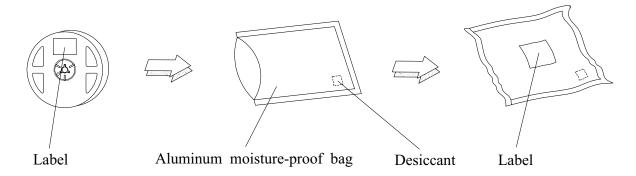

Prepared by: Zhouhua

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

| No. | Items | Test Condition | Test Hours/Cycles | Sample Size | Ac/Re |
|-----|-------------------------------------|---|----------------------|----------------|-------|
| 1 | Reflow Soldering | Temp. : 260°C±5°C Min. 5sec. | 6 Min. | 22 PCS. | 0/1 |
| 2 | Temperature Cycle | $H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min | 300 Cycles | 22 PCS. | 0/1 |
| 3 | Thermal Shock | $H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min | 300 Cycles | 22 PCS. | 0/1 |
| 4 | High Temperature Storage | Temp. : 100°C | 1000 Hrs. | 22 PCS. | 0/1 |
| 5 | Low Temperature Storage | Temp. : -40°C | 1000 Hrs. | 22 PCS. | 0/1 |
| 6 | DC Operating Life | $I_F = 20 \text{ mA}$ | 1000 Hrs. | 22 PCS. | 0/1 |
| 7 | High Temperature / High Humidity | 85°C / 85%RH | 1000 Hrs. | 22 PCS. | 0/1 |

Everlight Electronics Co., Ltd. Device No:SZDSE-171-019

http://www.everlight.com Prepared date: 27-Oct-2007 Rev. 2

Page: 7 of 9

Prepared by: Zhouhua

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH orless. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile



- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. Device No:SZDSE-171-019

http://www.everlight.com Prepared date: 27-Oct-2007

Page: 8 of 9

Prepared by: Zhouhua

Rev. 2




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

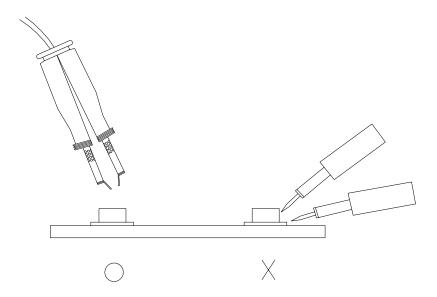

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 9 of 9

Device No:SZDSE-171-019 Prepared date: 27-Oct-2007 Prepared by: Zhouhua