DATASHEET - EMS2-D0-Z-2,4-24VDC



DOL starter, 24 V DC, 0,18 - 2,4 A, Screw terminals

4100399

Part no. EMS2-D0-Z-2,4-24VDC Catalog No. 197160

Alternate Catalog

EL-Nummer (Norway)

EMS2-D0-Z-2,4-24VDC





Delivery program Product range Electronic motor starter Basic function DOL starters (complete devices) Description DOL starting Motor protection Circuit design: safety output stage with bypass, three-phase disconnect. **Motor ratings** Max. rating for three-phase motors, 50 - 60 Hz 380 V 400 V 415 V kW 0.06 - 0.75 Setting range of overload releases 0,18 - 2,4 A_x 24 V DC Actuating voltage Connection technique Screw terminals Connection to SmartWire-DT

Technical data

Operating voltage range min.

General			
Standards			IEC/EN 60947-4-2 UL508
Ambient temperature			
Storage		°C	
Min. ambient temperature, storage		°C	- 40
Ambient temperature, storage max.		°C	+ 80
Open		°C	
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	+ 70
Weight		kg	0.22
Mounting			Top-hat rail IEC/EN 60715, 35 mm
Protection type (IEC/EN 60529, EN50178, VBG 4)			IP20
Mounting position			Vertical Motor feeder at bottom
Terminal capacity			
Screw terminals			
Terminal capacity main cable			
		mm^2	0.2 - 2.5
		AWG	24 - 14
Terminal capacity control circuit cables			
		mm^2	0.14 - 2.5
		AWG	26 - 14
tightening torque		N/m	0.5 - 0.6
Main conducting paths			
Rated operational voltage	U _e	V AC	500
Operational voltage range		V	

42

Operating voltage range max.		V	550
Rated operational current			
	l _e	A	2.4
	l _e	A	2.4
AC-33d	'e	A	
Continuous of supplied selection		Δ	AC-53a: Please note possible derating.
	l _r	A_x	0,18 - 2,4
Release class		CLASS	10
	P_V	W	1.1 - 3.3
Control section		W D O	
	U _s	V DC	24
Control voltage range		V	19,2 - 30 V DC
Residual ripple on the input voltage		%	≦5
Rated control current	Is	mA	40
Actuating circuit (ON, L, R)			
Rated actuation voltage	U _c	V	24
Switching level "Low"		V	-3 - +9.6 V DC
Switching level "confirm Off"		V	< 5 V DC
Switching level "High"		V	19.2 - 30 V DC
Rated actuating current	Ic	mA	5
Relay outputs			
Contacts			
CO = changeover			100
Rated operational current			
AC-15			
230 V	l _e	Α	3
DC-13			
24 V	I _e	Α	2

Notes

Radio interference suppression	EN 55011 EN 61000-6-3, Class A (emitted interference, radiated)
Technical safety parameters:	

motor protection

Design verification as per IEC/EN 61439

boolgii voi moddion do por 120/211 or 100			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	2.4
Heat dissipation per pole, current-dependent	P_{vid}	W	0
Equipment heat dissipation, current-dependent	P _{vid}	W	3.3
Static heat dissipation, non-current-dependent	P_{vs}	W	1
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
			If necessary, Allow for derating
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.

10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Motor starter/Motor starter combination (EC001037)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Motor starter combination (ecl@ss10.0.1-27-37-09-05 [AJZ718013])


[AJZ/18013])		
Kind of motor starter		Direct starter
With short-circuit release		No
Rated control supply voltage Us at AC 50HZ	V	0 - 0
Rated control supply voltage Us at AC 60HZ	V	0 - 0
Rated control supply voltage Us at DC	V	24 - 24
Voltage type for actuating		DC
Rated operation power at AC-3, 230 V, 3-phase	kW	0.37
Rated operation power at AC-3, 400 V	kW	0.75
Rated power, 460 V, 60 Hz, 3-phase	kW	0
Rated power, 575 V, 60 Hz, 3-phase	kW	0
Rated operation current le	Α	2.4
Rated operation current at AC-3, 400 V	Α	2.4
Overload release current setting	А	0.18 - 3
Rated conditional short-circuit current, type 1, 480 Y/277 V	Α	0
Rated conditional short-circuit current, type 1, 600 Y/347 V	Α	0
Rated conditional short-circuit current, type 2, 230 V	А	0
Rated conditional short-circuit current, type 2, 400 V	А	0
Number of auxiliary contacts as normally open contact		1
Number of auxiliary contacts as normally closed contact		1
Ambient temperature, upper operating limit	°C	60
Temperature compensated overload protection		Yes
Release class		CLASS 10
Type of electrical connection of main circuit		Screw connection
Type of electrical connection for auxiliary- and control current circuit		Screw connection
Rail mounting possible		Yes
With transformer		No
Number of command positions		
Suitable for emergency stop		No
Coordination class according to IEC 60947-4-3		
Number of indicator lights		3
External reset possible		Yes
With fuse		No
Degree of protection (IP)		IP20
Degree of protection (NEMA)		Other
Supporting protocol for TCP/IP		No
Supporting protocol for PROFIBUS		No

Supporting protocol for CAN		No
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for MODBUS		No
Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		No
Supporting protocol for SUCONET		No
Supporting protocol for LON		No
Supporting protocol for PROFINET IO		No
Supporting protocol for PROFINET CBA		No
Supporting protocol for SERCOS		No
Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		No
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFIsafe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for other bus systems		No
Width	mm	22.5
Height	mm	106.8
Depth	mm	113.6

Approvals

Product Standards	UL 60947-4-1; CSA C22.2 No. 60947-4-1-14; CE marking
UL File No.	E29096
UL Category Control No.	NLDX, NLDX7
CSA File No.	UL report applies to both US and Canada
North America Certification	UL listed, certified by UL for use in Canada
Specially designed for North America	No

Characteristics

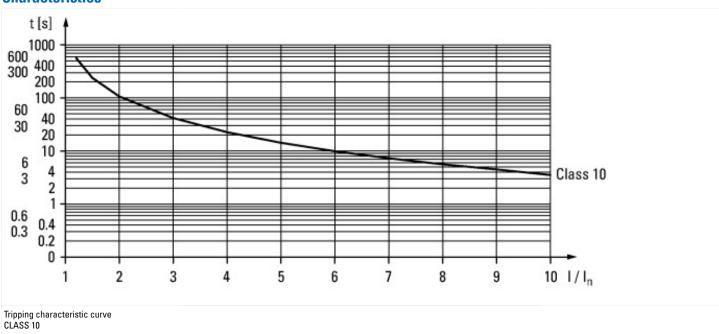

Dimensions

