# **SIEMENS**

Data sheet 3RM1207-1AA04

MOTOR STARTER SIRIUS 3RM1 REVERSING STARTER 500 V; 1,6-7,0 A; 24 V DC SCREW-TYPE CONNECTION SYSTEM



Figure similar

General technical data				
product brandname	SIRIUS			
Product category	Motor starter			
Product designation	Reversing starter			
Design of the product	with electronic overload protection			
Trip class	CLASS 10A			
Protection class IP	IP20			
Suitability for operation Device connector 3ZY12	Yes			
Product function Intrinsic device protection	Yes			
Type of the motor protection	solid-state			
Product function Adjustable current limitation	Yes			
Installation altitude at height above sea level maximum	4 000 m			
Ambient temperature				
<ul><li>during operation</li></ul>	-25 +60 °C			
<ul> <li>during transport</li> </ul>	-40 +70 °C			
during storage	-40 +70 °C			
Relative humidity during operation	10 95 %			

Air pressure acc. to SN 31205	900 1 060 hPa			
Shock resistance	6g / 11 ms			
Vibration resistance	1 6 Hz, 15 mm; 20 m/s², 500 Hz			
Surge voltage resistance rated value	6 kV			
Insulation voltage rated value	500 V			
Mechanical service life (switching cycles) typical	30 000 000			
Conducted interference				
<ul> <li>due to conductor-conductor surge acc. to IEC 61000-4-5</li> </ul>	1 kV			
<ul> <li>due to conductor-earth surge acc. to IEC 61000-4-5</li> </ul>	2 kV			
• due to burst acc. to IEC 61000-4-4	3 kV / 5 kHz			
<ul> <li>due to high-frequency radiation acc. to IEC 61000-4-6</li> </ul>	10 V			
Electrostatic discharge acc. to IEC 61000-4-2	4 kV contact discharge / 8 kV air discharge			
Field-bound HF-interference emission acc. to CISPR11	Class B for the domestic, business and commercial environments			
Conducted HF-interference emissions acc. to CISPR11	Class B for the domestic, business and commercial environments			
maximum permissible voltage for safe isolation				
<ul> <li>between main and auxiliary circuit</li> </ul>	500 V			
<ul> <li>between control and auxiliary circuit</li> </ul>	250 V			
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	Q			
Equipment marking acc. to DIN EN 61346-2	Q			

Safety related data			
Protection against electrical shock	finger-safe		
Main circuit			
Number of poles for main current circuit	3		
Operating voltage rated value	48 500 V		
Relative symmetrical tolerance of the operating voltage	10 %		
Operating frequency			
• 1 rated value	50 Hz		
• 2 rated value	60 Hz		
Relative symmetrical tolerance of the operating frequency	10 %		
Operating current at AC-53a at 400 V at ambient temperature 40 °C rated value	7 A		
Derating temperature	40 °C		
Minimum load [% of IM]	20 %		
Power loss [W] typical	3.4 W		
Adjustable pick-up value current of the current- dependent overload release	1.6 7 A		

On another the control of the control of 100 V of	0.55 0.13M			
Operating power for three-phase motors at 400 V at 50 Hz	0.55 3 kW			
Operating frequency maximum	1 1/s			
Control circuit/ Control				
Type of voltage of the control supply voltage	DC			
Control supply voltage 1				
at DC rated value	24 V			
Operating range factor control supply voltage rated				
value				
• at DC	0.8 1.25			
Control current				
• at DC				
— in standby mode	25 mA			
— during operation	70 mA			
— when switching on	150 mA			
Input voltage at digital input				
● for signal <1>				
— at DC	15 30 V			
• with signal <0>				
— at DC	0 5 V			
Input current at digital input				
• for signal <1>				
— at DC	11 mA			
• with signal <0>				
— at DC	1 mA			
Switch-on delay time	60 90 ms			
Off-delay time	60 90 ms			
Auxiliary circuit				
Number of CO contacts for auxiliary contacts	1			
Design of the switching contact as NO contact for signaling function	OUT, electronic, 24 V DC, 15 mA			
Operating current of auxiliary contacts				
• at AC-15 at 230 V maximum	3 A			
• at DC-13 at 24 V maximum	1 A			
Installation/ mounting/ dimensions				
Mounting position	vertical, horizontal, standing			
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail			
Width	22.5 mm			
Height	100 mm			
Depth	141.6 mm			
Connections/Terminals				

Type of electrical connection				
• for main current circuit	screw-type terminals			
<ul> <li>for auxiliary and control current circuit</li> </ul>	screw-type terminals			
Type of connectable conductor cross-sections for main contacts				
• solid	1x (0,5 4 mm²), 2x (0,5 2,5 mm²)			
• finely stranded				
— with core end processing	1x (0,5 4 mm²), 2x (0,5 1,5 mm²)			
Type of connectable conductor cross-sections at AWG conductors for main contacts	1x (20 12), 2x (20 14)			
Type of connectable conductor cross-sections for auxiliary contacts				
• solid	1x (0,5 2,5 mm²), 2x (1,0 1,5 mm²)			
• finely stranded				
— with core end processing	1x (0.5 2.5 mm²), 2x (0.5 1 mm²)			
Type of connectable conductor cross-sections at AWG conductors for auxiliary contacts	1x (20 14), 2x (18 16)			

UL ratings	
Full-load current (FLA) for three-phase AC motor at	6.1 A
480 V rated value	
Yielded mechanical performance [hp]	
<ul> <li>for single-phase AC motor</li> </ul>	
— at 110/120 V rated value	0.25 hp
— at 230 V rated value	0.5 hp
<ul> <li>for three-phase AC motor</li> </ul>	
— at 200/208 V rated value	1 hp
— at 220/230 V rated value	1.5 hp
— at 460/480 V rated value	3 hp

## Certificates/approvals

## General Product Approval

Declaration of Conformity













Test Certificates		other		
Typpriifhescheinigu	cnozialla	Umweltheetätigung	Rostätigungen	

Typprüfbescheinigu spezielle ng/Werkszeugnis Prüfbescheinigunge

Umweltbestätigung

Bestätigungen

n

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

### Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1207-1AA04


#### Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RM1207-1AA04


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RM1207-1AA04

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RM1207-1AA04&lang=en



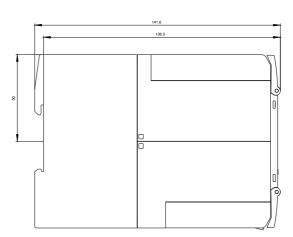

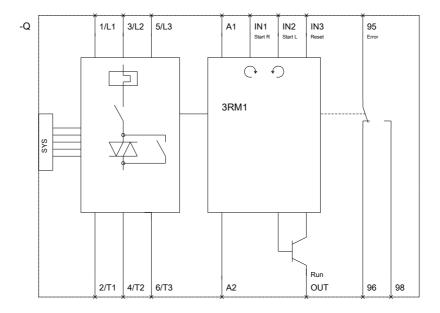

**last modified:** 02/14/2017