

## 2/4-Port USB 3.0 4K DisplayPort KVMP<sup>™</sup> Switch for ATC CS1922ATC / CS1924ATC

The ATEN CS1922ATC / CS1924ATC 2/4-Port USB 3.0 4K DisplayPort KVMP™ Switch for ATC is tailor-made for Air Traffic Control scenarios. It supports 2Kx2K resolution, making it perfect for radar monitoring, and also enables constant monitoring of flight information and mission-critical processes.

The Zero-Second Switch function ensures nearly real-time switching without any black screens, providing air traffic controllers instant access to two or four USB / DisplayPort-interfaced ATC computers for crucial operations. Port switching is flexible via pushbuttons, hotkeys, mouse, RS-232 commands, or an optional accessory the remote port selector.

With two lockable DC jacks for power redundancy, the CS1922ATC / CS1924ATC ensures uninterrupted operation and constant availability for mission-critical applications. It aims to greatly minimize or eliminate the risk of downtime.

Patented ATEN technology – Video DynaSync<sup>™</sup>, and EDID expert<sup>™</sup>, combined with DisplayPort 1.2 and video resolutions up to 4K @ 60 Hz, it delivers optimized display resolution with exceptional detail and clarity in all conditions.

The CS1922ATC / CS1924ATC creates a safer environment and enhanced operational efficiency for Air Traffic Control Towers, Approach Control Rooms, and Area Control Centers, specifically tailored the air traffic control industry.






## **Features**

- One USB / DisplayPort console controls 2/4 DisplayPort computers and shares 2 USB peripherals
- Supports 2048 x 2048 @ 60 Hz screen resolutions dedicated for radar monitoring; maximum resolution up to 4096 x 2160 @ 60 Hz
- Zero-Second Switch provides continuous video stream and real-time switching
- Supports power failover 2 DC jacks for power redundancy to ensure constant availability for mission-critical applications
- Computer Selection via front panel pushbuttons, hotkeys, mouse, RS-232 commands, and remote port selector
- Video DynaSync<sup>™</sup> exclusive ATEN technology eliminates boot-up display problems and optimizes resolutions when switching between ports
- EDID Expert<sup>™</sup> smooth power- up, high-quality display and use of the best video resolution across different screens
- Supports serial port switching for legacy devices
- Built-in 2-port USB 3.1 Gen 1 hub with SuperSpeed 5 Gbps data transfer rates
- DisplayPort 1.2, and HDCP compliant
- Supports HD audio\*
- Console mouse port emulation / bypass feature supports most mouse drivers and multifunction mice
- Console keyboard emulation / bypass feature supports most multimedia keyboards
- Multilingual keyboard mapping supports English, French, Japanese, and German keyboards
- Power on detection
- Auto scan
- Firmware upgradable

Note: HD audio through DisplayPort cannot be switched independently

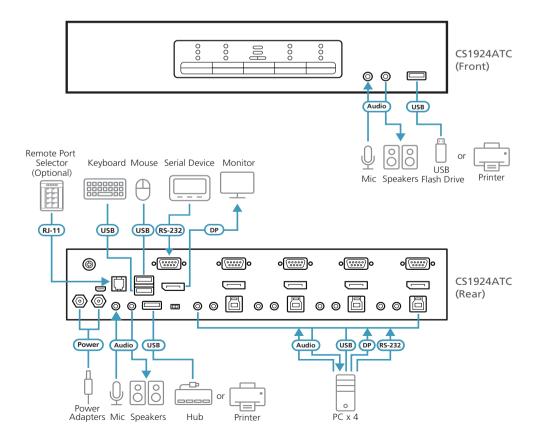



## **Specifications**

|                        | CS1922ATC   | CS1924ATC   |
|------------------------|---|---|
| Computer Connections   | 2   | 4   |
| Port Selection         | Hotkeys, Pushbutton, Mouse, RS2   | 32 commands, Remote Port Selector   |
| Connectors             | ,   |   |
| Console Ports          | 2 x USB Type-A Female (Black)<br>1 x DisplayPort Female (Black)<br>2 x 3.5mm Stereo Jack Female<br>(Green; 1 x front, 1 x rear)<br>2 x 3.5mm Stereo Jack Female<br>(Pink; 1 x front, 1 x rear)<br>1 x DB-9 Male | 2 x USB Type-A Female (Black)<br>1 x DisplayPort Female (Black)<br>2 x 3.5mm Stereo Jack Female<br>(Green; 1 x front, 1 x rear)<br>2 x 3.5mm Stereo Jack Female<br>(Pink; 1 x front, 1 x rear)<br>1 x DB-9 Male |
| KVM (Computer) Ports   | 2 x USB3.1 Gen1 Type-B Female (Blue)<br>2 x DisplayPort Female (Black)<br>2 x 3.5mm Audio Jack Female (Green)<br>2 x 3.5mm Audio Jack Female (Pink)<br>2 x DB-9 Female  | 4 x USB3.1 Gen1 Type-B Female (Blue)<br>4 x DisplayPort Female (Black)<br>4 x 3.5mm Audio Jack Female (Green)<br>4 x 3.5mm Audio Jack Female (Pink)<br>4 x DB-9 Female  |
| Power                  | 2 x DC Jack   |   |
| USB Hub                | 2 x USB3.1 Gen1 Type-A Female (Blue; 1 x front panel; 1 x rear panel)   |   |
| Remote Port Selector   | 1 x RJ-11 Female  |   |
| Firmware Upgrade       | 1 x micro USB Female  |   |
| Switches               |   |   |
| Selected               | 3 x Pushbutton  | 5 x Pushbutton  |
| LEDs                   |   |   |
| USB Link               | 2 (Green)   | 4 (Green)   |
| Audio                  | 2 (Green)   | 4 (Green)   |
| KVM                    | 2 (Orange)  | 4 (Orange)  |
| Emulation              |   |   |
| Keyboard / Mouse       | USB   |   |
| Video                  | Up to 4096 x 2160 @ 60 Hz   |   |
| Power Consumption      | DC 12V: 16.09W  | DC 12V: 16.84W  |
| Environmental          |   |   |
| Operating Temperature  | 0 – 50 °C   |   |
| Storage Temperature    | -20 – 60 °C   |   |
| Humidity               | 0 – 80% RH, Non-Condensing  |   |
| Physical Properties    | 1   |   |
| Housing                | Metal   |   |
| Weight                 | 1.86 kg   | 1.87 kg   |
| Dimensions (L x W x H) | 33.50 x 16.10 x 6.55 cm   |   |

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767 www.aten.com E-mail: marketing@aten.com Product information is subject to change without prior notice.

## Released: 07/2023 V1.0

© Copyright 2023 ATEN® International Co. Ltd. ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd. All rights reserved. All other trademarks are the property of their respective owners.



3