DATASHEET - DILEM12-10(230V50/60HZ)



Delivery program

Contactor, 3p+1N/0, 5.5kW/400V/AC3

Part no.DILEM12-10(230V50/60HZ)Catalog No.127082Eaton Catalog No.XTMC12A10G2

EATON Powering Business Worldwide

Product range Contactors Application **Contactors for Motors** Mini Contactors for Motors and Resistive Loads Subrange **DILEM** contactors Utilization category AC-1: Non-inductive or slightly inductive loads, resistance furnaces NAC-3: Normal AC induction motors: starting, switch off during running AC-4: Normal AC induction motors: starting, plugging, reversing, inching Connection technique Screw terminals With auxiliary contact Description Number of poles 3 pole **Rated operational current** AC-3 380 V 400 V le А 12 AC-1 Conventional free air thermal current, 3 pole, 50 - 60 Hz Open at 40 °C $I_{th} = I_e$ А 22 Max. rating for three-phase motors, 50 - 60 Hz AC-3 220 1/ 220 1/

220 V 230 V	Р	kW	3
380 V 400 V	Р	kW	5.5
660 V 690 V	Р	kW	4
AC-4			
220 V 230 V	Р	kW	1.5
380 V 400 V	Р	kW	3
660 V 690 V	Р	kW	3
Contacts			
N/O = Normally open			1 N/O
Contact sequence			$\begin{array}{c ccccccccccccccccccccccccccccccccccc$
For use with			DILEM DILE
Actuating voltage			230 V 50/60 Hz
Voltage AC/DC			AC operation

Technical data

General			
Standards			IEC/EN 60947, VDE 0660, CSA, UL
Lifespan, mechanical; Coil 50/60 Hz	Operations	x 10 ⁶	5
Lifespan, mechanical	Operations	x 10 ⁶	5
Maximum operating frequency			
Mechanical		Ops./h	9000
electrical (Contactors without overload relay)	Operations/h		Page 05/070
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Open		°C	-25 - +50

Enclosed		°C	- 25 - 40
Storage		°C	
Min. ambient temperature, storage		°C	- 40
Ambient temperature, storage max.		°C	+ 80
Mounting position			As required, except vertical with terminals A1/A2 at the bottom
Mounting position			
Mechanical shock resistance (IEC/EN 60068-2-27) Half-sinusoidal shock, 10 ms			
Basic unit without auxiliary contact module			
Main contacts, make contacts		g	10
Main contacts Make/break contacts		g	
Make		g	8
Basic unit with auxiliary contact module			
Main contacts make contact		g	
Make		g	10
Auxiliary contacts Make/break contacts		g	20 / 20
Degree of Protection			IP20
Protection against direct contact when actuated from front (EN 50274)			Finger and back-of-hand proof
Weight		kg	0.17
Terminal capacity of auxiliary and main contacts			
Screw terminals			
Solid		mm ²	1 x (0.75 - 2.5) 2 x (0.75 - 2.5)
Flexible with ferrule		mm ²	1 x (0.75 - 1.5) 2 x (0.75 - 1.5)
Solid or stranded		AWG	18 - 14
Stripping length		mm	8
Terminal screw			M3.5
Pozidriv screwdriver		Size	2
Standard screwdriver		mm	0.8 x 5.5 1 x 6
Max. tightening torque		Nm	1.2
Main conducting paths Rated impulse withstand voltage	U _{imp}	V AC	6000
Overvoltage category/pollution degree	Cimp		111/3
Rated insulation voltage	Ui	V AC	690
Rated operational voltage	U _e	V AC	690
Safe isolation to EN 61140	Ue	V AU	
between coil and contacts		V AC	300
between the contacts		V AC	300
Making capacity (cos φ to IEC/EN 60947)		A	120
Breaking capacity			
220 V 230 V		A	96
380 V 400 V		A	96
500 V		A	72
660 V 690 V		A	42
Short-circuit protection maximum fuse			
	gL/gG		20

Type "1", 500 V	gL/gG	А	35
AC			
AC-1			
Rated operational current			
Conventional free air thermal current, 3 pole, 50 - 60 Hz			
Open			
at 40 °C	I _{th} =I _e	A	22
at 50 °C	I _{th} =I _e	А	20
at 55 °C	I _{th} =I _e	А	19
enclosed	I _{th}	А	16
Notes			At maximum permissible ambient air temperature.
Conventional free air thermal current, 1 pole			
Notes			At maximum permissible ambient air temperature.
open	I _{th}	А	50
enclosed	l _{th}	A	40
AC-3			
Rated operational current			
Open, 3-pole: 50 – 60 Hz			
Notes			At maximum permissible ambient air temperature.
220 V 230 V	I _e	A	12
240 V	l _e	A	12
380 V 400 V			
	l _e	A	12
415 V	le	A	10.5
440V	le	A	10.5
500 V	le	А	9
660 V 690 V	Ι _e	А	5.2
Motor rating	Р	kWh	
220 V 230 V	Ρ	kW	3
240V	Р	kW	3
380 V 400 V	Р	kW	5.5
415 V	Р	kW	5.5
440 V	Р	kW	5.5
500 V	Р	kW	5.5
660 V 690 V	Р	kW	4
AC-4			
Rated operational current			
Open, 3-pole: 50 – 60 Hz			
Notes			At maximum permissible ambient air temperature.
220 V 230 V	Ιe	А	6.6
240 V	I _e	А	6.6
380 V 400 V	I _e	А	6.6
415 V	I _e	А	6.6
440 V	l _e	А	6.6
500 V	l _e	A	5
660 V 690 V	l _e	A	3.4
	P		
Motor rating		kWh	16
220 V 230 V	P	kW	1.5
240 V	P	kW	1.5
380 V 400 V	P	kW	3
415 V	P	kW	3
440 V	P	kW	3
500 V	P	kW	3
660 V 690 V	Р	kW	3

Rated operational current open			
DC-1			
12 V	le	A	20
24 V			20
	l _e	A	
60 V	l _e	A	20
110 V	l _e	A	20
220 V	Ι _e	A	20
Current heat losses (3- or 4-pole)			
at I _{th} , 50 °C		W	5.9
at I _e to AC-3/400 V		W	2.1
Magnet systems			
Voltage tolerance			
AC operated	D: 1		
Dual-frequency coil 50/60 Hz	Pick-up	x U _c	0.8 - 1.1
Power consumption			
AC operation			
Dual-frequency coil 50/60 Hz at 50 Hz	Pick-up	VA	30
Dual-frequency coil 50/60 Hz at 50 Hz	Pick-up	W	26
Dual-frequency coil 50/60 Hz at 50 Hz	Sealing	VA	5.4
Dual-frequency coil 50/60 Hz at 50 Hz	Sealing	W	1.8
Dual-frequency coil 50/60 Hz at 60 Hz	Pick-up	VA	29
Dual-frequency coil 50/60 Hz at 60 Hz	Pick-up	W	24
Dual-frequency coil 50/60 Hz at 60 Hz	Sealing	VA	3.9
Dual-frequency coil 50/60 Hz at 60 Hz	Sealing	W DE	1.8
Duty factor Switching times at 100 % U _c		% DF	100
Make contact		ms	
Closing delay Closing delay min.		ms	14
Closing delay max.		ms ms	21
Opening delay		ms	21
Opening delay min.		ms	8
Opening delay max.		ms	18
Closing delay with top mounting auxiliary contact		ms	45
Reversing contactors			
Changeover time at 110 % U _c			
Changeover time min.		ms	16
Changeover time max.		ms	21
Arcing time at 690 V AC		ms	12
Auxiliary contacts			
Positive operating contacts to EN 60947-5-1 appendix L, including auxiliary comodule	intact		Yes
Rated impulse withstand voltage	U _{imp}	V AC	6000
Overvoltage category/pollution degree			111/3
Rated insulation voltage	Ui	V AC	690
Rated operational voltage	U _e	V AC	600
Safe isolation to EN 61140			
between coil and auxiliary contacts		V AC	300
between the auxiliary contacts		V AC	300
Rated operational current			
AC-15			
220 V 240 V	I _e	A	6

380 V 415 V

500 V

DC

А

A

3

1.5

l_e I_e

DC L/R ≦ 15 ms			
Contacts in series:		A	
1	24 V	A	2.5
2	60 V	A	2.5
3	100 V	A	1.5
3	220 V	A	0.5
Conv. thermal current	I _{th}	А	10
Control circuit reliability	Failure rate	λ	<10 ⁻⁸ , < one failure at 100 million operations (at U _e = 24 V DC, U _{min} = 17 V, I _{min} = 5.4 mA)
Component lifespan at U _e = 240 V			
AC-15	Operations	x 10 ⁶	0.2
DC current			
$L/R = 50$ ms: 2 contacts in series at $I_e = 0.5$ A	Operations	1 06	0.15
	Operations	x 10 ⁶	
Notes			Switch-on and switch-off conditions based on DC-13, time constant as specified
Short-circuit rating without welding			
Maximum overcurrent protective device			
Short-circuit protection only			PKZM0-4
Short-circuit protection maximum fuse			
500 V		A gG/gL	6
500 V		A fast	10
Current heat loss at a load of I _{th} per contact		W	1.1
Rating data for approved types			
Switching capacity			
Maximum motor rating			
Three-phase			
200 V 208 V		HP	2
230 V 240 V		HP	3
460 V 480 V		HP	5
575 V 600 V		HP	5
Single-phase			
115 V 120 V		HP	0.5
230 V 240 V		HP	1.5
General use		A	15
Auxiliary contacts			
Pilot Duty			
AC operated			A600
DC operated			P300
General Use			
AC		V	600
AC		А	10
DC		V	250
DC		A	0.5
Short Circuit Current Rating		SCCR	
Basic Rating			
SCCR		kA	5
max. Fuse		A	45

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I _n	А	12
Heat dissipation per pole, current-dependent	P _{vid}	W	0.7

10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction	Equipment heat dissipation, current-dependent	P _{vid}	W	2.1
Operating ambient temperature min. Control Contro Control Contro <t< td=""><td>Static heat dissipation, non-current-dependent</td><td>P_{vs}</td><td>W</td><td>1.8</td></t<>	Static heat dissipation, non-current-dependent	P _{vs}	W	1.8
Operating ambient temperature max. C 50 EC/EN 81439 design verification C 50 10.22 Corrison resistance Meets the product standard's requirements. C 10.2.3.1 Verification of thermal stability of enclosures Meets the product standard's requirements. C 10.2.3.2 Verification of resistance of insulating materials to abnormal heat Meets the product standard's requirements. C 10.2.3.1 Verification of resistance of insulating materials to abnormal heat Meets the product standard's requirements. C 10.2.3.2 Verification of resistance of insulating materials to abnormal heat Meets the product standard's requirements. C 10.2.4 Resistance to ultra-violet (UV) relation Meets the product standard's requirements. C 10.2.4 Resistance to ultra-violet (UV) relation Meets the product standard's requirements. C 10.2.4 Resistance to ultra-violet (UV) relation Meets the product standard's requirements. C 10.2.5 Urting Meets the product standard's requirements. C 10.3.0 Degree of protection ad ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated. C 10.4 Clearances and components Meets the panel builder's responsibility. C	Heat dissipation capacity	P _{diss}	W	0
IDECNN 61/39 design verification IDECNN 61/39 design verification ID2 Strength of materials and parts Meets the product standard's requirements. ID2.21 Verification of thermal stability of enclosures Meets the product standard's requirements. ID2.32 Verification of resistance of insulating materials to normal heat and fire due to interral electric effects Meets the product standard's requirements. ID2.32 Verification of resistance of insulating materials to abnormal heat and fire due to interral electric effects Meets the product standard's requirements. ID2.4 Resistance to ultra-violet (UV) radiation Meets the product standard's requirements. ID2.5 Lifting Does not apply, since the entire switchgear needs to be evaluated. ID2.2 Nacriptions Meets the product standard's requirements. ID3.2 Bogree of protection of ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated. ID4.2 Internal electrical circuits and connections Does not apply, since the entire switchgear needs to be evaluated. ID5.2 Protection against electric shock Does not apply, since the entire switchgear needs to be evaluated. ID4.2 Internal electrical circuits and connections Is the panel builder's responsibility. ID4.8 Connections for external conductors Is the panel builder's responsibility. ID4.8 Connection of svitching devices and components Does not app	Operating ambient temperature min.		°C	-25
102.Strength of materials and parts Meets the product standard's requirements. 102.2.Corrosion resistance Meets the product standard's requirements. 102.3.1 Verification of thermal stability of enclosures Meets the product standard's requirements. 102.3.2 Verification of resistance of insulating materials to normal heat and fire due to internal electric effects Meets the product standard's requirements. 102.3.2 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects Meets the product standard's requirements. 102.4 Resistance to ultra-violet (UV) radiation Does not apply, since the entire switchgear needs to be evaluated. 102.5 Uriting Does not apply, since the entire switchgear needs to be evaluated. 102.2.6 Mechanical impact Does not apply, since the entire switchgear needs to be evaluated. 102.2.7 Inscriptions Meets the product standard's requirements. 103.8 Degree of protection of ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated. 104.Clearances and creepage distances Meets the panel builder's requirements. 105.Protection against electric shock Does not apply, since the entire switchgear needs to be evaluated. 104.7 Internal electrical circuits and connections Is the panel builder's responsibility. 108. Incorporation of switching devices and components Does n	Operating ambient temperature max.		°C	50
10.2.2 Corrosion resistance Meets the product standard's requirements. 10.2.3.1 Verification of nesistance of insulating materials to abnormal heat Meets the product standard's requirements. 10.2.3.2 Verification of resistance of insulating materials to abnormal heat Meets the product standard's requirements. 10.2.3.3 Verification of resistance of insulating materials to abnormal heat Meets the product standard's requirements. 10.2.4 Resistance to ultra-violet (UV) radiation Dees not apply, since the entire switchgear needs to be evaluated. 10.2.5 Lifting Dees not apply, since the entire switchgear needs to be evaluated. 10.3 Degree of protection of ASSEMBLIES Dees not apply, since the entire switchgear needs to be evaluated. 10.4 Clearances and creepage distances Dees not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electric shock Dees not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electric dortics and components Enternal builder's responsibility. 10.8 Incorporation of switching devices and components Enternal builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.1 Temperature rise Is the panel builder's responsibility. 10.9.	IEC/EN 61439 design verification			
10.2.3.1 Verification of thermal stability of enclosures Meets the product standard's requirements. 10.2.3.2 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects Meets the product standard's requirements. 10.2.3.2 Verification of resistance of usulating materials to abnormal heat and fire due to internal electric effects Meets the product standard's requirements. 10.2.4 Resistance to ultra-violet (UV) radiation Does not apply, since the entire switchgear needs to be evaluated. 10.2.5 Lifting Does not apply, since the entire switchgear needs to be evaluated. 10.2.7 Inscriptions Meets the product standard's requirements. 10.3 Degree of protection of ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated. 10.4 Clearances and creepage distances Meets the product standard's requirements. 10.5 Protection against electric shock Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility. 10.8 Connections for external conductors Is the panel builder's responsibility. 10.9.1 Protection against electric strength Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builde	10.2 Strength of materials and parts			
10.2.3.2 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effectsMeets the product standard's requirements.10.2.3 Verification of resistance to ultra-violet (UV) radiationMeets the product standard's requirements.10.2.4 Resistance to ultra-violet (UV) radiationMeets the product standard's requirements.10.2.5 LiftingDoes not apply, since the entire switchgear needs to be evaluated.10.2.7 InscriptionsMeets the product standard's requirements.10.3 Degree of protection of ASSEMBLIESDoes not apply, since the entire switchgear needs to be evaluated.10.4 Clearances and creepage distancesMeets the product standard's requirements.10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electric direcuits and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.9 Insulation propertiesIs the panel builder's responsibility.10.9.1 Power-frequency electric strengthIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must observed.10.13 Mechanical functionThe device meets the requirements, provided the information in the instruction	10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects Meets the product standard's requirements. 10.2.4 Resistance to ultra-violet (UV) radiation Meets the product standard's requirements. 10.2.5 Lifting Does not apply, since the entire switchgear needs to be evaluated. 10.2.7 Inscriptions Meets the product standard's requirements. 10.3 Degree of protection of ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated. 10.4 Clearances and creepage distances Meets the product standard's requirements. 10.5 Protection against electric shock Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility. 10.8 Connections for external conductors Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.1 Temperature rise Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction <td>10.2.3.1 Verification of thermal stability of enclosures</td> <td></td> <td></td> <td>Meets the product standard's requirements.</td>	10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
and fire due to internal electric effectsMeets the product standard's requirements.10.2.4 Resistance to ultra-violet (UV) radiationDoes not apply, since the entire switchgear needs to be evaluated.10.2.5 LiftingDoes not apply, since the entire switchgear needs to be evaluated.10.2.6 Mechanical impactDoes not apply, since the entire switchgear needs to be evaluated.10.2.7 InscriptionsMeets the product standard's requirements.10.3 Degree of protection of ASSEMBLIESDoes not apply, since the entire switchgear needs to be evaluated.10.4 Clearances and creepage distancesMeets the product standard's requirements.10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9.1 PropertiesIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must observed.10.13 Mechanical functionThe device meets the requirements, provide the information in the instruction	10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.5 LiftingDoes not apply, since the entire switchgear needs to be evaluated.10.2.6 Mechanical impactDoes not apply, since the entire switchgear needs to be evaluated.10.2.7 InscriptionsMeets the product standard's requirements.10.3.0 Begree of protection of ASSEMBLIESDoes not apply, since the entire switchgear needs to be evaluated.10.4 Clearances and creepage distancesMeets the product standard's requirements.10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9.9 Insulation propertiesIs the panel builder's responsibility.10.9.1 Power-frequency electric strengthIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.1 The panel builder is responsibility.Is the panel builder's responsibility.10.10 Temperature riseThe panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must observed.10.13 Mechanical functionThe device meets the requirements, provided the information in the instruction				Meets the product standard's requirements.
10.2.6 Mechanical impactDoes not apply, since the entire switchgear needs to be evaluated.10.2.7 InscriptionsDoes not apply, since the entire switchgear needs to be evaluated.10.3 Degree of protection of ASSEMBLIESDoes not apply, since the entire switchgear needs to be evaluated.10.4 Clearances and creepage distancesMeets the product standard's requirements.10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9.1 Insulation propertiesIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Impulse withstand voltageIs the panel builder is responsibility.10.10 Temperature riseIs the panel builder is responsibility.10.11 Short-circuit ratingIs the panel builder is responsibility. The specifications for the switchgear must observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must observed.10.13 Mechanical functionThe device meets the requirements, provided the information in the instruction	10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.7 InscriptionsMeets the product standard's requirements.10.3 Degree of protection of ASSEMBLIESDoes not apply, since the entire switchgear needs to be evaluated.10.4 Clearances and creepage distancesMeets the product standard's requirements.10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9.1 Insulation propertiesIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialIs the panel builder's responsibility.10.10 Temperature riseThe panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must observed.10.13 Mechanical functionIs the panel builder's responsibility. The specifications for the switchgear must observed.	10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.3 Degree of protection of ASSEMBLIESDoes not apply, since the entire switchgear needs to be evaluated.10.4 Clearances and creepage distancesMeets the product standard's requirements.10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9.1 Insulation propertiesIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must observed.10.13 Mechanical functionThe device meets the requirements, provide the information in the instruction	10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distancesMeets the product standard's requirements.10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9.1 Insulation propertiesIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Impulse withstand voltageIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must observed.10.13 Mechanical functionThe device meets the requirements, provided the information in the instruction	10.2.7 Inscriptions			Meets the product standard's requirements.
10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9 Insulation propertiesIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Impulse withstand voltageIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must observed.10.13 Mechanical functionThe device meets the requirements, provided the information in the instruction	10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9 Insulation propertiesIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Impulse withstand voltageIs the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must observed.10.13 Mechanical functionThe device meets the requirements, provided the information in the instruction	10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.7 Internal electrical circuits and connections Is the panel builder's responsibility. 10.8 Connections for external conductors Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.13 Mechanical function The device meets the requirements, provide the information in the instruction	10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.8 Connections for external conductors Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise The panel builder is responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.9 Insulation properties Image: Control of the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder is responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Impulse withstand voltageIs the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialIs the panel builder's responsibility.10.10 Temperature riseThe panel builder is responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must observed.10.13 Mechanical functionThe device meets the requirements, provided the information in the instruction	10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder is responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.9 Insulation properties			
10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder is responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.10 Temperature rise The panel builder is responsible for the temperature rise calculation. Eaton with provide heat dissipation data for the devices. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
	10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
leanet (IL) is observed.	10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Power contactor, AC swit	ching (EC000066)		
Electric engineering, automation, process control engineering / Low-volta	ge switch technology /	Contactor	(LV) / Power contactor, AC switching (ecl@ss10.0.1-27-37-10-03 [AAB718015])
Rated control supply voltage Us at AC 50HZ		V	230 - 230
Rated control supply voltage Us at AC 60HZ		V	230 - 230
Rated control supply voltage Us at DC		V	0 - 0
Voltage type for actuating			AC
Rated operation current le at AC-1, 400 V		А	22
Rated operation current le at AC-3, 400 V		А	9
Rated operation power at AC-3, 400 V		kW	4
Rated operation current le at AC-4, 400 V		А	6.6
Rated operation power at AC-4, 400 V		kW	3
Rated operation power NEMA		kW	3.7
Modular version			No
Number of auxiliary contacts as normally open contact			1
Number of auxiliary contacts as normally closed contact			0
Type of electrical connection of main circuit			Screw connection
Number of normally closed contacts as main contact			0
Number of main contacts as normally open contact			3


Approvals


Product Standards


IEC/EN 60947-4-1; UL 508; CSA-C22.2 No. 14-05; CE marking


UL File No.	E29096
UL Category Control No.	NLDX
CSA File No.	012528
CSA Class No.	3211-04
North America Certification	UL listed, CSA certified
Specially designed for North America	No


Characteristics

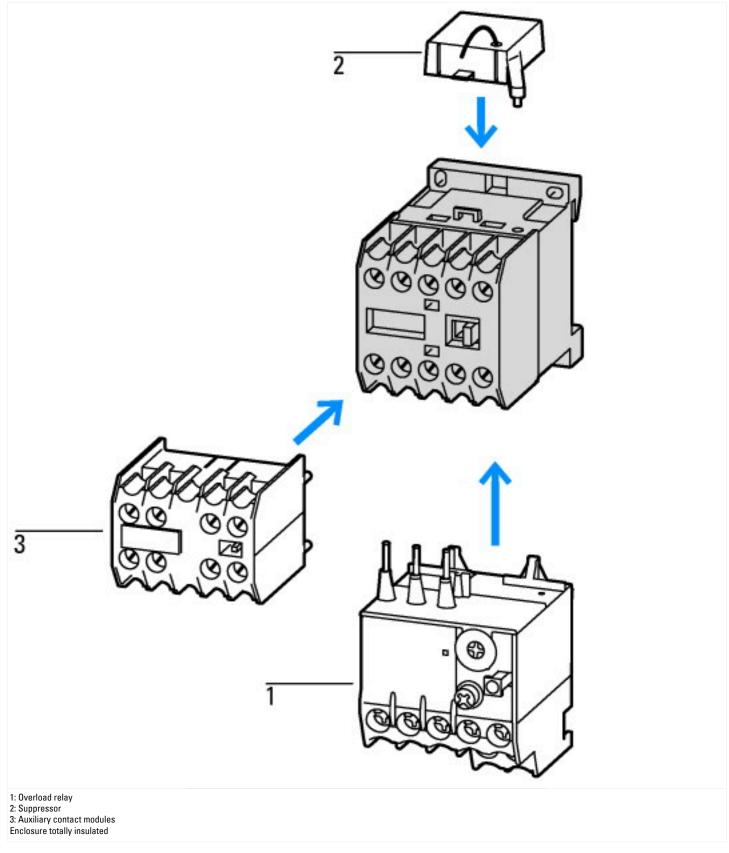

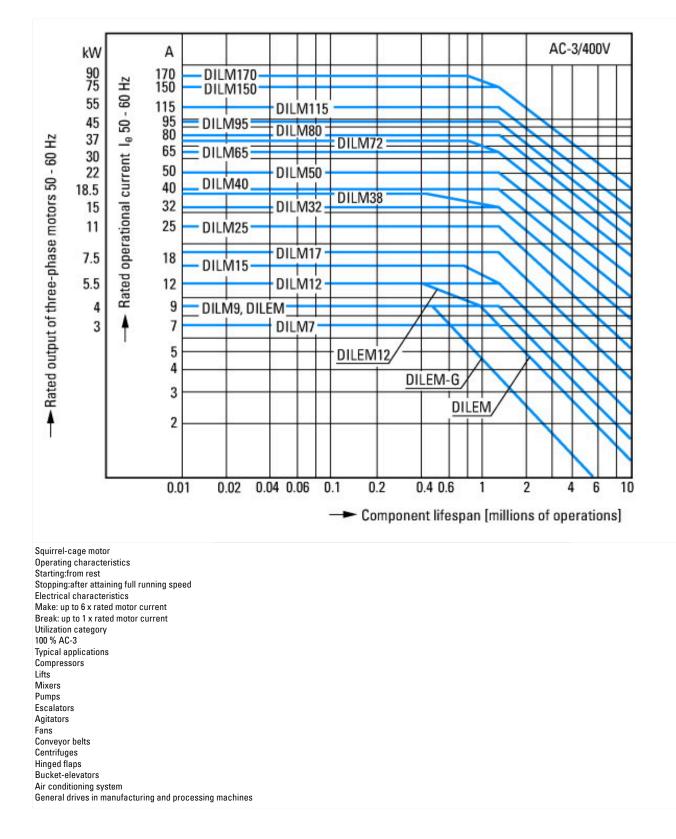

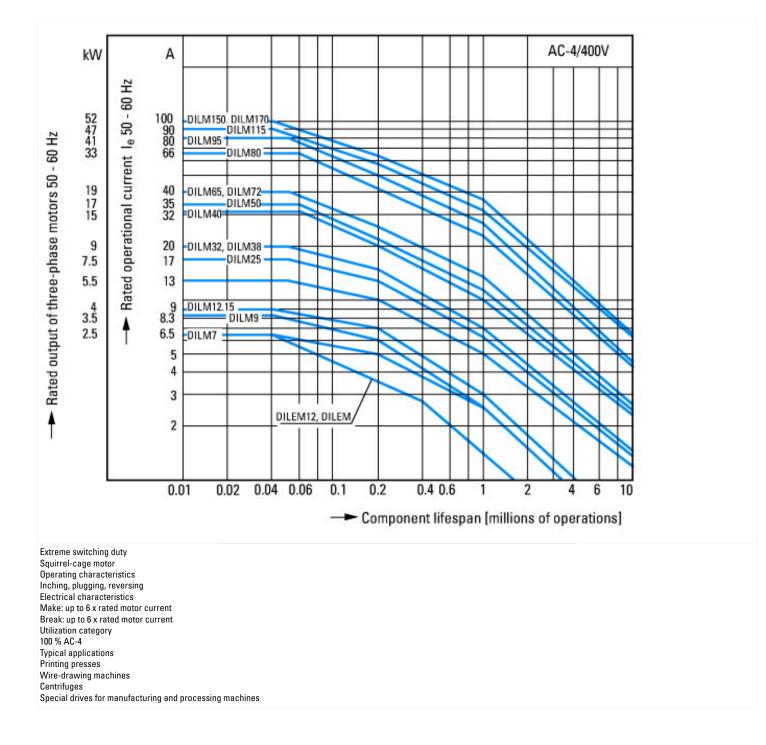


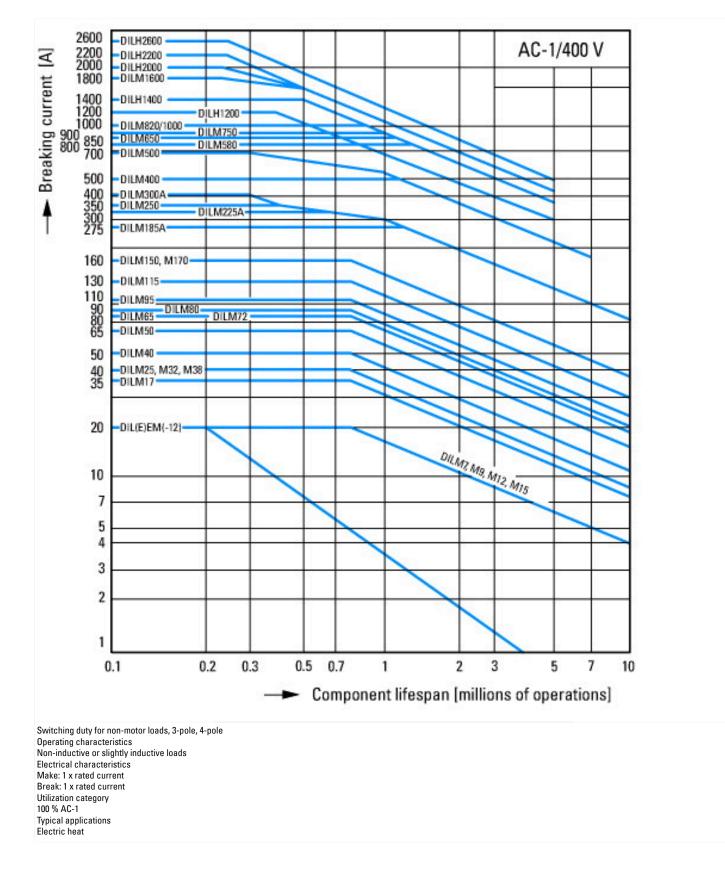


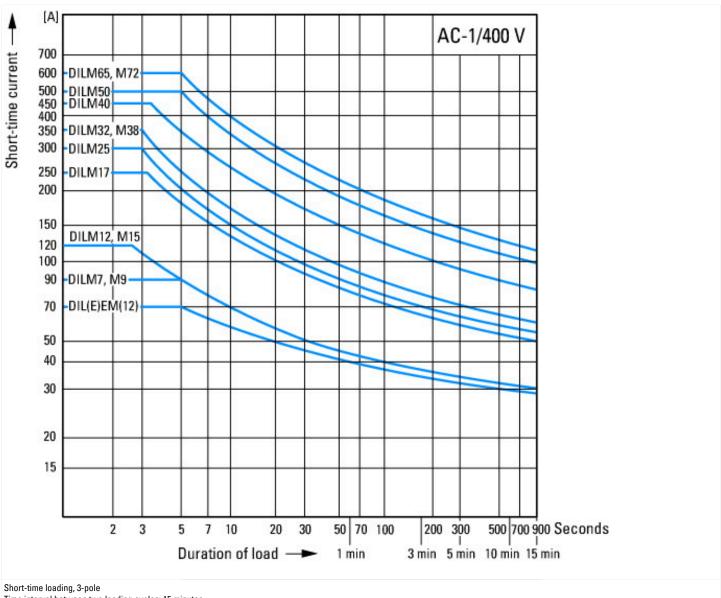

Time interval between two loading cycles: 15 minutes

Dimensions

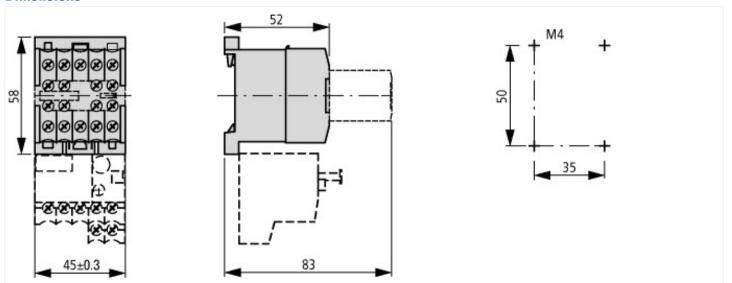

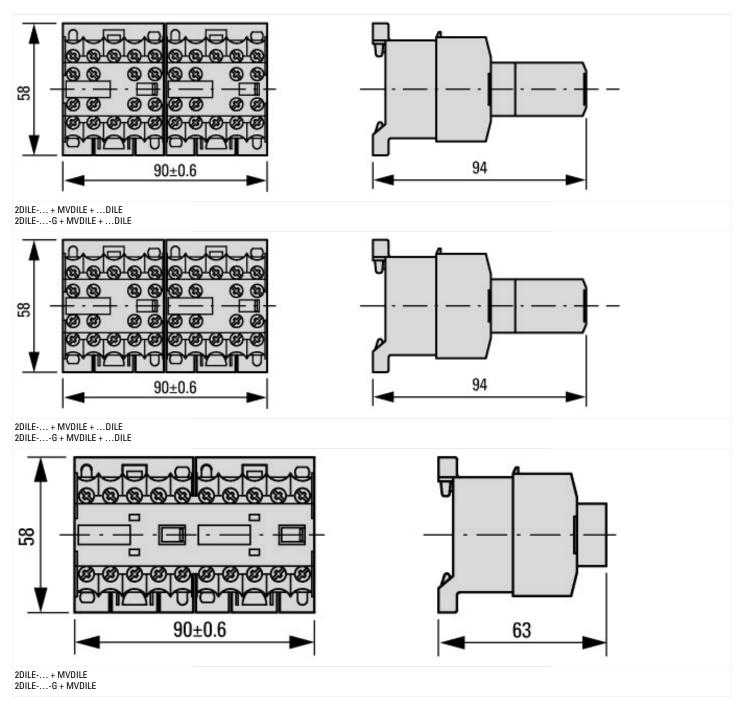

Additional product information (links)

IL03407009Z (AWA2100-0882) Mini contactor relay

IL03407009Z (AWA2100-0882) Mini contactor ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407009Z2018_04.pdf relay