


OSCONIQ® C2424 4 PowerStars CRI90

ILH-OC04-xx90-SC221-WIR200.

At the heart of each PowerStar are 4 OSCONIQ® C2424 LEDs from OSRAM Opto Semiconductors. OSCONIQ® C2424 LEDs can be driven up to 1500mA while OSRAM's latest power chip technology remains efficient even at the highest drive currents. OSCONIQ® C2424 LEDs are OSRAM's second chip scale package with a small footprint (2424) and Light Emitting Surface of 2121. A low thermal resistance of 3.5K/W ensures cool running and a highly efficient product. PowerStars are compact, powerful LED light sources built on aluminium substrates for optimal thermal management. Available with 200mm wires as standard.

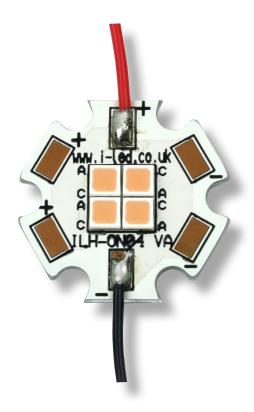

CONTENTS

Applications	page 2	Lens and Reflector Options	<u>page 6</u>
Technical Features	page 2	Heatsink Options	page 7
Product Options	page 3	Power Supply Options	<u>page 8</u>
Min and Max Value Table	page 3	Thermal Interface Material Options	<u>page 8</u>
Technical Drawings	page 5	Important Information and Precautions	page 9
LED Radiation Diagram	page 6_	Safety Information	page 10







APPLICATIONS INCLUDE

- » General lighting
- » Decorative lighting
- » Task lighting
- » Spot lighting
- » Museum lighting

- » Downlighters
- » Retail lighting
- » Entertainment lighting
- » Street lighting
- » High Bay lighting

TECHNICAL FEATURES

LED/s	PowerStars contain 4 OSCONIQ® C2424 LEDs
Lifetime	Up to 100,000 Hour lifetime to 70% of original brightness
Mounting	Mounting holes using M3 screws allows easy installation
Dimensions (L x W x H)	20 x 20 x 2.2 mm
Wiring	Available with 200mm connecting wires
Lenses and Reflectors	Suitable options on <u>page 6</u> or visit <u>our website</u> for a full range.
Heatsinks	Required over 350mA. Suitable options on <u>page 7</u> or visit <u>our website</u> for a full range
Power Supply	4 - 60W Dimming and non dimming. Suitable options on <u>page 8</u> or visit <u>our website</u> for a full range.
Chain	Yes. PowerStars can be linked together to produce longer chains.
Current Range	100 to 1500mA
Thermal Resistance	3.5K/W





PRODUCT OPTIONS

ILS Part Number	Colour	Colour Temp* (Degrees Kelvin)	Typical Wattage at 700mA	Forward Voltage at 700mA§	Flux † at 700mA	Radiance Angle	Relevant OSRAM LED Data
ILH-OC04-HW90-SC221-WIR200.	Hot White	2700K	7.84W	10.8-12.8V	800 lm	120° (±60 °)	GW PLLRA1.CM
ILH-OC04-WM90-SC221-WIR200.	Warm White	3000K	7.84W	10.8-12.8V	840 lm	120° (±60 °)	GW PLLRA 1.CM
ILH-OC04-NW90-SC221-WIR200	Neutral White	4000K	7.84W	10.8-12.8V	920 lm	120° (±60 °)	GW PLLRA 1.CM
ILH-OC04-WH90-SC221-WIR200.	White	5000K	7.84W	10.8-12.8V	960 lm	120° (±60 °)	GW PLLRA 1.CM
ILH-OC04-ST90-SC221-WIR200.	Street White	5700K	7.84W	10.8-12.8V	960 lm	120° (±60 °)	GW PLLRA 1.CM
ILH-OC04-UL90-SC221-WIR200.	Ultra White	6500K	7.84W	10.8-12.8V	960 lm	120° (±60 °)	GW PLLRA1.CM

^{*}Due to the special conditions of the manufacturing processes of LEDs, the typical data of technical parameters can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.

MINIMUM AND MAXIMUM RATINGS

ILS Part Number	Operating Temperature at Tc-Point [° C]*	Storage Temperature [° C]*	Forward Current per chip [mA]*	Reverse Voltage [Vdc]*
ILH-OC04-HW90-SC221-WIR200.	-40 °C to 125 °C	-40 °C to 125 °C	100-1500mA	not designed for reverse voltage
ILH-OC04-WM90-SC221-WIR200.	-40 °C to 125 °C	-40 °C to 125 °C	100-1500mA	not designed for reverse voltage
ILH-OC04-NW90-SC221-WIR200	-40 °C to 125 °C	-40 °C to 125 °C	100-1500mA	not designed for reverse voltage
ILH-OC04-WH90-SC221-WIR200.	-40 °C to 125 °C	-40 °C to 125 °C	100-1500mA	not designed for reverse voltage
ILH-OC04-ST90-SC221-WIR200.	-40 °C to 125 °C	-40 °C to 125 °C	100-1500mA	not designed for reverse voltage
ILH-OC04-UL90-SC221-WIR200.	-40 °C to 125 °C	-40 °C to 125 °C	100-1500mA	not designed for reverse voltage

^{*} Exceeding maximum ratings for operating and storage temperature will reduce expected life time or destroy the LED module.

Exceeding maximum ratings for operating voltage will cause hazardous overload and will likely destroy the LED module.

The temperature of the LED module must be measured at the Tc-Point according to EN60598-1 in a thermally constant status with a temperature sensor or a temperature sensitive label.







[§] Tolerance +/- 10%

[†] Measured at 700mA at 85°c

ACCESSORIES

Lenses and Reflectors



LEDiL precision-engineered Lenses and Reflectors allow for rapid deployment of all types of light fixtures, including street lights, wall-wash, high-bay, sconces, emergency beacons, parking garage/low-bay, MR and AR downlights, and dock lights. Precision-engineered for maximum efficiency and durability, LEDiL Lenses and Reflectors are released alongside the latest product releases from our LED suppliers. Suitable options on page 6 or visit our website for a full range.

Heatsinks



ILS has a series of Aluminium Alloy Heatsinks to be used with our standard range of PowerStars and PowerClusters. These Heatsinks are supplied with fixing screws for the light engine and for fixing to a base plate. They also come with Thermal Interface Material (TIM) attached to the top surface. Suitable options on page 7 or visit our website for a full range.

Power Supplies

ILS has a comprehensive range of standard Power
Supplies. The table below shows the total number
of ILS products each Power Supply can drive. Additional
Power Supplies are being introduced so please call us or
check our website for the latest offering. Suitable options
on page 8



Thermal Interface Material (TIM)

ILS have produced a range of High-performance, cost effective Thermal Interface Materials to match perfectly their standard products. Our product fills the air pockets between the two surfaces, forming a continuous layer to conduct heat away from the LED to the Heatsink. ILS offer our TIM in three options – double sided adhesive, single sided adhesive and non adhesive. Suitable options on page 8 or visit our website for a full range.







TECHNICAL DRAWINGS (MM)

Coming Soon


3D drawing files are available on request from ILS. Please call or email







RADIATION OF SINGLE LED

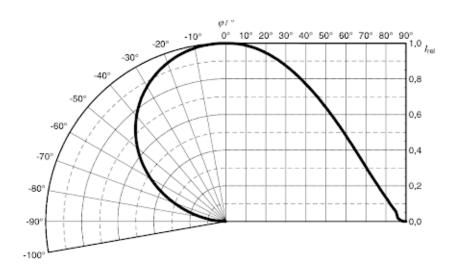

OSCONIQ® C2424 4 POWERSTAR LENS AND REFLECTOR OPTIONS

LEDiL precision-engineered Lenses and Reflectors allow for rapid deployment of all types of light fixtures, including street lights, wall-wash, high-bay, sconces, emergency beacons, parking garage/low-bay, MR and AR downlights, and dock lights. Precision-engineered for maximum efficiency and durability, LEDiL Lenses and Reflectors are released alongside the latest product releases from our LED suppliers. You select the best LED for the application; choose LEDiL and you're selecting the best optical solution as well.

Currently there are not any lens or reflector options for the OSCONIQ $^{\circ}$ C2424 4 PowerStars.







OSCONIQ® C2424 4 POWERSTAR HEATSINK OPTIONS

ILS Product	OSCONIQ® C2424 4 PowerStar			
ILS Product	350mA	700mA	1000mA	
No Heatsink, in free air				
ILA-HSINK-STAR-50X20MM				
ILA-HSINK-STAR-50X40MM				
ILA-HSINK-STAR-50X60MM				
ILA-HSINK-STAR-50X80MM				
ILA-HSINK-70X70X55MM				
ILA-HSINK-78X46X25MM				

KEY

Operates under the recommended ILS junction temperature

Operates under the recommended LED maximum junction temperature

Not suitable for use

Heatsink not designed for use with this product

Click here to visit our website for our latest range





OSCONIQ® C2424 4 POWERSTAR POWER SUPPLY OPTIONS

ILS has a comprehensive range of standard Power Supplies. The table below shows the total number of ILS products each Power Supply can drive.

Additional Power Supplies are being introduced so please call us or check our website for the latest offering.

	ILS Driver Part Number	Rating	Current	ILS Driver Output Voltage	Dimming
Constitution of the consti	IZC035-008F-5065C-SA	8W	350mA	3-36V	None
Control of the state of the sta	OTe 10/220240/700 PC	10W	700mA	7-14V	Phase Cut Dim- ming
	OTI-DALI-10/220-240/700-NFC	10W	150-700mA	2.5-45V	DALI
ELECTRICAL DE LA CONTROL DE LA	OTi DALI 15/220240/1A0 NFC	15W	150-1050mA	7.5-54V	DALI
OSAN	OTi DALI 15/220240/1A0 LT2	15W	150-1050mA	7.5-54V	DALI
So, makes the set of any street or \$\frac{1}{2}\boxes \boxes \frac{1}{2} \boxes \boxes	IZC035-017F-0067A-SA	17W	350mA	6-48V	None
	OT20/170-240/1A0-1DIMLT2- G1-CE	20W	200-1050mA	10-38V	ADIM
	OT20/170-240/1A0-4DIMLT2- G2-CE	20W	200-1050A	10-38V	4DIM / AstroDIM / DALI / Mains- DIM / StepDIM
The second secon	IZC050-018T-9500A-SX	18W	500mA	9-36V	Mains Dimming
P 200 contract mass of the con	IZC070-018T-9500A-SX	18W	700mA	6-26V	Mains Dimming
The same of the sa	IZCVAR-040M-9020C-SAL	40W	350-1050mA	350mA 2-100V, 500mA 2-80V, 600mA 2-67V, 700mA 2-57V,900mA 2-45V, 1050mA 2-40V	0-10V, PWM and Resistance

Click here to visit our website for our latest range

THERMAL INTERFACE MATERIAL OPTIONS

Product	Non Adhesive	Single Sided Adhesive	Double Sided Adhesive		
OSCONIQ® C2424 4 PowerStar	ILA-TIM-STAR-OA	ILA-TIM-STAR-1A	ILA-TIM-STAR-2A.		
Other sizes are available, including customised parts					

Click here to visit our website for our latest range







- The mounting of the PowerStar has to be on a metal Heatsink.
- » In order to optimise the thermal management, the metal surface needs to be clean (dirt and oil free) and planar for the best contact with the LED module. A thermal grease or heat transfer material is highly recommended.

IMPORTANT INFORMATION AND PRECAUTIONS



The PowerStar's LED, when powered up, is very bright. Thus it is advised that you do not look directly at it. Turn the PowerStar away from you and do not shine into the eyes of others.



PowerStars will overheat in operation if not attached to a suitable Heatsink. Over heating can cause failure or irreparable damage.



Do not operate PowerStars with a Power Supply with unlimited current. Connection to constant voltage Power Supplies that are not current limited may cause the PowerStar to consume current above the specified maximum and cause failure or irreparable damage.



PowerStars, when operated, can reach high temperatures thus there is risk of injury if they are touched.



DO NOT HOT PLUG ON LED SIDE OF POWER SUPPLY.



DO NOT TOUCH or PUSH on the LED as this can cause irreparable damage.





SAFETY INFORMATION



The LED module itself and all its components must not be mechanically stressed.



Assembly must not damage or destroy conducting paths on the circuit board.



The mounting of the module is carried out by attaching it at the mounting holes. Metal mounting screws must be insulated with synthetic washers to prevent circuit board damage and possible short circuiting.



To avoid mechanical damage to the connecting cables, the boards should be attached securely to the intended substrate. Heavy vibration should be avoided.



Observe correct polarity! Depending on the product, incorrect polarity will lead to emission of red or no light. The module can be destroyed!



Pay attention to standard ESD precautions when installing the OSCONIQ® C2424 4 PowerStar.



The OSCONIQ® C2424 4 PowerStar, as manufactured, have no conformal coating and therefore offer no inherent protection against corrosion. Damage by corrosion will not be accepted as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.



For outdoor usage, a housing is definitely required to protect the board against environmental influences. The design of the housing must correspond to the IP standards in the application. It is also the responsibility of the user to ensure any housings or modifications keep the Tc junction temperature to within stated ranges.



To also ease the luminaire/installation approval, electronic control gear for LED or LED modules should carry the CE mark and be ENEC certified. In Europe the declarations of conformity must include the following standards: CE: EC 61374-2-13, EN 55015, IEC 61547 and IEC 61000-3-2 - ENEC: 61374-2-13 and IEC/EN 62384.



The evaluation of eye safety occurs according to the standard IEC 62471:2006 ("photobiological safety of lamps and lamp systems"). Within the risk grouping system of this CIE standard, the LED specified in this data sheet falls into the class "moderate risk" (exposure time 0.25s). Under real circumstances (for exposure time, eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. As is also true when viewing other bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment and even accidents, depending on the situation.





FURTHER INFORMATION

The values contained in this datasheet can change due to technical innovation. Any such changes will be made without separate notification

If you require further assistance or have an specific or custom enquiries, please contact the ILS team via email or phone. Alternatively please visit our website for more product info and to see our full ranges.



Unit 2, Berkshire Business Centre,
Berkshire Drive, Thatcham,
Berkshire, RG 19 4EW
+44 (0)1635 294606
info@i-led.co.uk
www.i-led.co.uk

ABOUT ILS

ILS offers a high level of technical skill, professionalism and commercial understanding to companies requiring market leading optoelectronics solutions. Offering conceptual advice, electronics design and manufacturing capability, we use high quality production resources both in house and in Asia, providing project support from prototyping to mass production. We also understand the need to provide cost effective solutions and we do so using high quality components to ensure that the end product's reliability and quality is uncompromised. Apart from LEDs in the visible spectrum, we have a wide range of Infrared, UV LEDs, UV tubes, and Lasers.

ILS is a division of Intelligent Group Solutions Ltd (IGS) a well-established respected industry leading Optoelectronics solutions provider. Much of IGS' business comes from providing semi-custom or custom products both in component and sub-assembly form. This comes from providing design support and prototyping within the European market place. With the capability to deliver production displays to wherever in the world that the customer's manufacturing or assembly is being undertaken.

INTELLIGENT GROUP SOLUTIONS DIVISIONS















