

IPSU SERIES

INDUSTRIAL PRESSURE TRANSDUCER - CERAMIC



UK
CA CE

The IPSU series is suitable for use in a wide range of industrial applications. The probe uses a piezo-resistive ceramic sensor, giving excellent media compatibility within a stainless steel housing.

The electronics incorporate a microprocessor based amplifier, requiring no adjusting and giving stable electronics, especially for industrial applications.

Each device is temperature compensated, calibrated and supplied with a traceable serial number and calibration data.*

*Calibration data is supplied as a sticker affixed to the product packaging - do not discard.

Features

- Piezo-resistive thick film ceramic sensor
- Stainless steel body
- Accuracy $<\pm 0.25\%$ FS BFSL
- Various outputs including mV, Volts and mA.
- Pressure ranges from vacuum to +5800psi (Custom ranges available on request)
- 1/4" NPT Pressure port connection

SPECIFICATIONS

Performance

Accuracy (Non-linearity & Hysteresis)	$<\pm 0.25\%$ / FS (BFSL)	
Setting Errors (Offsets)	2-wire	Zero & Full Scale, $<\pm 0.5\%$ / FS
	3-wire	Zero & Full Scale, $<\pm 0.5\%$ / FS
	4-wire	Zero & Full Scale, $<\pm 0.5\%$ / FS @10Volts

Material

Housing	303 Stainless Steel
"O" Ring Seals	Viton
Diaphragm	Ceramic Al ₂ O ₃ 96%
Media Wetted Parts	Housing & connection, 'O' ring seal, diaphragm
Weight	Approx 3.5oz (100g)
Installation Position	Any
Operation Life	$> 100 \times 10^6$ cycles
Insulation Resistance	$> 50\text{MOhms}$ at 50Vdc

Electrical Protection

Supply Reverse Polarity	No damage / no function
Electromagnetic Compatibility	UKCA, CE EMC directive · BS EN 61326-1:2013

Environmental Conditions

Shock	100g / 11s
Vibration	10g RMS (20 - 2000Hz)
Media Temperature	-40°C to +135°C
Ambient Temperature	-20°C to +80°C
Storage Temperature	-40°C to +125°C
Humidity	5% to 95% RH non-condensing

Temperature & Thermal Effects

Compensated Temperature Range	+20°C to +80°C
Thermal Zero Shift (TZS)	<±0.04% /FS/°C
Thermal Span Shift	<-0.015% /°C

PRESSURE RANGES

Pressure Ranges & Passive mV/V Outputs

Nominal Pressure, Gauge	bar	1	6	10	40	100	400
Compound Range	bar			-1 to +9			
Permissible Overpressure	bar	2	10	15	100	150	500
Burst Pressure	bar	3	12	20	120	200	650

Nominal Pressure, Gauge	psi	15	30	75	100	150	300	750	1500
Compound Range	psi					-14.5 to +150	-14.5 to +350		
Permissible Overpressure	psi	30	60	150	225	225	500	1500	2000
Burst Pressure	psi	45	75	180	300	300	700	1800	3000

Output Signal & Supply Voltage

Wire System	Output	Supply Voltage	Connection Pin Nos		
2-wire	4 - 20mA	9 – 32Vdc	+ve Supply Pin 1	-ve Supply Pin 2	Ground Earth Pin
3-wire	0 - 5Vdc	9 – 32Vdc	+ve Supply Pin 1	-ve Supply Pin 2	
			+ve Output Pin 3	Ground Earth Pin	
4-wire (amplified)	10mV/V (ratiometric)	3 – 12Vdc	+ve Supply Pin 1	-ve Supply Pin 2	
			+ve Output Pin 3	-ve Output Earth Pin	


Part Number	Range	Output
IPSU-GP015-5	0-15 psi G	4-20mA
IPSU-GP015-6	0-15 psi G	0-5V
IPSU-GP030-5	0-30 psi G	4-20mA
IPSU-GP030-6	0-30 psi G	0-5V
IPSU-C0446-5	-14.5 to +150 psi G	4 - 20mA
IPSU-C0446-6	-14.5 to +150 psi G	0-5V
IPSU-GP075-6	0-75 psi G	0-5V
IPSU-GP100-3	0-100 psi G	0-100mV
IPSU-GP100-5	0-100 psi G	4-20mA
IPSU-GP100-6	0-100 psi G	0-5V
IPSU-C0447-5	-14.5 to +350 psi G	4-20mA
IPSU-C0447-6	-14.5 to +350 psi G	0-5V
IPSU-GP150-3	0-150 psi G	0-100mV
IPSU-GP150-5	0-150 psi G	4-20mA
IPSU-GP150-6	0-150 psi G	0-5V
IPSU-GP300-3	0-300 psi G	0-100mV
IPSU-GP300-5	0-300 psi G	4-20mA
IPSU-GP300-6	0-300 psi G	0-5V
IPSU-GP750-6	0-750 psi G	0-5V
IPSU-GP1K5-3	0-1500 psi G	0-100mV
IPSU-GP1K5-5	0-1500 psi G	4-20mA
IPSU-GP1K5-6	0-1500 psi G	0-5V

Part Number	Range	Output
IPSU-G1000-3	0-1bar G (0-14.5psi)	0-100mV
IPSU-G1000-5	0-1bar G (0-14.5psi)	4-20mA
IPSU-G6000-5	0-6bar G (0-87psi)	4-20mA
IPSU-GM1P9-6	-1 to +9 Bar G	0-5V
IPSU-G1002-5	0-10bar G (0-145psi)	4-20mA
IPSU-G2502-5	0-25bar G (0-363psi)	4-20mA
IPSU-G1003-5	0-100bar G (0-1405psi)	4-20mA
IPSU-G4003-5	0-400bar G (0-5802psi)	4-20mA

(Custom ranges and outputs available on request)



DIMENSIONS

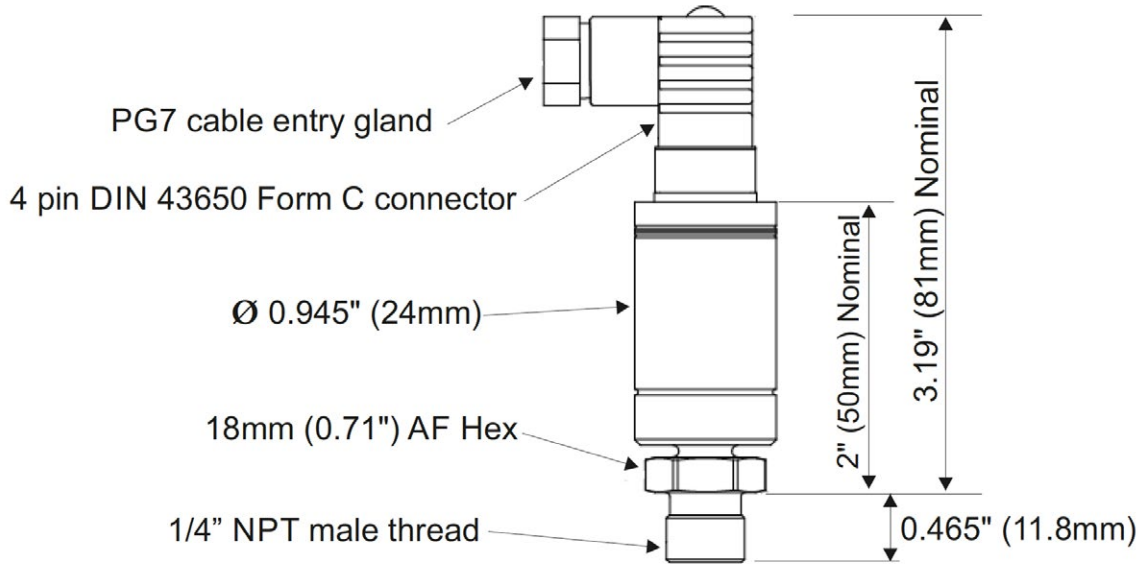

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

+44 (0)1202 897969
support@sensata.com
Sensata | Cynergy3
7 Cobham Road,
Ferndown Industrial Estate,
Wimborne, Dorset,
BH21 7PE, United Kingdom