#### **DATASHEET - LS-S02-120AFT-ZBZ/X**



Position switch, 2 N/C, basic, spring force

Part no. LS-S02-120AFT-ZBZ/X

Catalog No. 106778

Eaton Catalog No. LS-S02-120AFT-ZBZ/X

**EL-Nummer** 4356173

(Norway)



**Delivery program** 

belivery program			
Basic function			Position switches Safety position switches
Part group reference			LSZBZ/X
Product range			Basic units with spring-powered interlock (closed-circuit principle)
Degree of Protection			IP65
Features			Basic device, expandable
Ambient temperature		°C	-25 - +40
Description			With interlock monitoring with auxiliary release mechanism Monitoring of door position: continuous
Approval			ET 18060 Sicherheit geprüft tested safety
Contacts			
N/C = Normally closed			2 NC →
Notes			= safety function, by positive opening to IEC/EN 60947-5-1
Contact sequence			$ \begin{array}{cccccccccccccccccccccccccccccccccccc$
Rated control voltage for magnetic drive	$U_s$	V	120 V 50/60 Hz
Housing			Insulated material
Connection type			Screw terminal
N 4 0 2 1 4 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			

Notes Switch must never be used as a mechanical stop!

The operating head can be rotated manually in 90° steps without tools to suit the specified level of actuation.

With the actuator inserted, the N/O contact is open and the N/C contact is closed.

For degree of protection IP65, use V-M20 (206910) cable glands with connecting thread of max. 9 mm length.

In the event of power failure (e.g., during commissioning), the device can be released with a screwdriver. The auxiliary release mechanism must be sealed! 

In the event of power failure (e.g., during commissioning), the device can be released with a screwdriver. The auxiliary release mechanism must be sealed!

#### **Technical data**

#### General

delleral		
Standards		IEC/EN 60947
Climatic proofing		Damp heat, constant, to IEC 60068-2-78; damp heat, cyclical, to IEC 60068-2-30
Ambient temperature	°C	-25 - +40
Mounting position		As required
Degree of Protection		IP65
Terminal capacities	$mm^2$	
Solid	$mm^2$	1 x (0.75 - 2.5) 2 x (0.75 - 1.5)
Flexible with ferrule	mm <sup>2</sup>	1 x (0.5 - 1.5)

			2 x (0.5 - 1.5)
Townian Larrow			
Terminal screw			PH1
Tightening torque for terminal screw		Nm	0.9
Contacts/switching capacity Rated impulse withstand voltage	II.	V AC	4000
	U <sub>imp</sub>		
Rated insulation voltage	Ui	V	400
Overvoltage category/pollution degree			III/3
Rated operational current	l <sub>e</sub>	Α	
AC-15			
24 V	l <sub>e</sub>	Α	6
220 V 230 V 240 V	l <sub>e</sub>	Α	6
380 V 400 V 415 V	I <sub>e</sub>	Α	4
DC-13			
24 V	l <sub>e</sub>	Α	3
110 V	I <sub>e</sub>	Α	0.8
220 V	I <sub>e</sub>	Α	0.3
Supply frequency		Hz	max. 400
Short-circuit rating to IEC/EN 60947-5-1			
max. fuse		A gG/gL	6
Repetition accuracy		mm	0.02
Rated conditional short-circuit current		kA	1
Mechanical variables			
Lifespan, mechanical	Operations	x 10 <sup>6</sup>	1
Mechanical shock resistance (half-sinusoidal shock, 20 ms)			
Standard-action contact		g	10
Operating frequency	Operations/h		≦ 800
Actuation			
Mechanical			
Actuating force at beginning/end of stroke		N	25/15 (plug-in/pull-out)
Mechanical holding force acc. to GS-ET-19 (04/2004)			
XG, XW, XNG		N	1700
XWA, XFG, XF		N	1600
XNW		N	1200
Electromechanical			
For magnet			
Power consumption			
at 120 V AC		VA	8
at 230 V AC		VA	11
at 24 V DC		W	8
Pick-up and drop-out values		x U <sub>s</sub>	0.85 - 1.1

# Design verification as per IEC/EN 61439

Magnet duty factor

Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	6
Heat dissipation per pole, current-dependent	P <sub>vid</sub>	W	0.13
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	0
Static heat dissipation, non-current-dependent	$P_{vs}$	W	0
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	40
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.

% ED

10.2.3.2 Verification of resistance of insulating materials to normal heat	Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects	Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation	Meets the product standard's requirements.
10.2.5 Lifting	Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions	Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

#### **Technical data ETIM 7.0**


Technical data ETTIVI 7.0			
Sensors (EG000026) / End switch (EC000030)			
Electric engineering, automation, process control engineering / Binary sensor (ecl@ss10.0.1-27-27-06-01 [AGZ382015])	technology, safety-re	elated s	ensor technology / Position switch / Position switch (Type 1)
Width sensor	ı	mm	60
Diameter sensor		mm	0
Height of sensor		mm	173
Length of sensor		mm	39
Rated operation current le at AC-15, 24 V	,	Α	6
Rated operation current le at AC-15, 125 V	,	Α	6
Rated operation current le at AC-15, 230 V	,	Α	6
Rated operation current le at DC-13, 24 V		Α	3
Rated operation current le at DC-13, 125 V	,	Α	0.8
Rated operation current le at DC-13, 230 V	,	Α	0.3
Switching function			Slow-action switch
Switching function latching			No
Output electronic			No
Forced opening			Yes
Number of safety auxiliary contacts			2
Number of contacts as normally closed contact			2
Number of contacts as normally open contact			0
Number of contacts as change-over contact			0
Type of interface			None
Type of interface for safety communication			None
Construction type housing			Cuboid
Material housing			Plastic
Coating housing			Other
Type of control element			Other
Alignment of the control element			Other
Type of electric connection			Other
With status indication			No
Suitable for safety functions			Yes

Explosion safety category for gas		None
Explosion safety category for dust		None
Ambient temperature during operating	°C	25 - 70
Degree of protection (IP)		IP65
Degree of protection (NEMA)		13

## Approvals

Product Standards	IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14; CE marking
UL File No.	E29184
UL Category Control No.	NKCR
CSA File No.	12528
CSA Class No.	3211-03
North America Certification	UL listed, CSA certified
Degree of Protection	IEC: IP65, UL/CSA Type 3R, 4X (indoor use only), 12, 13

### **Dimensions**

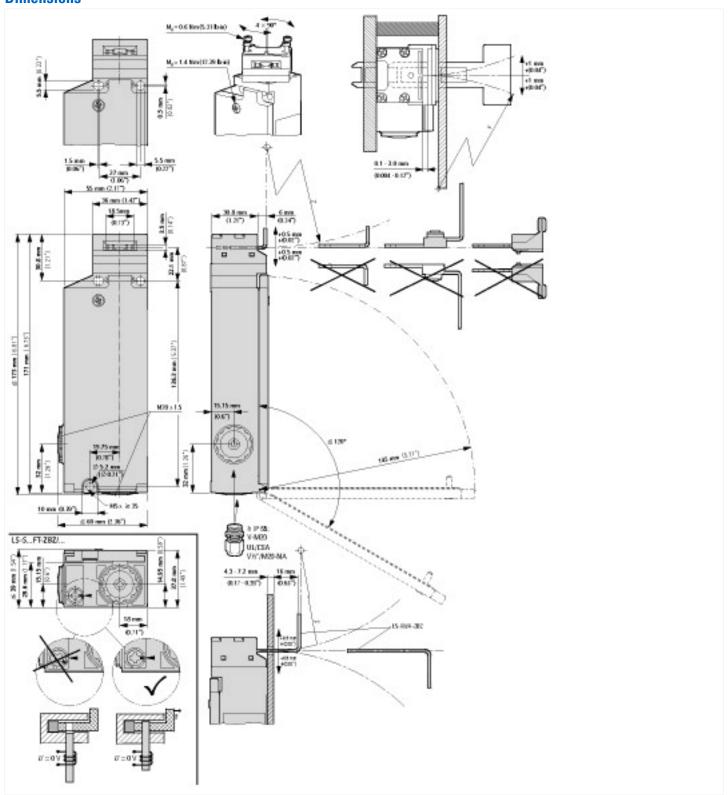

#### **Additional product information (links)**

IL05208005Z (AWA1310-2354) Safety position switch

IL05208005Z (AWA1310-2354) Safety position switch

ftp://ftp.moeller.net/DOCUMENTATION/AWA\_INSTRUCTIONS/IL05208005Z2018\_11.pdf