Features

LED Driver

- Low profile case (13mm height max.)
- 12V and 24V constant voltage outputs
- Terminal block input/output with cable clamps
- Fully protected (OLP, SCP, OCP, OTP)
- Low standby power, ErP conform
- Low cost

Description

These low profile constant voltage LED drivers have been designed for cost-sensitive applications. The SELV outputs are suitable for both independently supplied or built-in power-supply LED luminaires. Their low profile design allows them to be invisibly built into furniture, discreetly mounted under shelves or integrated in space-restricted applications such as coving lighting, strip lighting or troffer lighting systems. The power supplies are short circuit and overload protected and come with a full 3-year warranty.

Selection Guid	le					
Part Number	Input Voltage Range [VAC]	Input Current [mA]	Output Voltage [VDC]	Output Current Range [mA]	Efficiency typ. [%]	Output Power max. [W]
RACV20-12-LP	198-264	210	12	0-1670	82	20W
RACV20-24-LP	198-264	210	24	0-830	84	20W

All LED Drivers may not be used without a load. They must be switched on the primary side only.

Noncompliance may damage the LED or reduce its lifetime.

RECOM AC/DC Converter

RACV20-LP

20 Watt Constant Voltage Single Output

















IEC/EN61347-1 certified IEC/EN61347-2-13 certified ENEC certified CB report EN55015 compliant

Specifications (measured @ Ta= 25°C, 240VAC and rated load)

BASIC CHARACTERISTICS				
Parameter	Condition	Min.	Тур.	Max.
Input Voltage Range		198VAC	230VAC	264VAC
Inrush Current				8.0A
Start-up Time				50ms
Input Frequency Range		47Hz		63Hz
No Load Power Consumption				0.5W
Power Factor	full load, 230VAC			0.55
Internal Operating Frequency	full load	35kHz		140kHz
Output Ripple Voltage (1)	12Vout			700mVp-p
	24Vout			500mVp-p
Notes:				

 REGULATIONS

 Parameter
 Condition
 Value

 Output Accuracy
 ±5% max.

 Line Regulation
 3% max.

 Load Regulation
 3% max.

Note1: Measured at 20MHz Bandwidth using 0.1µF & 47µF parallel capacitor



RACV20-LP

Series

Specifications (measured @ Ta= 25°C, 240VAC and rated load)

PROTECTION			
Parameter	Condition	Value	
Input Fuse	external fuse is recommended	T1A	
Open Circuit Protection (OCP)		auto recovery after fault condition is removed	
Over Load Protection (OLP)		auto recovery after fault condition is removed	
Over Voltage Protection (OVP)		auto recovery after fault condition is removed	
Over Temperature Protection (OTP)	110°C Tcase	auto recovery after fault condition is removed	
Isolation Voltage	I/P to O/P	3.75kVAC / 1 minute	


Maximum loading of automatic circuit breakers

* @ 230VAC, 10hm, 90° phase angle and max. load

Circuit Breaker	Circuit Breaker Current			
Тур	10A	16A	20A	25A
В	11	18	23	29
С	24	39	49	61

ENVIRONMENTAL			
Parameter	Condition	Value	
Operating Temperature Range		-20°C to +45°C	
Maximum Case Temperature		+85°C	
Operating Altitude		2000m	
Operating Humidity	non-condensing	5% to 85% RH	
IP Rating		IP20	
Pollution Degree		PD2	
Design Lifetime		30 x 10 ³ hours	

Derating Graph

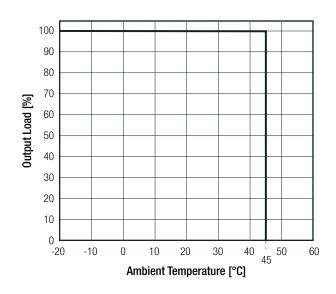



RACV20-LP

Series

L-3

Specifications (measured @ Ta= 25°C, 240VAC and rated load)

SAFETY AND CERTIFICATIONS		
Certificate Type (Safety)	Report Number	Standard
Lamp controlgear Part 1: General and safety requirements (CB Scheme)	305984	IEC61347-1:2007 2nd Edition + A2:2012
Lamp controlgear Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules (CB Scheme)	305984	IEC61347-2-13:2014 2nd Edition
Lamp controlgear Part 1: General and safety requirements (LVD)		EN61347-1:2015
Lamp controlgear Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules (LVD)		EN61347-2-13:2014 + A1:2017
Lamp controlgear Part 1: General and safety requirements	305984	EN61347-1:2008 + A2:2013
Lamp controlgear Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules	305984	EN61347-2-13:2014
DC or AC supplied electronic control gear for LED modules Performance requirements	305984-1	IEC62384:2006 1st Edition + A1:2009
DC or AC supplied electronic control gear for LED modules Performance requirements	305984-1	EN62384:2006 + A1:2009
EAC	RU-AT.49.09571	TP TC 004/2011
RoHS 2+		RoHS 2011/65/EU + AM2015/863
EMC Compliance	Condition	Standard / Criterion
zino compitanco	Oonanion	Standard / Officiality
Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment		EN55015:2013 + A1:2015
Limits and methods of measurement of radio disturbance characteristics of electrical	305984	
Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment		EN55015:2013 + A1:2015
Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment Equipment for general lighting purposes — EMC immunity requirements		EN55015:2013 + A1:2015 EN61547:2009
Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment Equipment for general lighting purposes — EMC immunity requirements Assessment of lighting equipment related to human exposure to electromagnetic fields	305984 ±8kV Air Discharge,	EN55015:2013 + A1:2015 EN61547:2009 EN62493:2015
Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment Equipment for general lighting purposes — EMC immunity requirements Assessment of lighting equipment related to human exposure to electromagnetic fields ESD Electrostatic discharge immunity test	305984 ±8kV Air Discharge, ±4kV Contact Discharge	EN55015:2013 + A1:2015 EN61547:2009 EN62493:2015 EN61000-4-2:2009, Criteria A
Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment Equipment for general lighting purposes — EMC immunity requirements Assessment of lighting equipment related to human exposure to electromagnetic fields ESD Electrostatic discharge immunity test Radiated, radio-frequency, electromagnetic field immunity test	±8kV Air Discharge, ±4kV Contact Discharge 3V/m ±0.5kV (DC Output)	EN55015:2013 + A1:2015 EN61547:2009 EN62493:2015 EN61000-4-2:2009, Criteria A EN61000-4-3:2006 + A2:2010, Criteria A
Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment Equipment for general lighting purposes — EMC immunity requirements Assessment of lighting equipment related to human exposure to electromagnetic fields ESD Electrostatic discharge immunity test Radiated, radio-frequency, electromagnetic field immunity test Fast Transient and Burst Immunity	±8kV Air Discharge, ±4kV Contact Discharge 3V/m ±0.5kV (DC Output) ±1kV (AC Input)	EN55015:2013 + A1:2015 EN61547:2009 EN62493:2015 EN61000-4-2:2009, Criteria A EN61000-4-3:2006 + A2:2010, Criteria A EN61000-4-4:2012, Criteria A
Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment Equipment for general lighting purposes — EMC immunity requirements Assessment of lighting equipment related to human exposure to electromagnetic fields ESD Electrostatic discharge immunity test Radiated, radio-frequency, electromagnetic field immunity test Fast Transient and Burst Immunity Surge Immunity	±8kV Air Discharge, ±4kV Contact Discharge 3V/m ±0.5kV (DC Output) ±1kV (AC Input) ±0.5kV (AC Input)	EN55015:2013 + A1:2015 EN61547:2009 EN62493:2015 EN61000-4-2:2009, Criteria A EN61000-4-3:2006 + A2:2010, Criteria A EN61000-4-4:2012, Criteria A EN61000-4-5:2014, Criteria A
Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment Equipment for general lighting purposes — EMC immunity requirements Assessment of lighting equipment related to human exposure to electromagnetic fields ESD Electrostatic discharge immunity test Radiated, radio-frequency, electromagnetic field immunity test Fast Transient and Burst Immunity Surge Immunity Immunity to conducted disturbances, induced by radio-frequency fields	±8kV Air Discharge, ±4kV Contact Discharge 3V/m ±0.5kV (DC Output) ±1kV (AC Input) ±0.5kV (AC Input) AC Power Port 3V	EN55015:2013 + A1:2015 EN61547:2009 EN62493:2015 EN61000-4-2:2009, Criteria A EN61000-4-3:2006 + A2:2010, Criteria A EN61000-4-4:2012, Criteria A EN61000-4-5:2014, Criteria A EN61000-4-6:2014, Criteria A
Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment Equipment for general lighting purposes — EMC immunity requirements Assessment of lighting equipment related to human exposure to electromagnetic fields ESD Electrostatic discharge immunity test Radiated, radio-frequency, electromagnetic field immunity test Fast Transient and Burst Immunity Surge Immunity Immunity to conducted disturbances, induced by radio-frequency fields Voltage Dips and Interruptions	±8kV Air Discharge, ±4kV Contact Discharge 3V/m ±0.5kV (DC Output) ±1kV (AC Input) ±0.5kV (AC Input) AC Power Port 3V Voltage Dips >95%	EN55015:2013 + A1:2015 EN61547:2009 EN62493:2015 EN61000-4-2:2009, Criteria A EN61000-4-3:2006 + A2:2010, Criteria A EN61000-4-4:2012, Criteria A EN61000-4-5:2014, Criteria A EN61000-4-6:2014, Criteria A EN61000-4-1:2004, Criteria B

DIMENSION and PHYSICAL CHARACTERISTICS			
Parameter	Туре	Value	
Material	case	plastic (UL94V-2)	
Dimension (LxWxH)		128.0 x 50.0 x 13.0mm	
Weight		75g	
	·		

www.recom-power.com REV.: 1/2018


continued on next page




RACV20-LP

Series

Specifications (measured @ Ta= 25°C, 240VAC and rated load)

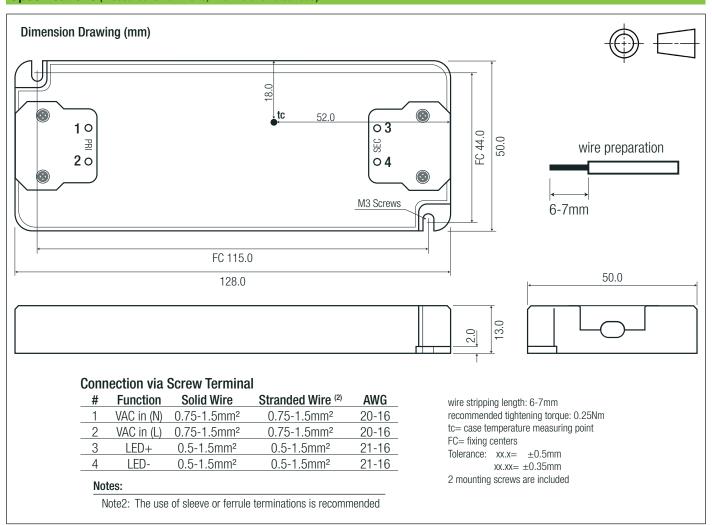

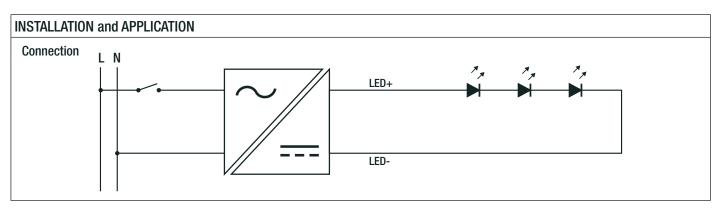

PACKAGING INFORMATION			
Parameter	Туре	Value	
Packaging Dimension (LxWxH)	pardhaard Day	265.0 x 139.0 x 62.0mm	
Packaging Quantity	cardboard Box	10pcs	
Storage Temperature Range		-20°C to +70°C	
Storage Humidity	non-condensing	5% - 85% RH	

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.