



★/☆ Festo core product range

Covers 80% of your automation tasks

Worldwide: Always in stock

Superb: Festo quality at an attractive price
Easy: Reduces procurement and storing complexity

★ Generally ready for shipping ex works in 24 hours Held in stock in 13 service centres worldwide More than 2200 product

☆ Generally ready for shipping ex works in 5 days Assembled for you in 4 service centres worldwide Up to 6 x 10¹² variants per product series



FESTO

Key features

At a glance

SDE5-...-M8 Plug version, plug M8x1, 3-pin













Linkable wall bracket with clip-in facility for sensors (included in the scope of delivery)

Product description

The pressure sensor SDE5 is a costeffective alternative for simple and quick pressure monitoring. The "intelligent fitting" delivers instant information about the current pressure and is an equally effective device for object detection via back pressure as it is for pressure, regulation and vacuum detection.

Main applications

The pressure sensor SDE5 can be used wherever simple sensing of the current pressure is required:

- Compressed air monitoring
- Regulator monitoring
- Suction confirmation in vacuum technology
- Object detection via back pressure

Features


- Selectable output functions
- Teach-in function for programming
- Minimal assembly times thanks to QS fittings and linkable wall bracket
- Quick switching-point adjustment at the touch of a button
- Switching status indicated by an LED visible from all sides
- Relative pressure or differential pressure measurement
- Five pressure measuring ranges: 0 ... -1, -1 ... 1, 0 ... 2, 0 ... 6, 0 ... 10 bar
- Analogue output: 0 ... 10 V
- Electrical outputs: 1 switching output PNP or NPN

Key features




Application examples

Vacuum monitoring

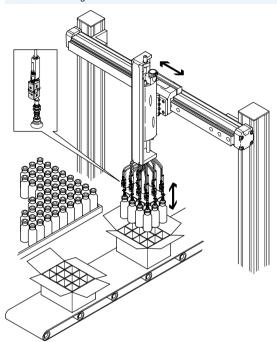


 Pressure sensor SDE5 in combination with a vacuum generator VN for vacuum monitoring in the handling of bottles

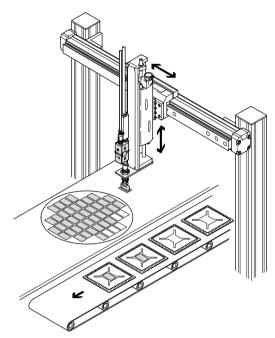


 Pressure sensor SDE5 as suction monitoring in the handling of small parts, such as computer chips

Pressure monitoring

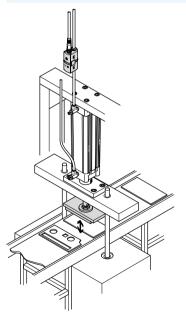

• Pressure sensor SDE5 as pressure monitor for the pressing in of punched parts

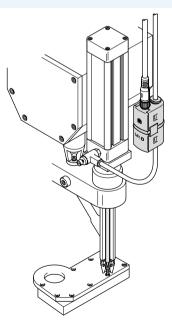

 Pressure sensor SDE5 as "inline variant" for pressure range monitoring on a compressed air screw driver

Pressure sensors SDE5 Peripherals overview




Peripherals overview 1 2

Mou	nting attachments and accessories	→ Page/Internet
1	Pressure sensor	6
	SDE5M8, plug version	
2	Pressure sensor	6
	SDE5K, cable version	
3	Wall bracket	_
	(included in scope of delivery)	
4	Connecting cable	13
	NEBU-M8W3 with angled plug socket	
5	Connecting cable	13
	NEBU-M8G3 with straight plug socket	



Type codes

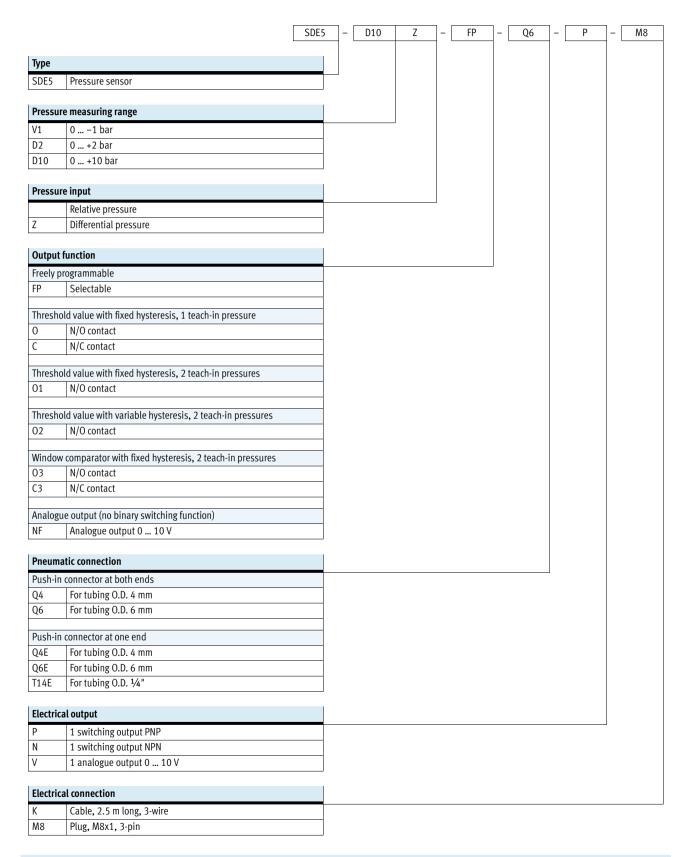

Additional variants can be ordered using the modular system ightharpoonup 12

- Pressure measuring range
- Pneumatic connectionElectrical accessories
 - ection
- X teach-in point permanently set
- Y teach-in point permanently set

• Output function


FESTO

Technical data

Function


Switching output PNP

Switching output NPN



Analogue output

P 1 BN +
4 BK RL
3 BU

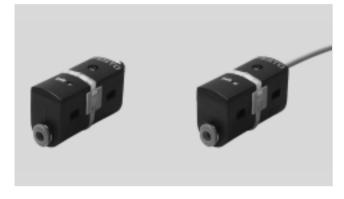

General technical data							
Type SDE5		-V1	-B2	-D2	-D6	-D10	
General information							
Certification		RCM trademark	ζ				
		cULus recogniz	ed (OL)				
CE mark (see declaration of confo	rmity)	To EU EMC Dire	ective				
		To EU RoHS Dir	ective				
KC mark		KC-EMC					
Note on materials		RoHS-compliant					
		·					
Input signal/measuring element							
Measured variable		Relative pressu	ıre				
		Differential pre	ssure				
Method of measurement		Piezoresistive	pressure sensor				
Pressure measuring range	[bar]	01	-1 +1	0 +2	0 +6	0 +10	
Operating medium		Compressed ai	r in accordance with I	SO 8573-1:2010 [7:4:4]		<u> </u>	
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)						
Temperature of medium	Temperature of medium [°C]		0 +50				
Ambient temperature	[°C]	0 +50					



1		
Electrical data		
Output, general ¹⁾		
Repetition accuracy ±FS	[%]	0.3
Temperature coefficient ±FS/K	[%]	0.05
Switching output		
Accuracy	[%]	0.5
Switching output ±FS ¹⁾		
Switching output		PNP
		NPN
Switching function		Freely programmable (switching/teach-in function, N/O contact, N/C contact)
		Threshold value with fixed hysteresis
		Threshold value with variable hysteresis
		Window comparator with fixed hysteresis
Switching element function		N/C contact
		N/O contact
		Switchable
Max. output current	[mA]	100
Voltage drop	[V]	Max. 1.8
Inductive protective circuit		Adapted to MZ, MY, ME coils
Analogue output		
Output characteristic curve	[V]	010
Accuracy	[%]	3 (ambient temperature 20 +25 °C)
Analogue output ±FS ¹⁾		4 (ambient temperature 0 +50 °C)
Linearity error ±FS ¹⁾	[%]	0.3

^{1) %} FS = % of the measuring range final value (full-scale)

Electrical data				
Output, additional data				
Protection against short circuit	Yes			
Electronics				
Operating voltage range DC [V]	15 30			
Protection against polarity reversal	For all electrical connections			
Electromechanics				
Electrical connection	Plug M8x1, 3-pin, round design, to EN 60947-5-2			
	Cable 2.5 m. 3-wire, to EN 60947-5-2			

Pin allocation		
Plug, M8x1, 3-pin	Pin	Meaning
1	1	Operating voltage +24 V DC
+ 2/4	2/4	Switching output or analogue output
3	3	0 V




Mechanics		
Type of mounting		Via accessories
Mounting position		Any
Pneumatic connection		QS-4
		QS-6
		QS1/4
		QS5/32
Product weight	[g]	19 (plug version)
		47 (cable version)
Product weight of wall bracket	[g]	5.5
Material of housing		PA PA
		POM

Display/operation		
Switching output		
Switching status display		Yellow LED
Threshold value setting range	[%]	0 100
Analogue output		
Ready status display		Green LED

Immissions/emissions	mmissions/emissions					
Storage temperature	[°C]	-20 +80				
Protection class		IP40				
Electrical protection class						
Corrosion resistance class	CRC ¹⁾	2				

¹⁾ Corrosion resistance class 2 according to Festo standard 940 070 Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

FESTO

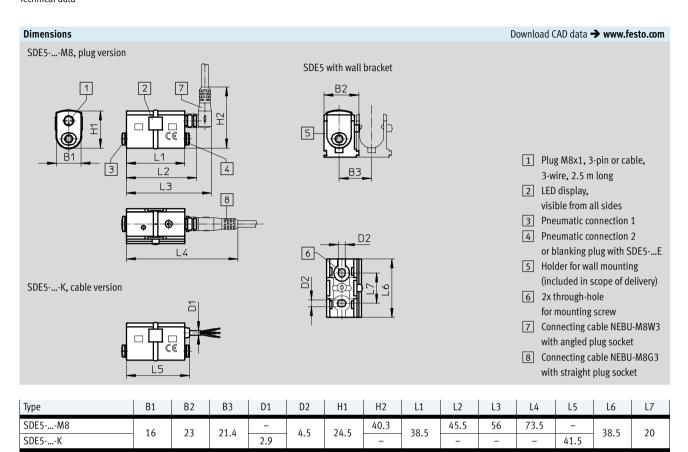





★ Core product range

Ordering data - N	Measured variable r	elative pressure					
Pressure measur-	Switching	Electrical output	Electrical connection	Pneumatic co	onnection	Part No.	Туре
ing range [bar]	element function			At one end	At both ends		
Freely programma	ble (switching/teach	n-in function, N/O co	ontact, N/C contact)				
01	Switchable	Switching output PNP	Plug, M8x1, 3-pin	-	QS-6	★ 542887	SDE5-V1-FP-Q6-P-M8
0 +10	Switchable	Switching output	Plug, M8x1, 3-pin	QS-4	_	★ 542900	SDE5-D10-FP-Q4E-P-M8
		PNP		QS-6	-	★ 542897	SDE5-D10-FP-Q6E-P-M8
				-	QS-6	★ 542898	SDE5-D10-FP-Q6-P-M8
			Cable, 3-wire	QS-4	-	★ 542901	SDE5-D10-FP-Q4E-P-K
				-	QS-6	★ 542899	SDE5-D10-FP-Q6-P-K
	ith fixed hysteresis,	· ·				T .	
01	N/O contact	Switching output	Plug, M8x1, 3-pin	QS-4	-	★ 527460	SDE5-V1-O-Q4E-P-M8
		PNP		QS-6	_	★ 527461	SDE5-V1-O-Q6E-P-M8
				_	QS-4	★ 527457	SDE5-V1-O-Q4-P-M8
				_	QS-6	★ 527458	SDE5-V1-O-Q6-P-M8
0 +2	N/O contact	Switching output PNP	Cable, 3-wire	QS-6	-	★ 542888	SDE5-D2-O-Q6E-P-K
0 +10	N/O contact	Switching output PNP	Plug, M8x1, 3-pin	QS-4	_	★ 527466	SDE5-D10-O-Q4E-P-M8
				QS-6	-	★ 527467	SDE5-D10-O-Q6E-P-M8
				-	QS-4	★ 527463	SDE5-D10-O-Q4-P-M8
				-	QS-6	★ 527464	SDE5-D10-O-Q6-P-M8
			Cable, 3-wire	QS-6	-	★ 542890	SDE5-D10-O-Q6E-P-K
	N/C contact	C contact Switching output PNP	Plug, M8x1, 3-pin	QS-4	_	★ 542889	SDE5-D10-C-Q4E-P-M8
				QS-6	_	★ 542894	SDE5-D10-C-Q6E-P-M8
			Cable, 3-wire	QS-6	-	★ 542895	SDE5-D10-C-Q6E-P-K
			es with mean value calcula	ation	1		
01	N/O contact	Switching output PNP	Plug, M8x1, 3-pin	-	QS-6	★ 542886	SDE5-V1-O1-Q6-P-M8
Threshold value w	rith variable hystere	sis, 2 teach-in press	sures				
0 +10	N/O contact	Switching output	*	QS-6	-	★ 542891	SDE5-D10-O2-Q6E-P-M8
		PNP		-	QS-6	★ 542892	SDE5-D10-02-Q6-P-M8
			· · · · · · · · · · · · · · · · · · ·		-		
Window comparat	or with fixed hyster						
0 +10	N/O contact	Switching output PNP	Cable, 3-wire	QS-6	-	★ 542893	SDE5-D10-O3-Q6E-P-K
	N/C contact	Switching output PNP	Cable, 3-wire	QS-6	-	★ 542896	SDE5-D10-C3-Q6E-P-K

[★] Generally ready for shipping ex works in 24 hours ★ Generally ready for shipping ex works in 5 days



Pressure measur-	Switching	Electrical output	Electrical connection	Pneumatic co	onnection	Part No.	Type
ing range [bar]	element function			At one end	At both ends		
Freely programma	ble (switching/teach	n-in function, N/O co	ontact, N/C contact)				
0 +10	Switchable	Switching output PNP	Plug, M8x1, 3-pin	QS1/4	-	567467	SDE5-D10-FP-T14E-P-M8
Threshold value w	ith fixed hysteresis,	1 teach-in pressure	1				
0 +10	N/O contact	Switching output PNP	Plug, M8x1, 3-pin	QS1/4	-	567468	SDE5-D10-O-T14E-P-M8
		Switching output	Plug, M8x1, 3-pin	-	QS-6	567473	SDE5-D10-O-Q6-N-M8
		NPN	Cable, 3-wire	-	QS-6	567469	SDE5-D10-O-Q6-N-K
Analogue output (no binary switching	function)					
01	-	Analogue output	Plug, M8x1, 3-pin	QS-6	-	567463	SDE5-V1-NF-Q6E-V-M8
		0 10 V		_	QS-6	567464	SDE5-V1-NF-Q6-V-M8
			Cable, 3-wire	QS-6	-	567470	SDE5-V1-NF-Q6E-V-K
0 +10	-	Analogue output	Plug, M8x1, 3-pin	QS-6	-	567465	SDE5-D10-NF-Q6E-V-M8
		0 10 V		-	QS-6	567466	SDE5-D10-NF-Q6-V-M8
			Cable, 3-wire	QS-6	-	567471	SDE5-D10-NF-Q6E-V-K
				_	QS-6	567472	SDE5-D10-NF-Q6-V-K

Ordering data - N	leasured variable d	lifferential pressure					
Pressure measur-	Switching	Electrical output	Electrical connection	Pneumatic connection		Part No.	Туре
ing range [bar]	element function			At one end	At both ends		
Freely programmable (switching/teach-in function, N/O contact, N/C contact)							
0 +10	Switchable	Switching output	Plug, M8x1, 3-pin	_	QS-6	567460	SDE5-D10Z-FP-Q6-P-M8
		PNP					
Threshold value w	ith fixed hysteresis,	1 teach-in pressure	!				
0 +10	N/O contact	Switching output	Plug, M8x1, 3-pin	-	QS-6	567462	SDE5-D10Z-O-Q6-P-M8
		PNP					

FESTO

Ordering data – Modular products

rdering table ze	5	Condi-	Code	Enter cod
20		tions	Couc	Zitter cou
Module No.	529027			529027
Function	Pressure sensor		SDE5	SDE5
Pressure measuring range [bar]	01		-V1	
	-1 1		-B2	
	0 2		-D2	
	0 6		-D6	
	0 10		-D10	
Pressure input	Relative pressure			
	Differential pressure		Z	
Output function	Freely programmable (switching/teach-in function, N/O contact, N/C contact)		-FP	
	Threshold value with fixed hysteresis, 1 teach-in point, N/O contact		-0	
	Threshold value with fixed hysteresis, 1 teach-in point, N/C contact		-C	
	Threshold value with fixed hysteresis, 2 teach-in points, N/O contact		-01	
	Threshold value with fixed hysteresis, 2 teach-in points, N/C contact		-C1	
	Threshold value with variable hysteresis, N/O contact		-02	
	Threshold value with variable hysteresis, N/C contact		-C2	
	Window comparator with fixed hysteresis, N/O contact		-03	
	Window comparator with fixed hysteresis, N/C contact		-C3	
	No binary switching function (analogue output)		-NF	
Pneumatic connection	Push-in connector 4 mm, at both ends		-Q4	
	Push-in connector 6 mm, at both ends		-Q6	
	Push-in connector 5/32, at both ends		-T532	
	Push-in connector 1/4, at both ends		-T14	
	Push-in connector 4 mm, at one end	4	-Q4E	
	Push-in connector 6 mm, at one end	4	-Q6E	
	Push-in connector 5/32, at one end	4	-T532E	
	Push-in connector 1/4, at one end	4	-T14E	
Electrical output	1 switching output PNP	5	-P	
	1 switching output NPN	5	-N	
	1 analogue output 0 10 V	6	-V	
Electrical connection	Cable, 2.5 m		-K	
	Plug M8, 3-pin		-M8	
Electrical accessories	Connecting cable, straight socket, 2.5 m	1	-G	
	Connecting cable, angled socket, 2.5 m	1	-W	
	Connecting cable, straight socket, 5 m	1	-G5	
	Connecting cable, angled socket, 5 m	1	-W5	
X teach-in point permanently set in bar	-0.85 10 ¹⁾	2	X	
X teach-in point negative	Negative range	7	V	
Y teach-in point permanently set in bar	-0.85 10 ¹⁾	23	Ү	
Y teach-in point negative	Negative range	8	٧	

	y teach-in point pe	each-in point permanently set in bar -0.85 10 ¹⁷					2 3	Y			
	Y teach-in point ne	gative	Negative range						8	V	
	,	in combination with M8				5	P, N	Not in combination with output			
	_	n combination with O, C				6	٧	Only in combination with outpu	t function NF		
[3 X, Y Not in	n combination with FP, 01, C1,	NF			7	٧	Only in combination with B2 an	d X teach-in po	int in the negativ	e range,
	Must	have a value if 02, C2, O3, C3						but then mandatory entry			
	and X	or Y was selected				8	٧	Only in combination with B2 an	d Y teach-in po	int in the negativ	e range,
	Only	one decimal place permissible	in combination with D1	0				but then mandatory entry			
Sensor without Edit button, switching point cannot be changed											
[4 Q4E, Q6E, T532E, T	Q4E, Q6E, T532E, T14E									
	Not in	n combination with pressure in	put Z								
	1) Permitted value range. The value for the permanently set teach-in point must always be within the chosen pressure measuring range V1, B2, D2, D6, D10. Note on V1: Enter the teach-in pressure without a sign. Note on B2: Enter the teach-in pressure for vacuum without a sign, but with a suffixed "V", see 7 or 8.										
Transfer order code											
529027 SDE5						-					



Accessories

Ordering data – 0	Connecting cable NEBU-M8				Te	echnical data 🗲 Internet: nebu
	Electrical connection	Number of wires	Cable length [m]	Order code ¹⁾	Part No.	Туре
	M8x1, straight plug socket	3	2.5	G	★ 541333	NEBU-M8G3-K-2.5-LE3
6 M		3	5	G5	★ 541334	NEBU-M8G3-K-5-LE3
	M8x1, angled plug socket	3	2.5	W	★ 541338	NEBU-M8W3-K-2.5-LE3
SW TO SERVICE STATE OF THE SER		3	5	W5	★ 541341	NEBU-M8W3-K-5-LE3

¹⁾ When ordering using the modular system \rightarrow 12