

PIN BUSBAR, 16SQMM 56MW, 4PHASES,  
SLICEABLE FOR MCB 2P AND RCBO 1P+N SAFE TO  
TOUCH WITHOUT END CAPS

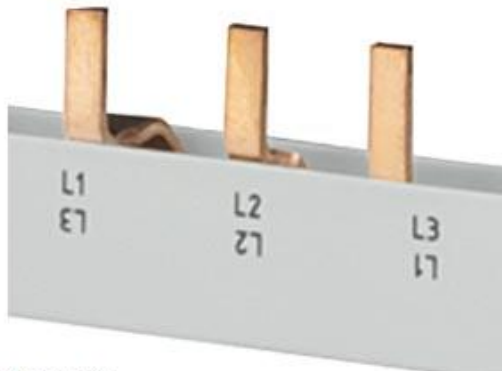


Figure similar

Model		
product brand name		SENTRON
Product designation		Pin busbar
Design of the product		PIN BB 16mm <sup>2</sup> , 56MW, 4P, CAN BE CUT
Busbar design		laminated

General technical data		
Surface processing / tin-plated		No

Main circuit		
Operating current / Rated value	A	80

Product details		
Product property / flexible		Yes

Mechanical Design		
Width	mm	21.4
Length	mm	1 000
Thickness / of busbar	mm	17.3
Net weight	g	779.49
Material / of the busbar		SF-Cu F 24

General Product Approval	other
--------------------------	-------



[other](#)

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5ST37703>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5ST37703/all>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mfb=5ST37703](http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=5ST37703)

### CAX-Online-Generator

<http://www.siemens.com/cax>

### Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

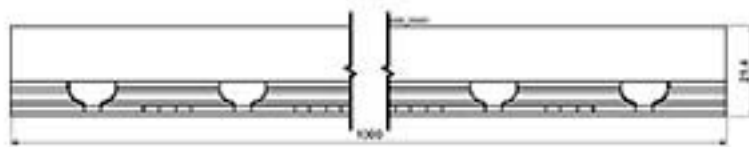

last modified:

05.05.2015