

Signal lights / Rotating Beacon

Rotating Mirror Beacon LED 24VAC/DC RD





MECHANICAL DATA		
Height	200 mm	
Diameter	98 mm	
Materials	PC PC/ABS	
Dome colour	Red	
Housing colour	Black	
Protection category	IP65	
Connection	Screw terminals	
cross-sectional area maximum	1,50mm ² / 16AWG	
Cable entry	Through hole	
Cable entry minimum	d = 5 mm	
Cable entry maximum	d = 7 mm	
Type of fixing	Tube mounting	
Working temperature minimum	-30°C	
Working temperature maximum	+50°C	
Weight with packaging	415 g	
Product weight	340 g	

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	175 mA	
Rated inrush current	<10A	
Protection class	Protection class 2	
Pollution degree	3	
Overvoltage category	II	

OPTICAL DATA		
Light source	LED	
Light colour	Red	
Optical signal image	Revolving	
Service life optical	50,000 h maximum	
Rotation speed (rpm)	180 U/min	

APPROVAL DATA	
Conforms with CE	Yes

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Signal lights / Rotating Beacon

Rotating Mirror Beacon LED 24VAC/DC RD

WEEE	Yes
Conforms with RED directive	No
Conforms with ATEX-directive	No
Conforms with CCC-Ex	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.





Signal lights / Rotating Beacon

Rotating Mirror Beacon LED 24VAC/DC RD

DRAWING

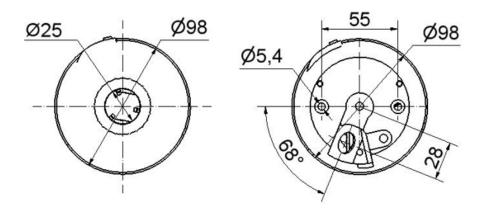

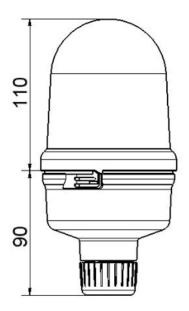

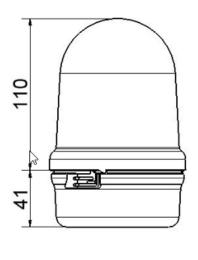

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.