

# PRODUCT DATASHEET

## LN COMP HO 1200 20 W 3000 K

**LINEAR COMPACT HIGH OUTPUT | Compact single or light line luminaire with high luminous flux**

---

### AREAS OF APPLICATION

- Direct replacement for luminaires with fluorescent lamps
- Indoor applications
- Corridors, entrance areas, stairwells, living rooms, basements
- Accent lighting
- Public areas
- Cove lighting
- Shelves, furniture integration or under cabinet mounting
- Seamless linear lighting

---

### PRODUCT BENEFITS

- Compact dimensions
- Little space required thanks to compact dimensions
- Seamless connection of up to 10 luminaires in a line
- High lumen output up to 2500 lm
- Seamless connection without visible cables when connected to Linear Compact Batten
- Low flicker light thanks to special electronic control gear
- Angled connection possible with included cable
- Flexible installation in 2 different angles with 2 different mounting options
- Flexible application due to a wide range of available lengths of 600 to 1500 mm
- 5 years guarantee

---

### PRODUCT FEATURES

- Replacement for traditional T8 or T5 luminaires
- Up to 10 luminaires connectable



- Translucent end caps
- Linear Compact Batten connectable at the beginning of the row with wiring on back side
- Versions with luminous flux 1000...2500 lm available
- 4 different lengths available
- High luminous efficacy: up to 100 lm/W
- Glow Wire Test according to IEC 60695-2-12: 850 °C

## TECHNICAL DATA

### Electrical data

<b>Nominal wattage</b>	20.00 W
<b>Operating mode</b>	Integrated LED driver
<b>Nominal voltage</b>	220...240 V
<b>Power factor <math>\lambda</math></b>	>0.5
<b>Mains frequency</b>	50/60 Hz

### Luminaire control gear data

<b>Ouput current</b>	220 mA
<b>Max. no. of lum. on circuit break. C10 A</b>	23
<b>Max. no. of lum. on circuit break. C16 A</b>	37

### Photometrical data

<b>Color temperature</b>	3000 K
<b>Luminous flux</b>	2000 lm
<b>Luminous efficacy</b>	100 lm/W
<b>Standard deviation of color matching</b>	<5 sdc <sub>m</sub>
<b>Light color (designation)</b>	Warm White
<b>Color rendering index Ra</b>	>80

### Light technical data

<b>Beam angle</b>	140 °
-------------------	-------

Dimensions & weight



<b>Length</b>	1173 mm
<b>Width</b>	24.0 mm
<b>Height</b>	36.0 mm
<b>Product weight</b>	410.00 g

Colors & materials

<b>Body material</b>	Polycarbonate (PC)
<b>Housing color</b>	White
<b>Product color</b>	White
<b>Cover material</b>	Polycarbonate (PC)

Temperatures & operating conditions

<b>Ambient temperature range</b>	-20...40 °C
----------------------------------	-------------

Lifespan

<b>Lifespan L70 at 25 °C</b>	50000 h
<b>Lifespan L80 at 25 °C</b>	40000 h
<b>Lifespan L90 at 25 °C</b>	30000 h

Additional product data

<b>Mounting type</b>	Surface
<b>Mounting location</b>	Ceiling / Wall


Capabilities

<b>Dimmable</b>	No
<b>Type of connection</b>	Screw terminal, 2-Pole (L,N)
<b>LED module replaceable</b>	Not replaceable
<b>Ball shot safe</b>	No

Certificates & standards

Protection class IK (shock resistance)	IK03
Glow Wire Test according to IEC 695-2-1	850 °C
Photobiological safety group EN62778	RG 0
Protection class	I
Type of protection	IP20
Standards	CE/CB/TÜV SÜD/EAC/RoHS

Light Distribution

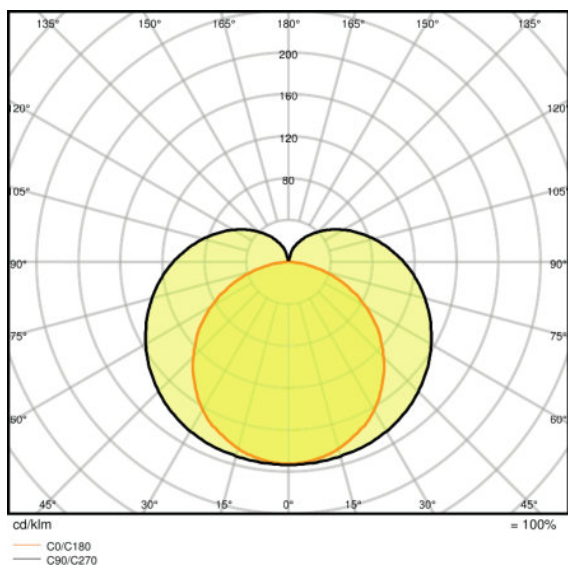

LDC typ polar

EQUIPMENT / ACCESSORIES

- All required accessories included

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075106314	Folding carton box 1	1380 mm x 40 mm x 30 mm	525.00 g	1.66 dm <sup>3</sup>
4058075106321	Shipping carton box 25	1418 mm x 233 mm x 180 mm	12410.00 g	59.47 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

#### REFERENCES / LINKS

For Guarantee see

▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.